


LK41 3M AMAZON MONKEY BARS ONLY* OWNER'S MANUAL

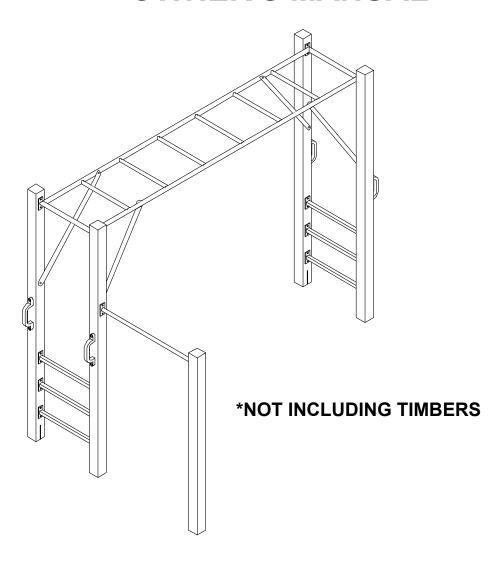

WARNING!

The disassembled product may contain small parts which pose a choking hazard to children under 3.

IMPORTANT:

This product may contain sharp points and small parts prior to assembly.

The owner's manual contains safety, assembly, use and maintenance instructions. This product must be assembled by an adult who has read and understood these instructions. Keep the packaging away from children and dispose of all packaging before use.

For the installer and your children's safety, it is important to fully read and understand the instructions and safety hazards before commencing the assembly of the product.

((

TABLE OF CONTENTS

1.	GEN	IERAL SAFETY INSTRUCTIONS	3
	1.1	DANGER FOR CHILDREN	3
	1.2	RISK OF INJURIES	3
	1.3	PRODUCT DAMAGE	3
	1.4	ASSEMBLY ADVICE	4
2.	SAFI	ETY INSTRUCTIONS	7
3.	ASSI	EMBLY INSTRUCTIONS	8
4.	MAIN	NTENANCE	10
5.	CLEANING		11
6.	WAR	RRANTY	11

GENERAL SAFETY

This product is intended for indoor and outdoor, domestic use only.

Weight Limit: 50kg per bar

Maximum Fall Height: 1995mm

1.1 DANGER FOR CHILDREN

WARNING! No eating while using the product

Children do not recognize potential dangers from this product. The product must be stored out of

reach of children and pets.

This product may only be used with adult supervision at all times.

The packaging material is not suitable for children due to choking and suffocation hazards.

1.2 RISK OF INJURIES

Do not use the product if it is damaged or defective. If it is damaged or defective, please contact a

qualified technician.

Check the product before each use. Defective parts must be changed immediately as they can

impair the function and the safety of the product.

No more than one person to use the product at the same time.

Use the product only on even and non-slipping surfaces. Never use it near water and keep sufficient

space around for safety.

Beware of moving parts such as the springs or elastics, which could catch your arms and legs. Do

not place any objects or body parts in the product's openings.

1.3 PRODUCT DAMAGE

Do not make alterations to the product. Only use original spare parts. Qualified technicians should

only carry out repairs - improper repairs can lead to danger for the user. Use this product only as

described in this manual.

Protect the product against splashes, humidity, high temperature and direct sunlight.

3

1.4 ASSEMBLY ADVICE


- The assembly of the product must be done carefully and by an able-bodied adult. If in any doubt, ask a technically qualified person.
- Before you start with the assembly, read the instructions carefully.
- Remove all packaging materials and lay down all parts on an open space. This gives you an
 overview and simplifies the assembly procedure.
- Check with the parts list that all parts are available. Dispose of the packaging material when the assembly is completed.
- Beware that when using tools or doing technical work, there is always a risk of injuries. Assemble
 the product with care.
- Create a danger free environment; for example, do not let tools lay around the workspace. Store the
 packaging material in a way that cannot cause any danger.
- After installing the product according to the instruction manual, en sure all screws, bolts and nuts
 are correctly installed and tightened and that all joints are secure.
- Reasonable space must be kept between the product and possible sources of danger, such as other equipment swimming pools and fences.
- The product must be assembled correctly before use.
- Place the product on a level surface at least 2 m from any structure or obstruction such as a fence,
 garage or house.
- Modifications made to the original product shall be carried out according to the instructions of the manufacturer.
- The product must always be used in a well-lit area.
- Do not place anything under the product.
- Use gloves during assembly and disassembly.
- Outdoor products should be equipped with a device that in strong wind conditions avoid displacement due to wind (e.g. steel bars in the ground or loads like sand bag or water bags).
- In certain areas during winter, snow buildup and the low temperatures can damage the product. It is recommended to remove snow buildup and to store the product indoor.

 We strongly recommend visual inspections every 3 months to insure the integrity of the entire product. Replace any parts as necessary.


ANCHORING

Note: the unit can be anchored directly into the ground using the anchors provided.

You may also use cement for additional stability, please follow the below instructions.



- Install the provided anchors (e) by screwing them in at positions (d)
- Dig a 350mm³ hole in the ground positioned under the feet of the unit that you wish to concrete anchor.
- Fill hole with cement and insert leg with anchor attached into cement



- A minimum of 5 cm depth below ground level of concrete anchoring is needed.

Consumer information sheet for playground surfacing materials

The US Consumer Product Safety Commission (CPSC) estimates that about 100 000 playground equipment-related injuries resulting from falls to the ground surface are treated annually in US hospital emergency rooms. Injuries involving this hazard pattern tend to be among the most serious of all playground injuries, and have the potential to be fatal, particularly when the injury is to the head. The surface under and around playground equipment can be a major factor in determining the injury-causing potential of a fall. It is self-evident that a fall on to a shock-absorbing surface is less likely to cause a serious injury than a fall onto a hard surface. Playground equipment should never be placed on hard surfaces, such as concrete or asphalt, and while grass may appear to be acceptable, it may quickly turn to hard-packed earth in areas of high traffic. Shredded bark mulch, wood chips, fine sand or fine gravel are considered to be acceptable shock absorbing surfaces when installed and maintained at a sufficient depth under and around playground equipment.

Table B.1 lists the maximum height from which a child would not be expected to sustain a life-threatening head injury in a fall on to four different loose-fill surfacing materials if they are installed and maintained at depths of 150 mm, 225 mm and 300 mm.

Table B.1 — Fall height in millimetres from which a life-threatening head injury would not be expected

Type of material	Depth of surfacing material			
rype of material	150 mm	225 mm	300 mm	
Double shredded bark mulch	1 800	3 000	3 300	
Wood chips	1 800	2 100	3 600	
Fine sand	1 500	1 500	2 700	
Fine gravel	1 800	2 100	3 000	

However, it should be recognised that all injuries due to falls cannot be prevented, no matter what surfacing material is used.

It is recommended that a shock absorbing material extend a minimum of 1 800 mm in all directions from the perimeter of stationary equipment such as climbing frames and slides. However, because children may deliberately jump from a moving swing, the shock absorbing material should extend in the front and rear of a swing a minimum distance of twice the height of the pivot point measured from a point directly beneath the pivot on the supporting structure.

This information is intended to assist in comparing the relative shock-absorbing properties of various materials. No particular material is recommended over another. However, each material is only effective when properly maintained. Materials should be checked periodically and replenished to maintain correct depth as determined necessary for the equipment in question. The choice of a material depends on the type and height of the playground equipment, the availability of the material in a particular area, and its cost.

2 SAFETY INSTRUCTIONS

- The safety instructions of the product should always be considered and obeyed.
- Using the product may result in permanent injury such as paralysis, or even death. Falling off the
 product may lead to injuries, particularly to the back, neck or head.
- No clothes with hooks or lose parts should be worn or carried during product usage in order to avoid hooks getting caught and causing injury.
- Strong winds can result in the product being blown away or damaged. If strong winds are predicted the product must be disassembled and moved to a sheltered area or sufficiently anchored down.
- Moving the product whilst assembled may affect the integrity of the frame. Should it be necessary to move the product, please consider the following:
 - 1.) Force to be evenly spaced around the frame to lift the product off the ground
 - 2.) The product must be carried horizontally
 - 3.) Use caution whilst moving as it could bend the product frame.
- Users should be familiar with the assembly manual. This manual contains assembly guidance;
 selected precautionary measures as well as recommendations for servicing and maintenance of the product, in order to ensure a secured and fun use of the product.
- It is the responsibility of the owner or the supervisor to guarantee that all users of the product are informed sufficiently of all warning references and safety instructions.

For the supervisor:

The supervisor's role is to make sure users are aware of all safety precautions and that these precautions are enforced. When a supervisor is not available, the product may be disassembled or covered to limit access.

- The product can be only used if it is in good condition, worn or damaged parts should be replaced.
- Objects, which could be dangerous to the user, should be away from the product
- Avoid unauthorized and unsupervised use of the product.
- Do not use the product under influence of alcohol or drugs (incl. medicines).
- Do not use the product as a jumping platform for other articles.

3 ASSEMBLY INSTRUCTION

A		1PC
В		6PCS
С		1PC
D	M8*90	12PCS
Е		4PCS
F	Ø8*50	28PCS
G	Large Small	S: 32pcs L: 12pcs
Н	M8*42	10PCS
K	M8*42	8PCS
L	M8*42	4PCS
4	<u>~~~</u>	5PCS
5	(o ()	4PCS

RECOMMENDATIONS:

The play structure must be securely assembled.

For safety reasons, the cement cubes must be poured 5cm below ground level, at the frame's outer

angles.

The play structure must not be installed directly on cement, asphalt, or any other hard surface.

Your play structure must be attached on a flat horizontal surface with a minimum of 2m between it

and any structure or obstacle such as a fence, garage house, tree branches, cloths lines, or electric

cables.

4 MAINTENANCE

WARNING: Please keep for future reference

We recommend regular maintenance to be conducted at the beginning of each season as well as at regular

intervals during the usage session for your play equipment to ensure all main parts/fixings are tightly

secured, well-oiled and intact to avoid failure, injury or hazards.


GENERAL ADVICE

It is of particular importance that this is followed at the beginning of each season as well as at regular

intervals during the usage season.

9

Not including timbers

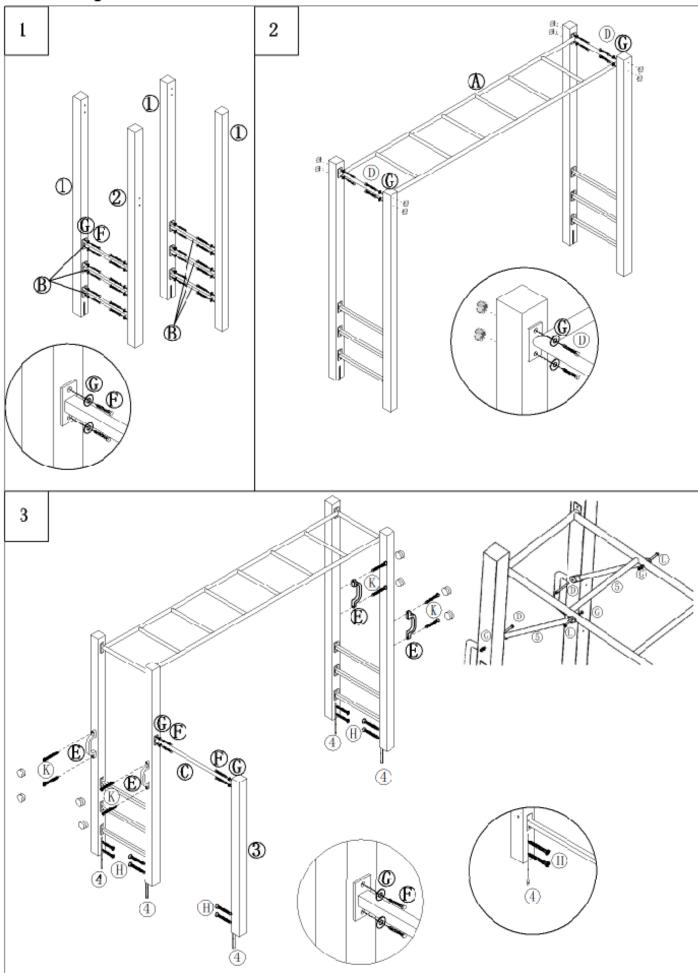

RECOMMENDATIONS:

The play structure must be securely assembled.

For safety reasons, the cement cubes must be poured 5cm below ground level, at the frame's outer

angles.

The play structure must not be installed directly on cement, asphalt, or any other hard surface.

Your play structure must be attached on a flat horizontal surface with a minimum of 2m between it

and any structure or obstacle such as a fence, garage house, tree branches, cloths lines, or electric

cables.

4 MAINTENANCE

WARNING: Please keep for future reference

We recommend regular maintenance to be conducted at the beginning of each season as well as at regular

intervals during the usage session for your play equipment to ensure all main parts/fixings are tightly

secured, well-oiled and intact to avoid failure, injury or hazards.

GENERAL ADVICE

It is of particular importance that this is followed at the beginning of each season as well as at regular

intervals during the usage season.

1. Check the accessories monthly as well as the play equipment's structure in order to prevent falling

risks.

2. Check and retighten screws, bolts and all other hardware elements as necessary.

a. Do not over tighten to avoid damaging the thread or cracking the surrounding wood.

3. Check all coverings and bolts for sharp edges and replace when required.

4. Lubricate all moving metallic parts.

5. When signs of oxidation and / or rust appear on various metallic parts of your equipment, sand

rusted areas and tubular members and repaint using a non-lead based paint when required.

6. Where applicable: check swing seats, chains, ropes and other means of attachment for evidence of

deterioration.

7. Replace when required in accordance with the owner's manual.

11

If your play structure is disassembled, be sure to clearly mark any attached metal plates to prevent accidents. Check all bolt covers and sharp edges and replace them if necessary.

For longer accessory life, we suggest storing them during the winter.

5 CLEANING

Do not use any abrasive cleansers for the cleaning. Use a soft, damp cloth to eliminate dirt and dust.

6 WARRANTY

AUSTRALIAN CONSUMER LAW

Many of our products come with a guarantee or warranty from the manufacturer. In addition, they come with guarantees that cannot be excluded under the Australian Consumer law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage.

You are entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. Full details of your consumer rights may be found at www.consumerlaw.gov.au

Please visit our website to view our full warranty terms and conditions: http://www.lifespankids.com.au/Warranty-Policy-Kids

Please send all warranty and support inquiries through our ticketing system via the email address: support@lifespankids.com.au.