
USER MANUAL

Junior Jungle All Combinations Assembly

Boxes LK376, LK377, LK378, LK379, LK380, LK381

Find the Digital Manual Online

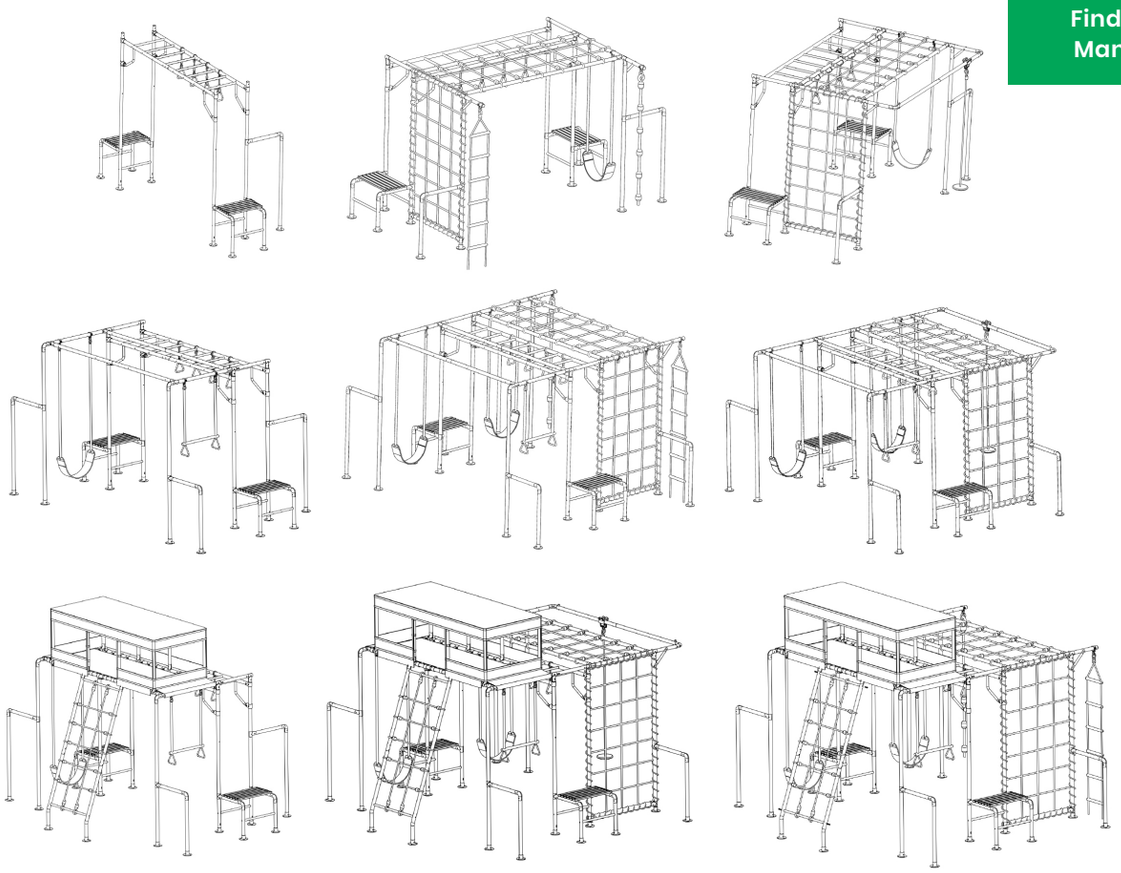

WARNING: The disassembled product may contain small parts which pose a choking hazard to children under 3.

IMPORTANT:
This product may contain sharp points and small parts prior to assembly. The owner's manual contains safety, assembly, use and maintenance instructions. This product must be assembled by an adult who has read and understood these instructions. Keep the packaging away from children and dispose of all packaging before use.

For the installer and your children's safety, it is important to fully read and understand the instructions and safety hazards before commencing the assembly of the product.

NOTE:
This manual should not be used to guide your purchasing decision. Your product, and the contents inside its carton, may vary from what is listed in this manual. This manual may also be subject to updates or changes. Updated manuals are available through our website at ***www.lifespankids.com.au.***

TABLE OF CONTENTS

I. COMBINATIONS LIST 3

II. PARTS LIST 4

A.1 Box LK376 (Parts List) 4

A.2 Box LK376 (Accessories List) 5

B.1 Box LK377 (Parts List) 6

B.2 Box LK377 (Accessories List) 7

C.1 Box LK378 (Parts List) 8

C.2 Box LK378 (Accessories List) 8

D. Box LK379 (Accessories List) 9

E.1 Box LK380 (Parts List) 10

E.2 Box LK380 (Accessories List) 11

F.1 Box LK381 (Parts List) 12

F.2 Box LK381 (Accessories List) 13

III. ASSEMBLY INSTRUCTIONS 14

Junior Jungle 1.0 (LK376) 14

Junior Jungle 2.1 (LK376 + LK377) 20

Junior Jungle 2.3 (LK376, LK377, LK378 & LK379) 30

Junior Jungle 2.0 (LK376 + LK380) 33

Junior Jungle 3.0 (LK376, LK377 & LK380) 40

Junior Jungle 3.1 (LK376, LK377, LK378, LK379 & LK380) 46


Junior Jungle 2.2 (LK376, LK380 & LK381) 52

Junior Jungle 4.2 (LK376, LK377, LK378, LK379, LK380 & LK381) 62


Junior Jungle 4.1 (LK376, LK377, LK380 & LK381) 72

I. COMBINATIONS LIST


Combination 1
Junior Jungle 1.0
(LK376)
Refer to assembly on Page 14




Combination 2
Junior Jungle 2.1
(LK376+377)
Refer to assembly on Page 20

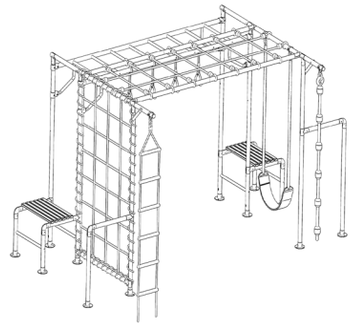


Combination 3
Junior Jungle 2.3
(LK376+377+378+379)
Refer to assembly on Page 30




Combination 4
Junior Jungle 2.0
(LK376+380)
Refer to assembly on Page 33

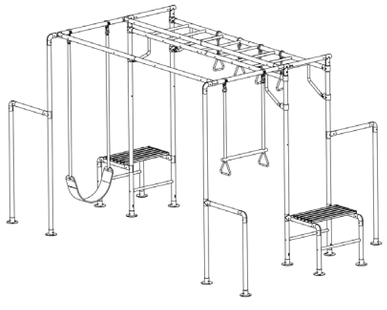


Combination 5
Junior Jungle 3.0
(LK376+377+380)
Refer to assembly on Page 40

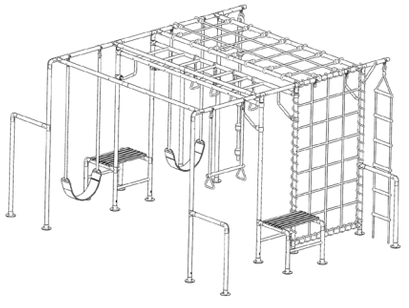


Combination 6
Junior Jungle 3.1
(LK376+377+378+379+380)
Refer to assembly on Page 46

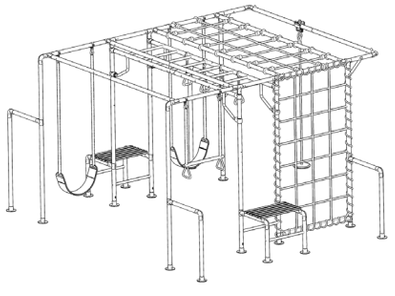


Combination 7
Junior Jungle 2.2
(LK376+380+381)
Refer to assembly on Page 52



Combination 8
Junior Jungle 4.2
(LK376+377+378+379+380+381)
Refer to assembly on Page 62

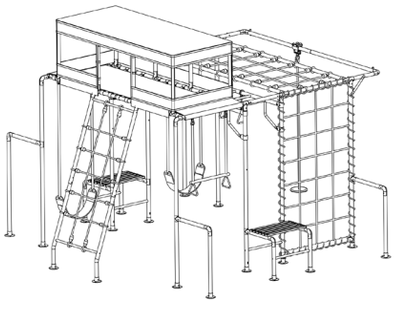

Combination 9
Junior Jungle 4.1
(LK376+377+380+381)
Refer to assembly on Page 72

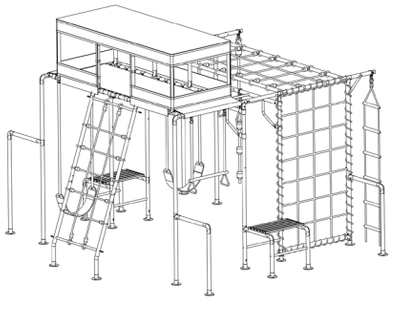


II. PARTS LIST

A.1 BOX LK376 (PARTS LIST)

FC2601AL x 1pc




FC2601AR x 1pc




FC2601BR x 1pc



FC2601BL x 1pc




FC2602 x 4pcs




FC2604 x 1pc



FC2605 x 1pc



FC2607 x 12pcs



FC2608 x 4pcs




FC2609 x 4pcs




FC2611 x 4pcs



FC2606 x 8pcs



FC2603 x 4pcs



Used for connecting to parts in Box LK377/LK379



FC2610 x 2pcs



BR02 x 8pcs

Nut / Washer / Bolt




A M8x48mm
8pcs

A.2 BOX LK376 (ACCESSORIES LIST)



BR01 x 10pcs



BR02 x 10pcs



KA 08 x 9pcs



E Anchor x 9pcs

Nut / Washer / Bolt



A M8x48mm
29+1pcs



B M8x50mm
12pcs



F M8x35mm
16pcs

Nut / Washer / Bolt



C M8x42mm
4pcs


Nut / Washer / Bolt



D M8x60mm
24+1pcs




BR06 x 8pcs



Looped Handle x 4pcs

Tools - Allen Key



x4

B.1 BOX LK377 (PARTS LIST)


FC2612 x 2pcs



FC2613 x 1pc



FC2614 x 1pc



FC2615 x 1pc




FC2604 x 1pc



FC2616 x 2pcs



FC2617A x 2pcs



FC2617B x 2pcs




FC2618 x 1pc




B.2 BOX LK377 (ACCESSORIES LIST)


CT3771 x 1pc
2480 x 1020mm

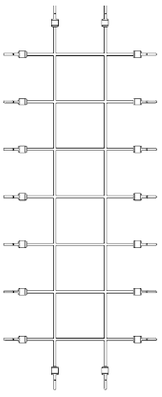

CB3772 x 1pc
1900 x 1020mm



Swing Seat
SS3773 x 1pc




Climbing Rope
SS3774 x 1pc




Rope Ladder
SS3775 x 1pc



Hanging Bracket
Top x 4pcs



Hanging Bracket
Bottom x 4pcs




Zip Tie x 6pcs




Rope x 1pc





BR01 x 2pcs



BR02 x 20pcs



KA 08 x 3pcs



E Anchor x 3pcs

Nut / Washer / Bolt



A M8x48mm
26+1pcs

Nut / Washer / Bolt



C M8x42mm
12pcs




G M8x15mm
8pcs

C. BOX LK378 (PARTS LIST)


FC2619 x 1pc



D. BOX LK379 (ACCESSORIES LIST)

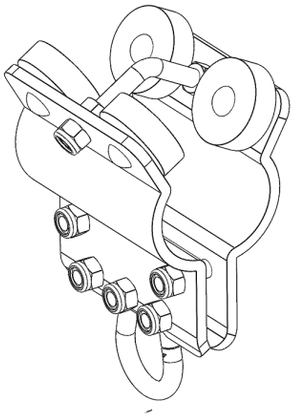

Flying fox wheel set x 1pc




Stopper x 2pcs



BR01 x 4pcs


Rope Disc x 1pc

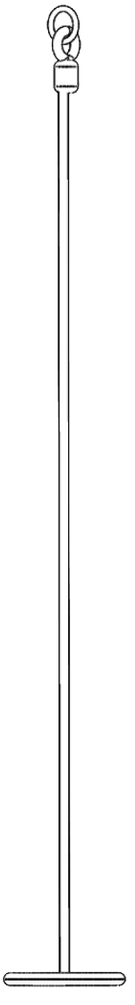

Nut / Washer / Bolt



A M8x48mm
4pcs



E M8x65mm
2pcs

E.1 BOX LK380 (PARTS LIST)

FC2621A x 2pcs



FC2621B x 2pcs




FC2615 x 1pc



FC2604 x 2pcs




FC2605 x 1pc



FC2626 x 2pcs



FC2627 x 1pc fit to the high swing bar




FC2628 x 1pc to the low swing bar




E.2 BOX LK380 (ACCESSORIES LIST)



BR01 x 8pcs



BR02 x 12pcs



KA 08 x 4pcs




E Anchor x 4pcs




G M8x15mm 8pcs

Hanging Bracket Top x 4pcs



Hanging
Bracket Bottom x 4pcs



Nut / Washer / Bolt



A M8x48mm
24+1pcs

Nut / Washer / Bolt




C M8x42mm
8pcs

Swing Seat
SS3773 x 1pc




Trapeze Bar
SS3801 x 1pc




F.1 BOX LK381 (PARTS LIST)


FC2622A x 2pcs




FC2622B x 2pcs

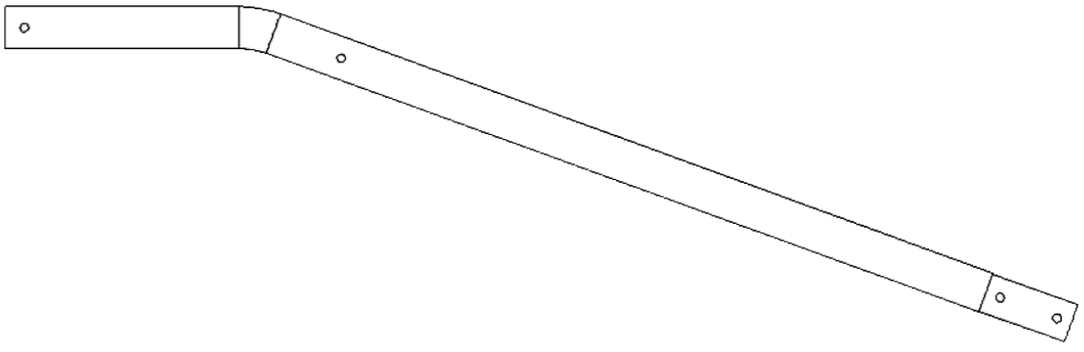


FC2623 x 8pcs



FC2624 x 4pcs




FC2625 x 2pcs




F.2 BOX LK381 (ACCESSORIES LIST)


Canopy CC3776
2140x750x940mm

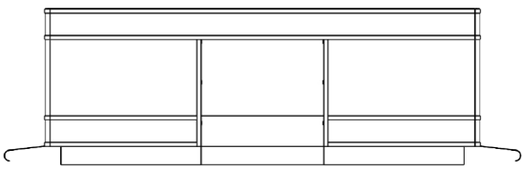

Platform Mat CM3775
2510x930mm

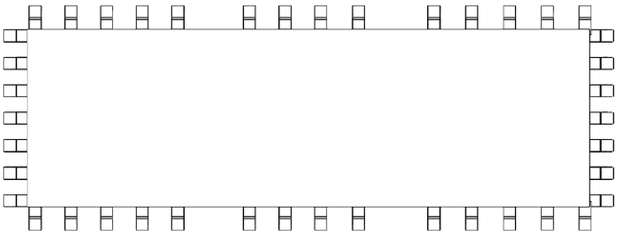


Climbing Net CS3774
1760x880mm

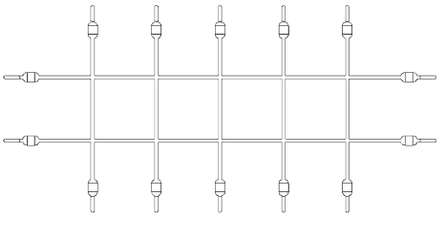




BR01 x 16pcs



BR02 x 20pcs



KA 08 x 2pcs



E Anchor x 2pcs

Nut / Washer / Bolt




A M8x48mm
36+1pcs

Nut / Washer / Bolt




C M8x42mm
4pcs




B M8x50mm
4pcs

III. ASSSEMBLY INSTRUCTIONS

JUNIOR JUNGLE 1.0 (LK376)

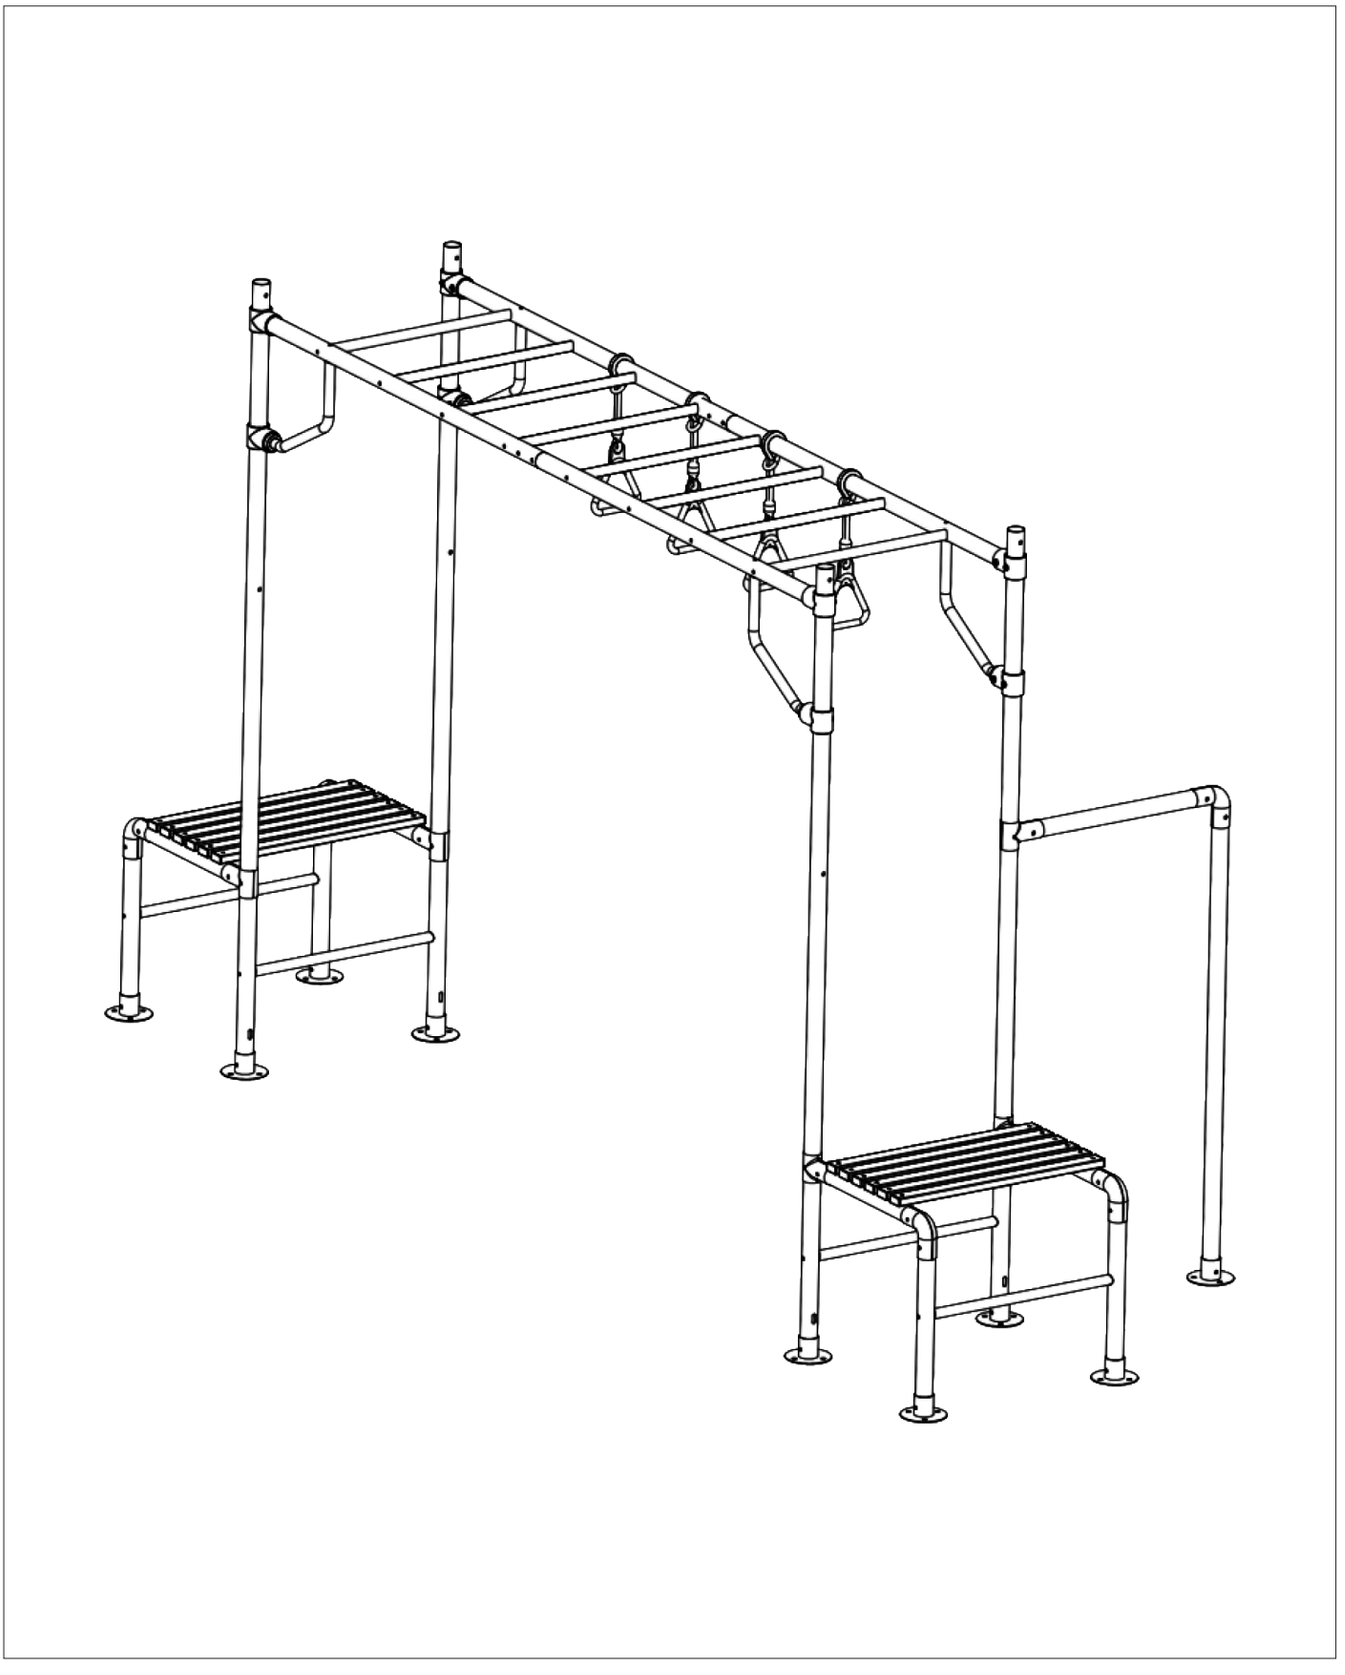


STEP 1

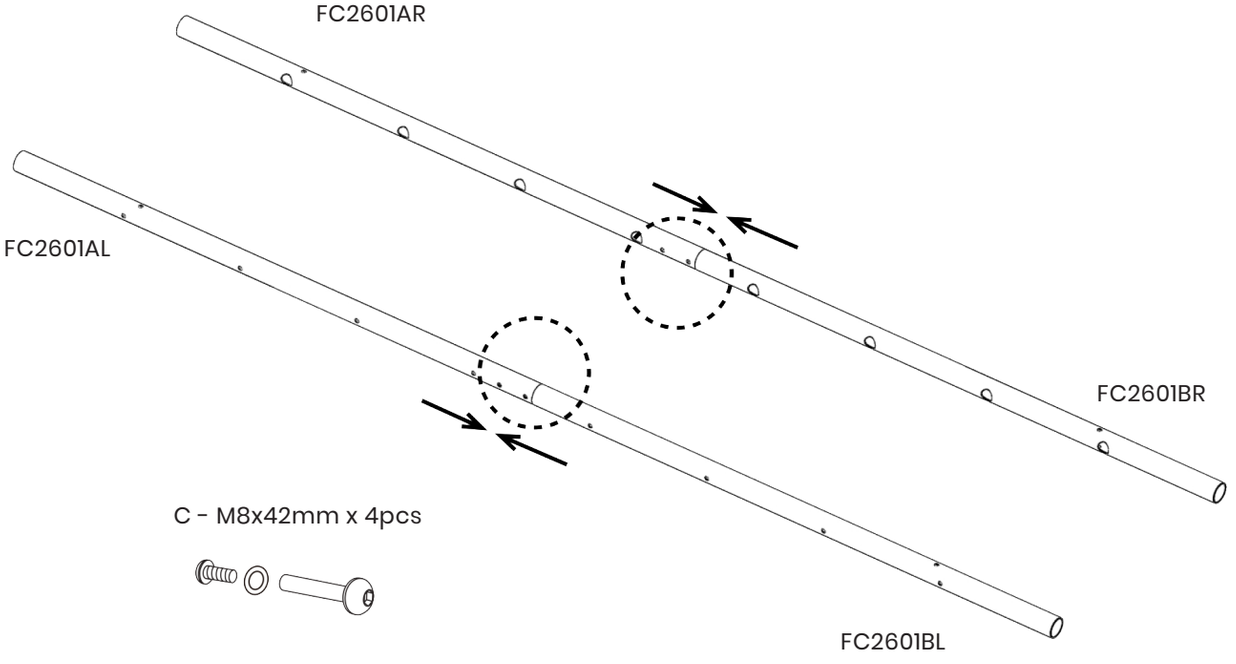

IMPORTANT:
Ensure the spring washer is fitted on the nut side.


STEP 2


IMPORTANT:
1. Ensure the larger access holes on the side rails face inward, toward the rungs, as shown.
2. Do not fully tighten the bolts until all rungs are installed and correctly aligned.

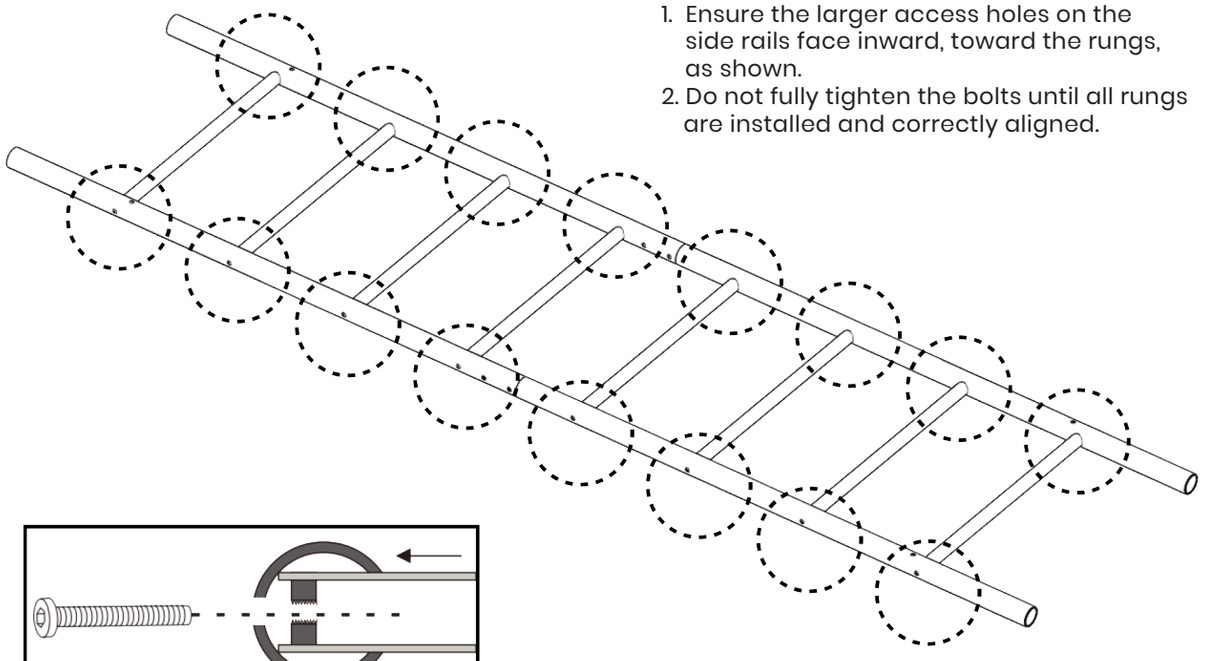


STEP 3

Monkey Bar Height Adjustable

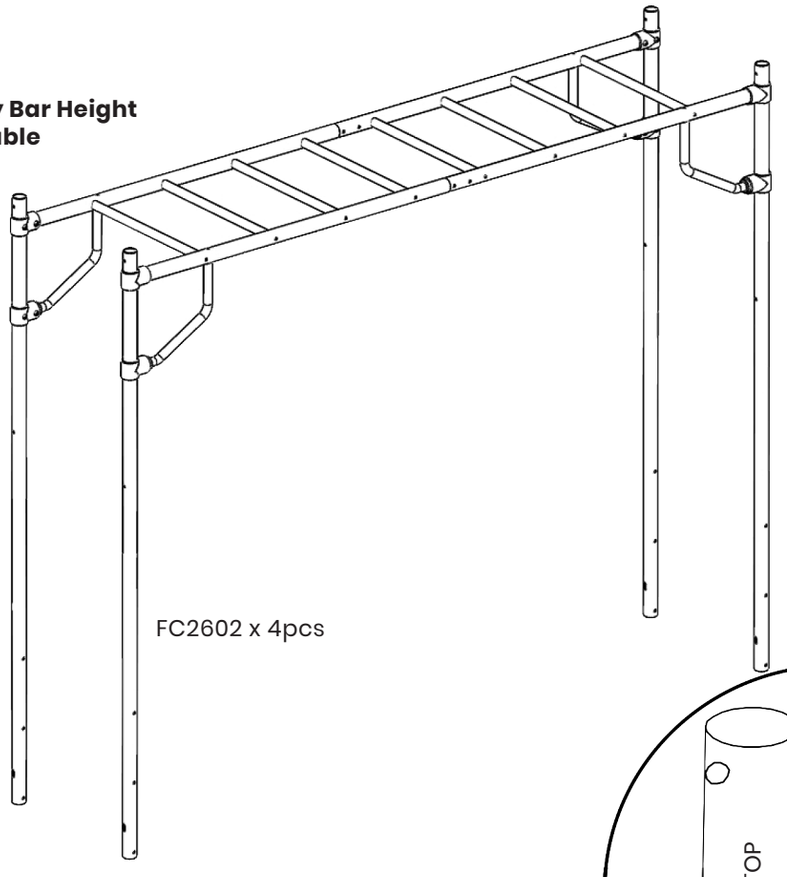

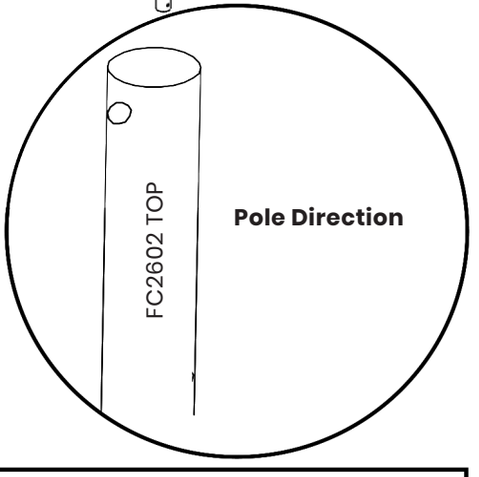

WARNING:
During height adjustment, pay attention to paint scratches caused by locking screws. Such scratches must be repainted to prevent rusting.

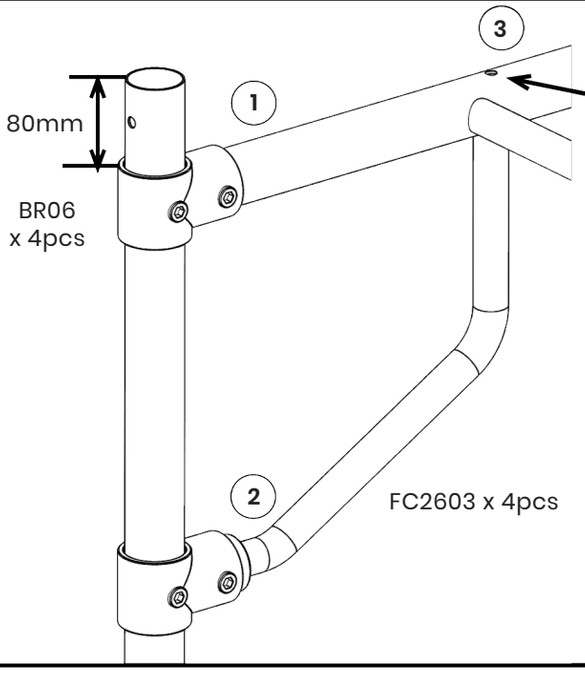





1. Position the components in the numbered order shown in the diagram.
2. Install each BR06 bracket onto the vertical post before connecting the support arm.
3. Secure the upper connections using B–M8x50mm bolts (4pcs).
4. Set the monkey bar to the required height. Maintain approximately 80mm of the FC2602 post above the upper BR06 bracket, as shown.


IMPORTANT: After adjusting the height, securely tighten all BR06 bracket fasteners. Check all four sides are set evenly before continuing.

STEP 4

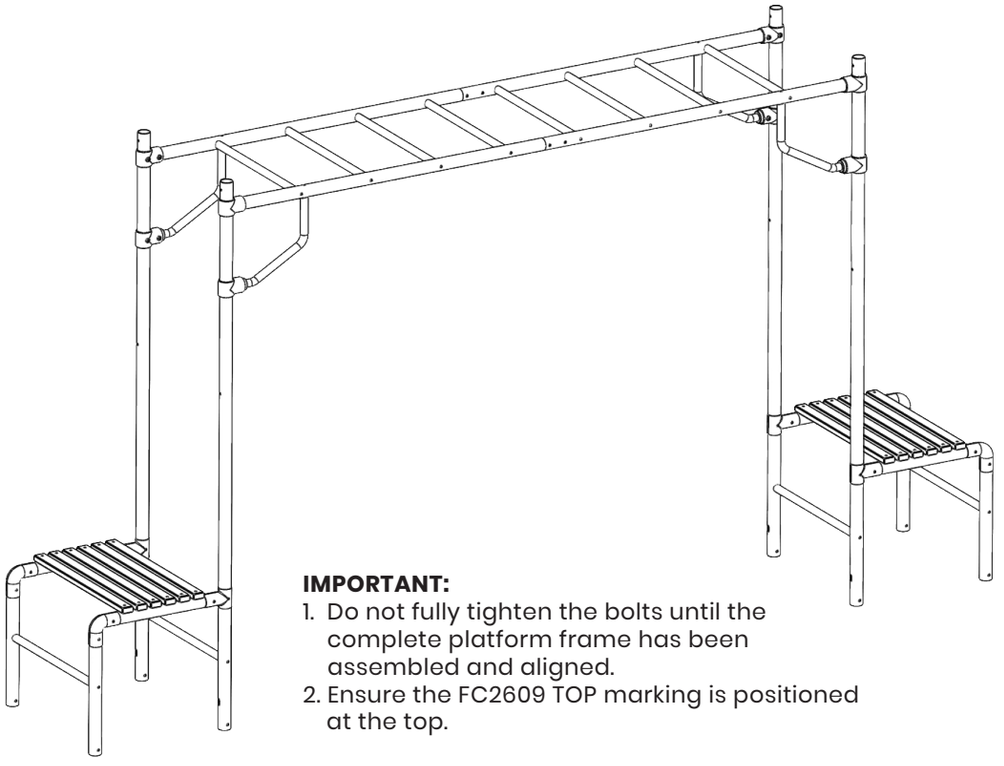

IMPORTANT:
1. Do not fully tighten the bolts until the complete platform frame has been assembled and aligned.
2. Ensure the FC2609 TOP marking is positioned at the top.

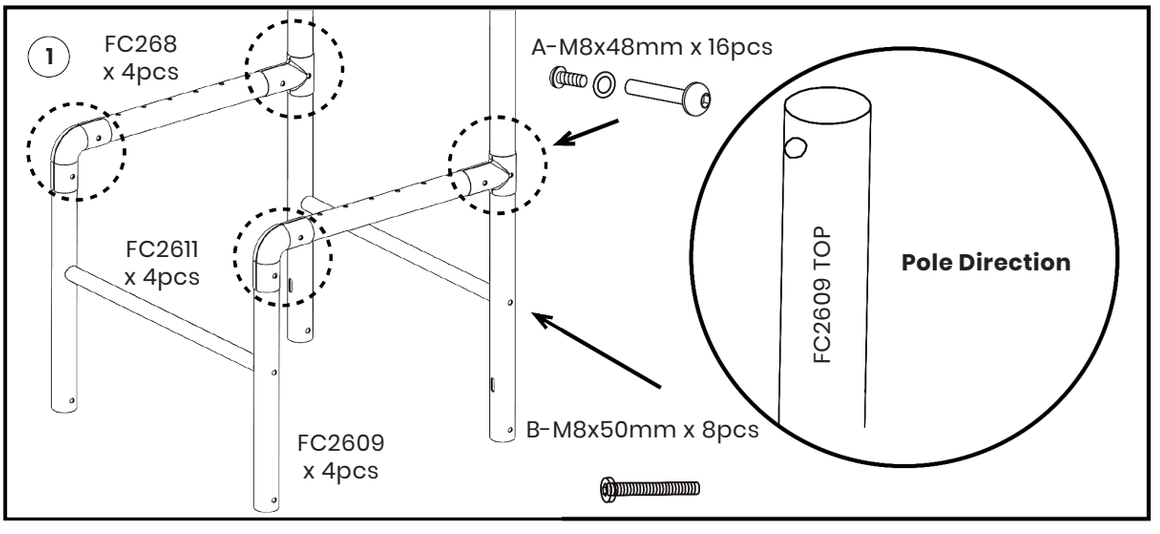


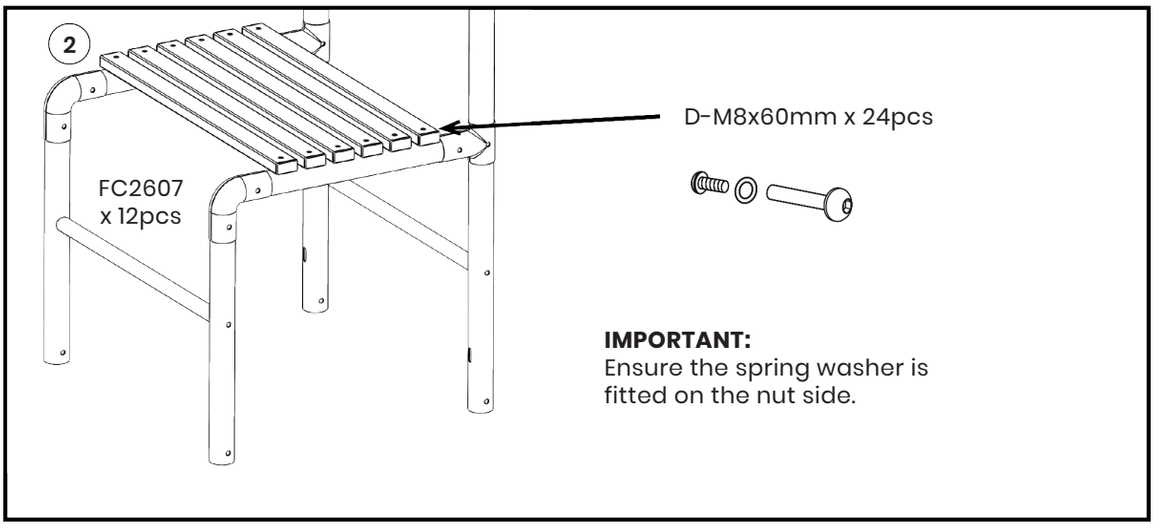

IMPORTANT:
Ensure the spring washer is fitted on the nut side.


STEP 5

NOTE:
If you purchased the combination set including boxes LK377 and LK378, skip this step.

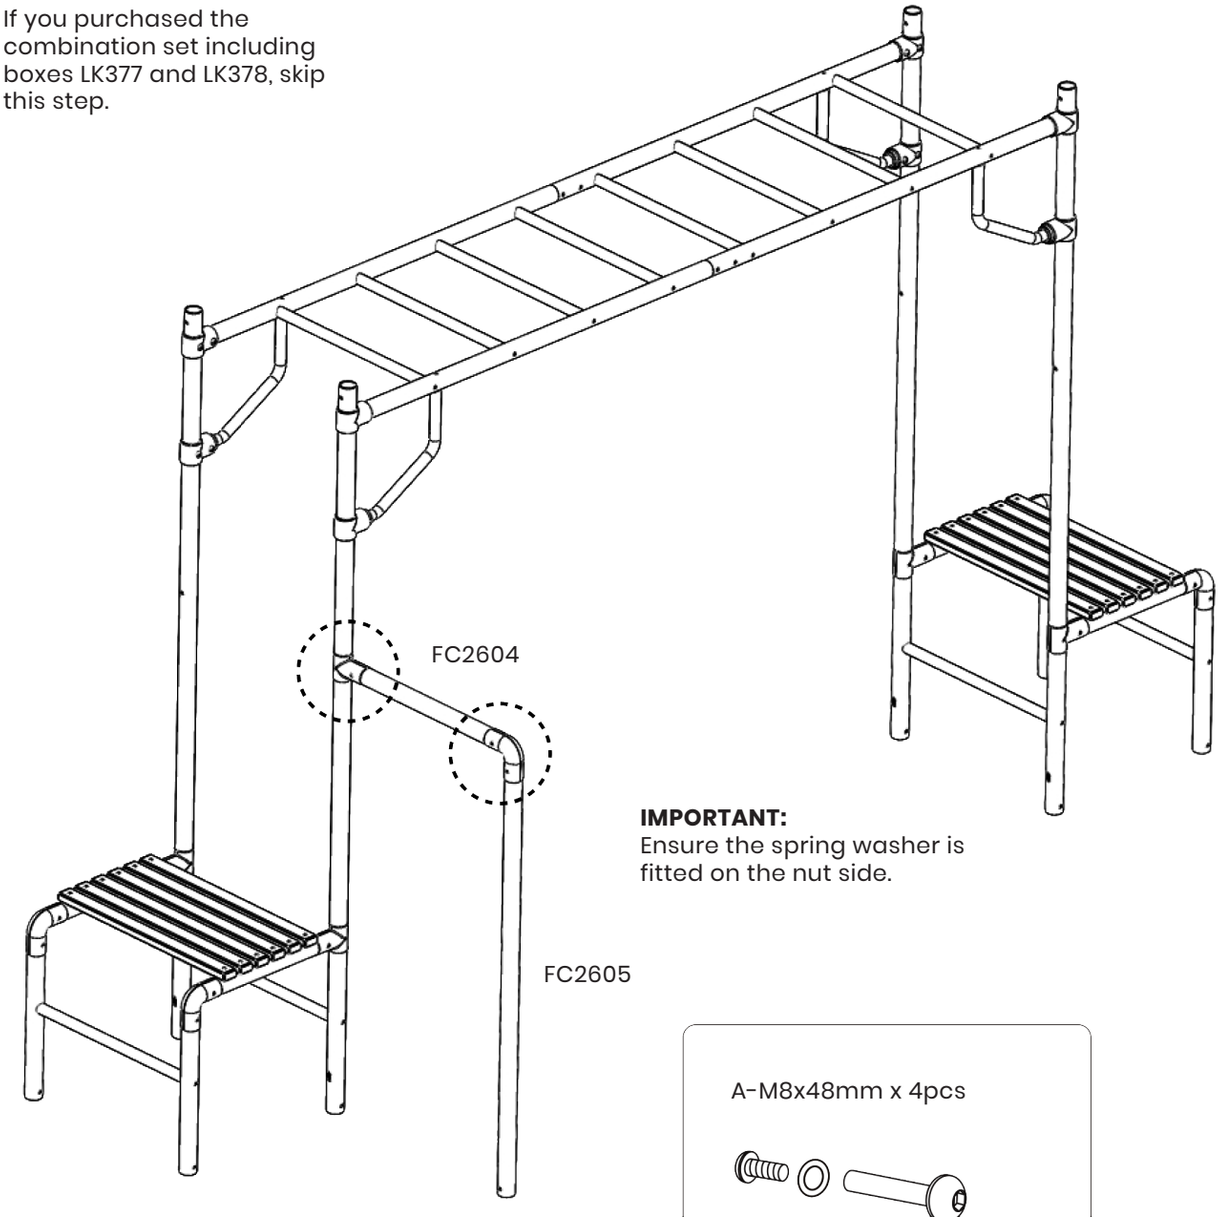


IMPORTANT:
Ensure the spring washer is fitted on the nut side.


A-M8x48mm x 4pcs

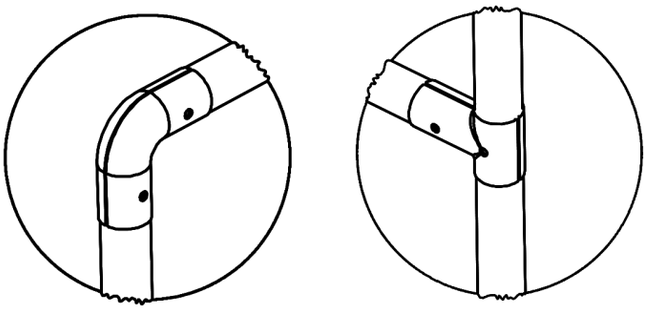


STEP 6

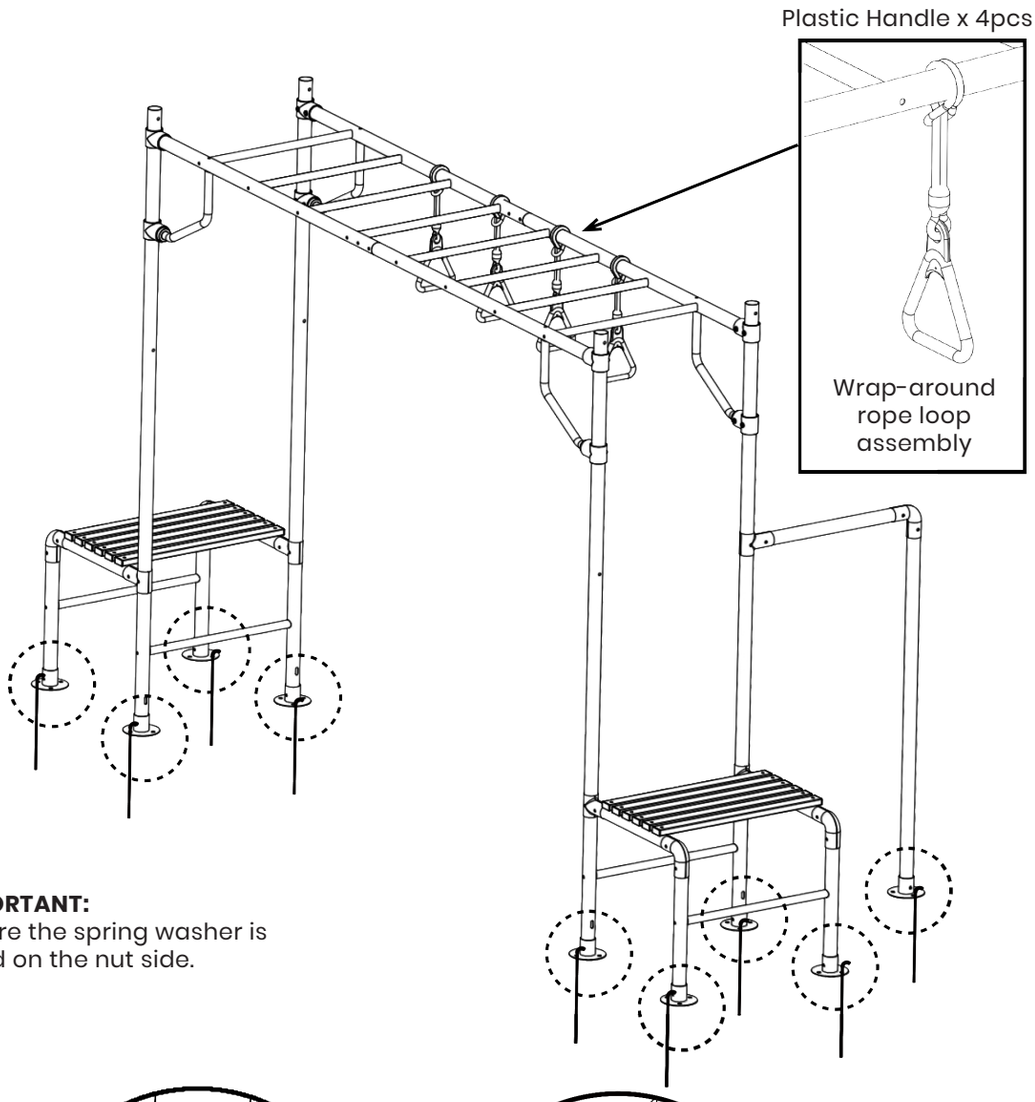

IMPORTANT:
Ensure the spring washer is fitted on the nut side.

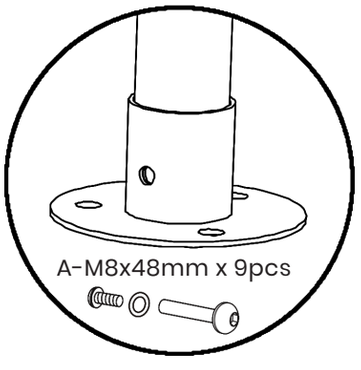

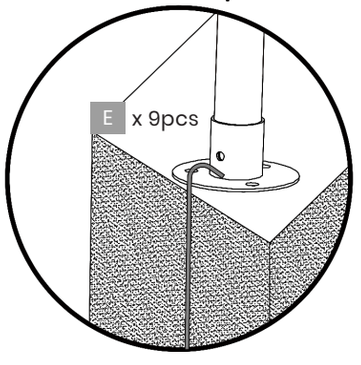


1. Position the climbing gym in its final location and check that the frame is level and stable.
2. Secure the base plates using the ground anchors (E).
3. Ensure all anchors are installed level with or below the ground surface to reduce tripping hazards.
4. Check that the spring washer is fitted on the nut side of each bolted connection.
5. **Fully tighten all bolts and fasteners before use.**


IMPORTANT:
1. The climbing gym must be securely anchored before use.
2. Install on a level surface with suitable impact-absorbing surfacing, such as sand, wood chips, rubber or other appropriate playground surfacing.
3. Do not install over concrete, asphalt or other hard surfaces.
4. Check that all handles, rope loops, anchors, base plates and frame connections are secure before each use.
5. Do not use the equipment if any component is loose, damaged or incorrectly installed.

JUNIOR JUNGLE 2.1 (LK376 + LK377)

This combination uses steps and parts from LK376.
See contents page for LK376 steps.

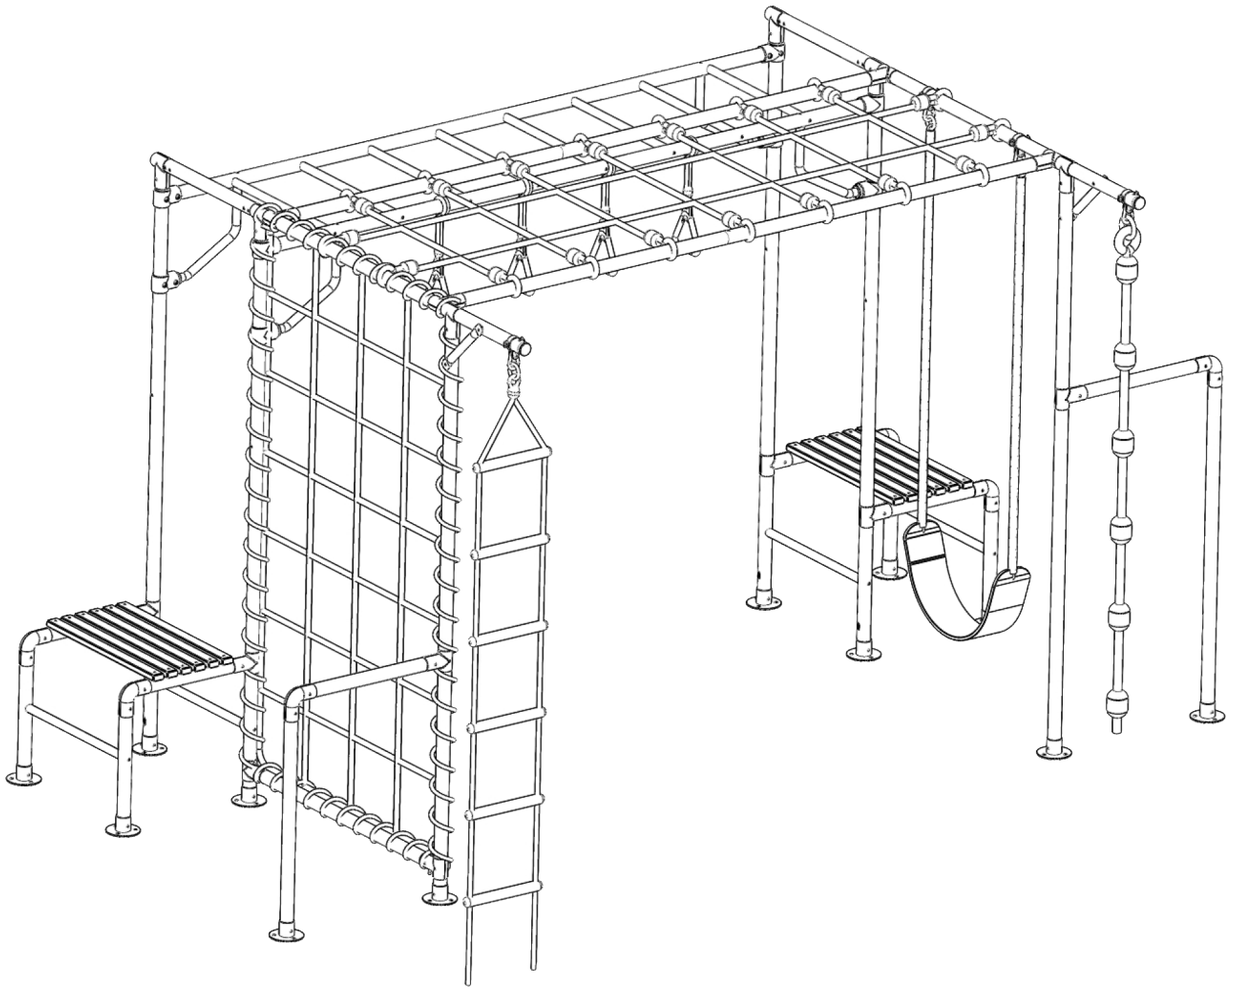


STEP 1

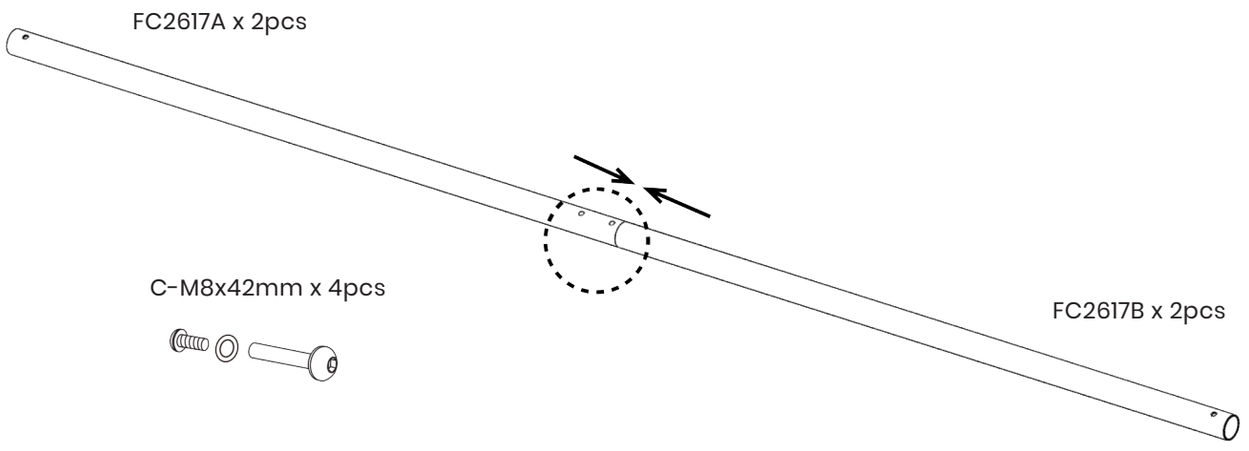

IMPORTANT:
Ensure the spring washer is fitted on the nut side.


STEP 2

IMPORTANT:
FC2610 x 2pcs supplied in Box LK376.

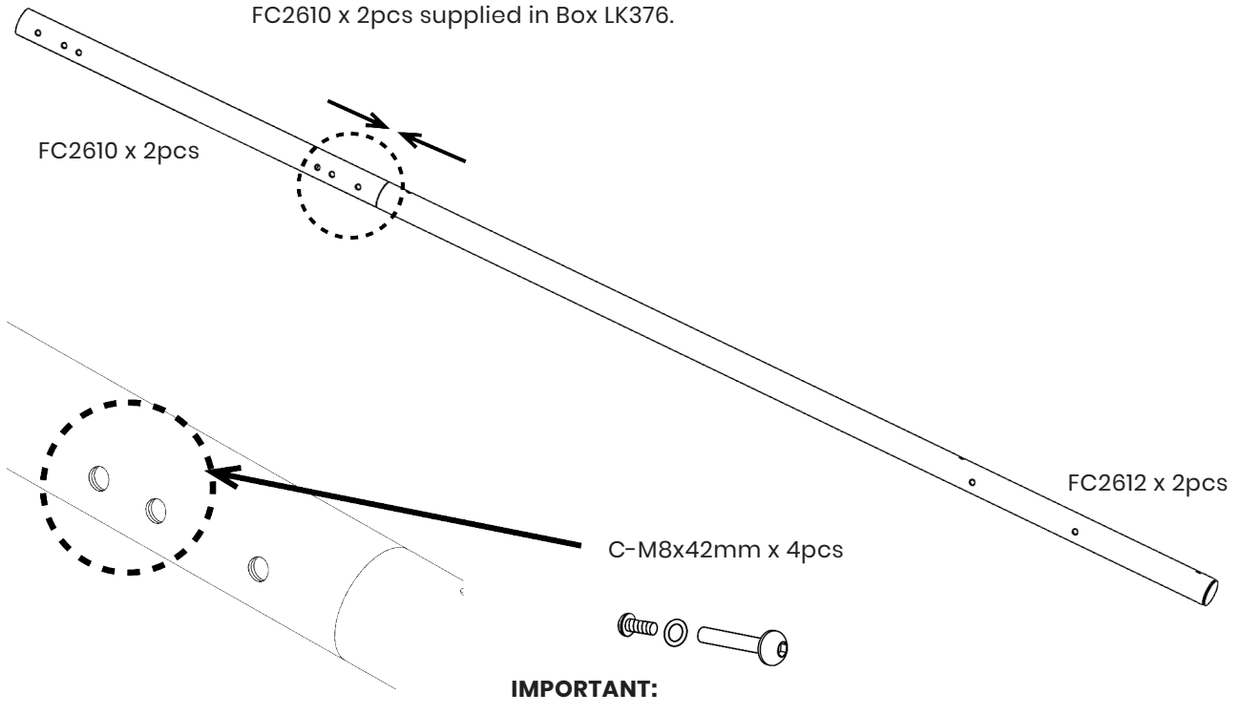


IMPORTANT:
Ensure the spring washer is fitted on the nut side.

STEP 3

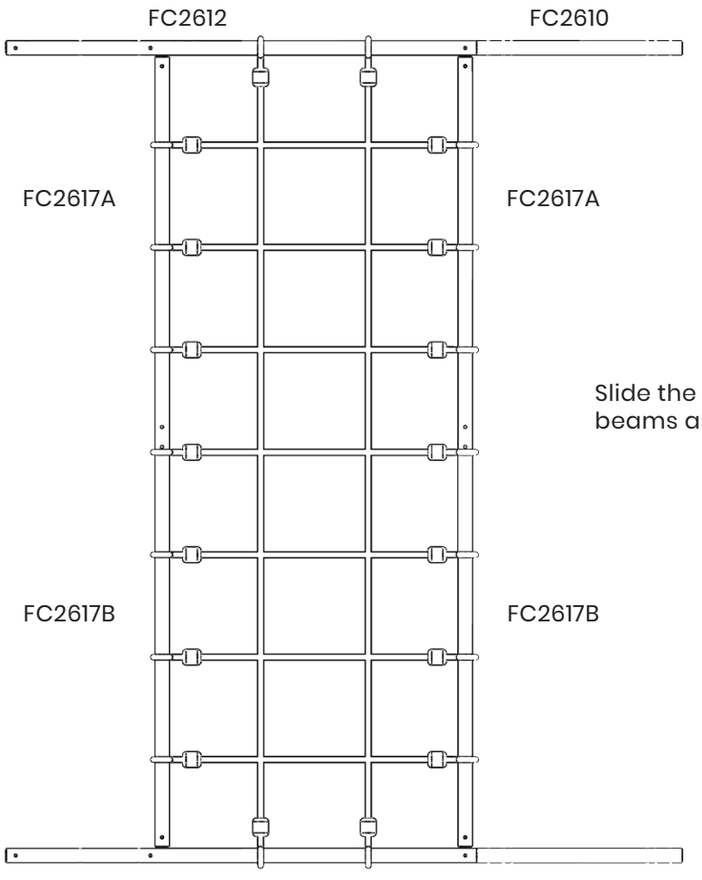


Slide the loops onto the beams as per the layout.

STEP 4

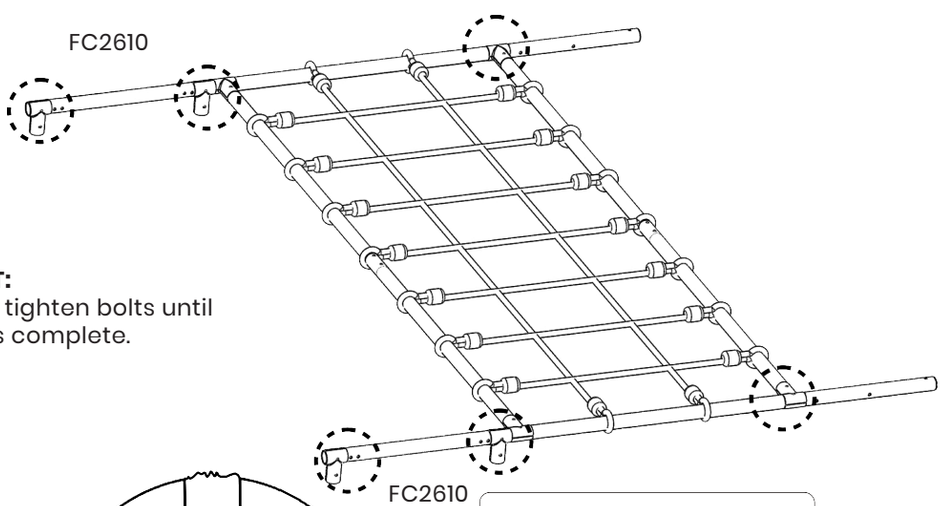


IMPORTANT:
Do not fully tighten bolts until assembly is complete.

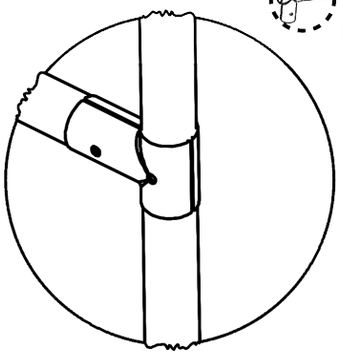

BR02 x 16pcs
(8pcs from box LK376)


A-M8x48mm x 12pcs
(8pcs from box LK376)




IMPORTANT:
Ensure the spring washer is fitted on the nut side.

STEP 5


Refer to LK376 pages for the monkey bar installation.

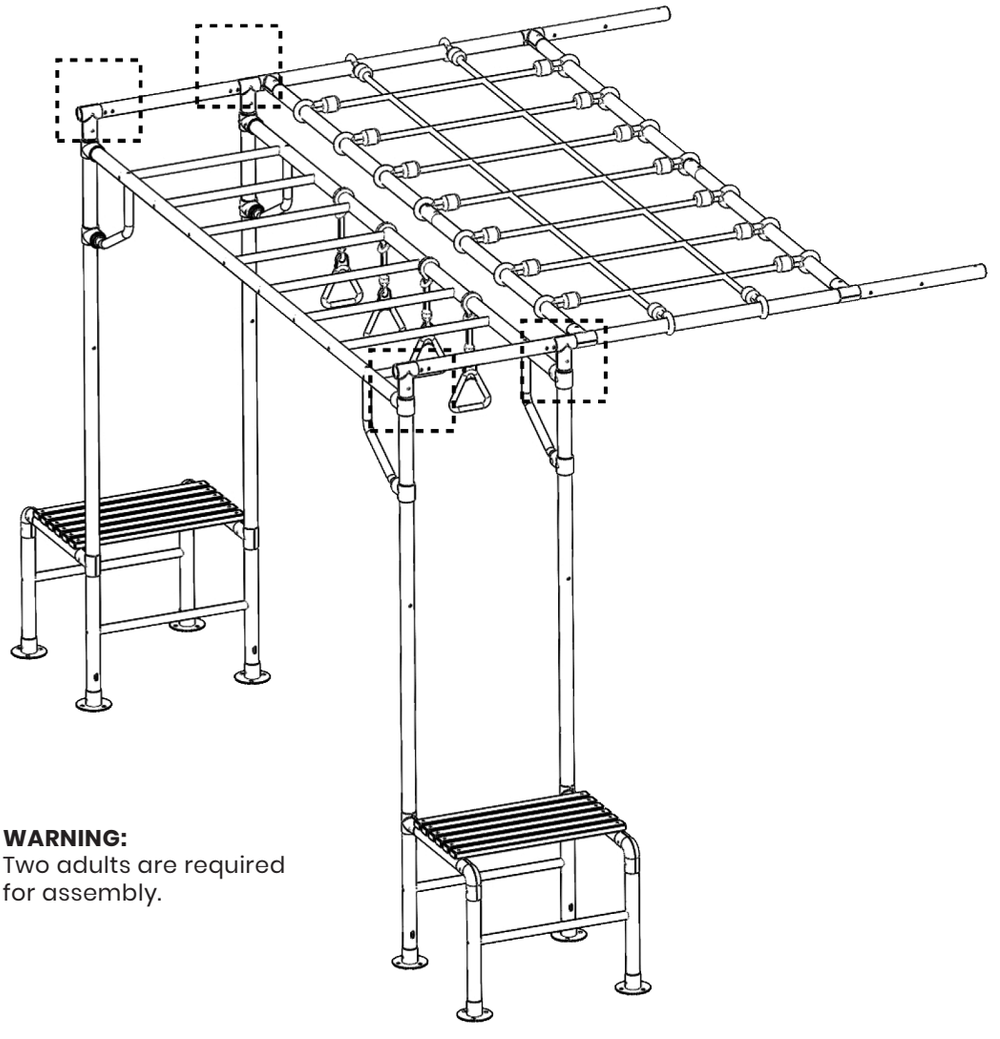

WARNING:
Two adults are required for assembly.

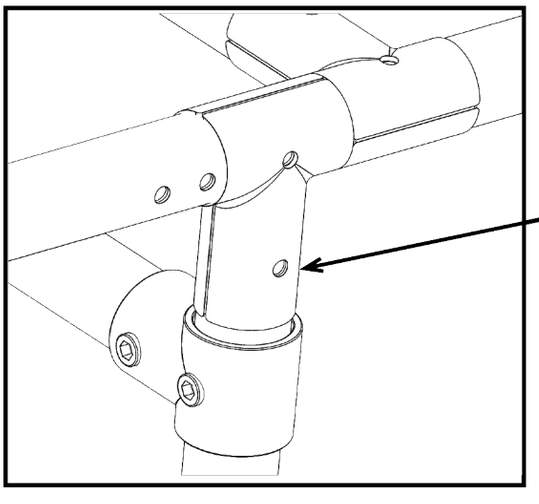



A-M8x48mm x 4pcs




IMPORTANT:
Ensure the spring washer is fitted on the nut side.

STEP 6

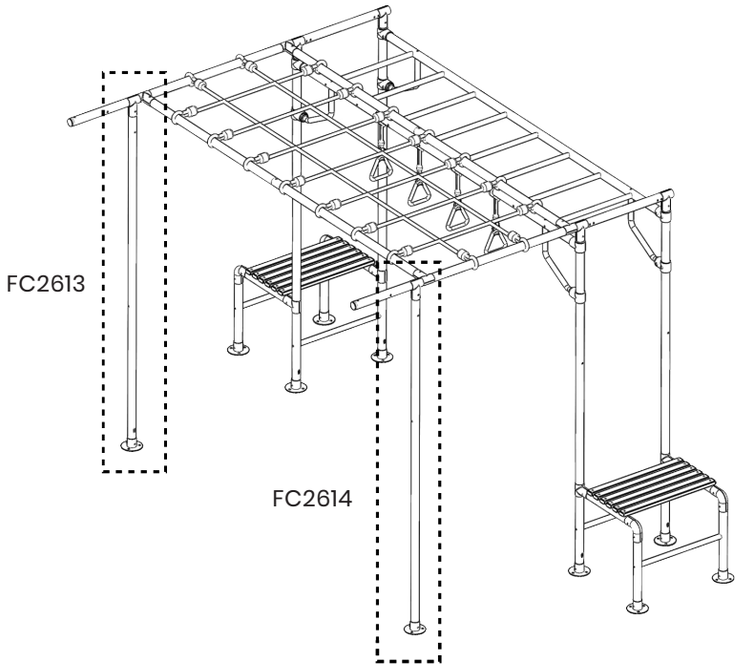


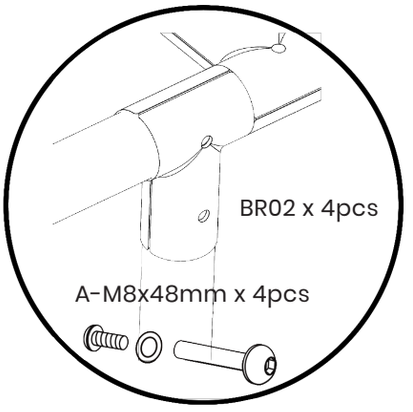


IMPORTANT:
Ensure the spring washer is fitted on the nut side.

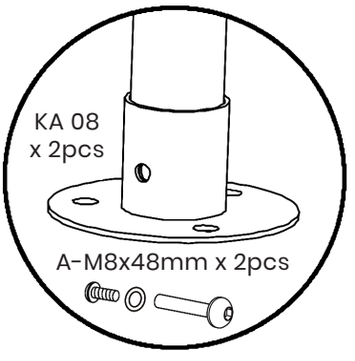


STEP 7

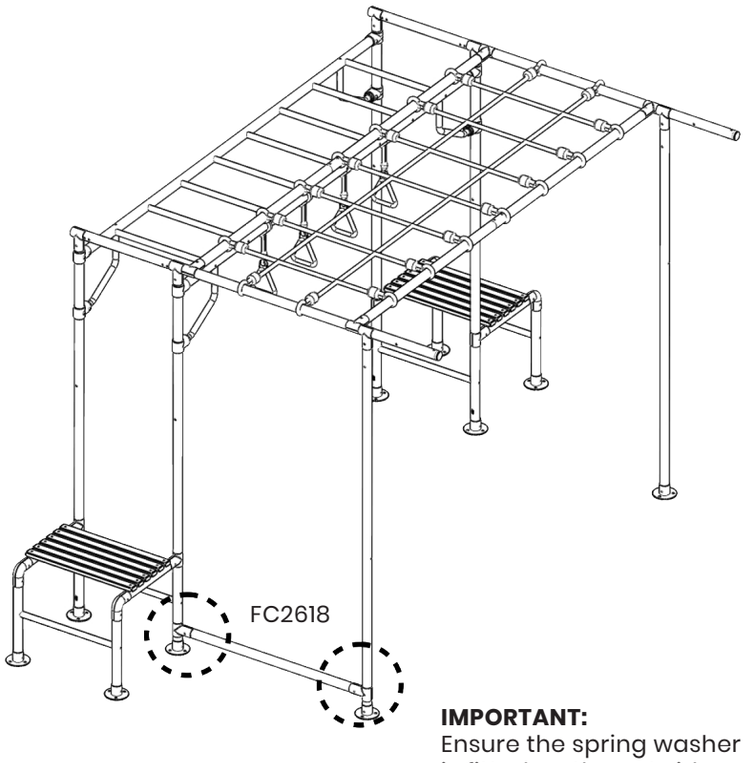

IMPORTANT:
Ensure the spring washer is fitted on the nut side.

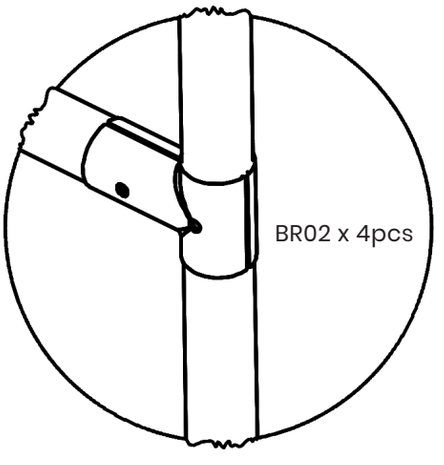


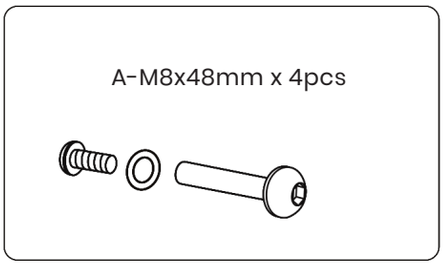

STEP 8


- Net X 1
- Rope X 1
- Zip Tie X 6 - For assembly assistance only, remove after fully installed.

WARNING:
Adult supervision is required during use.

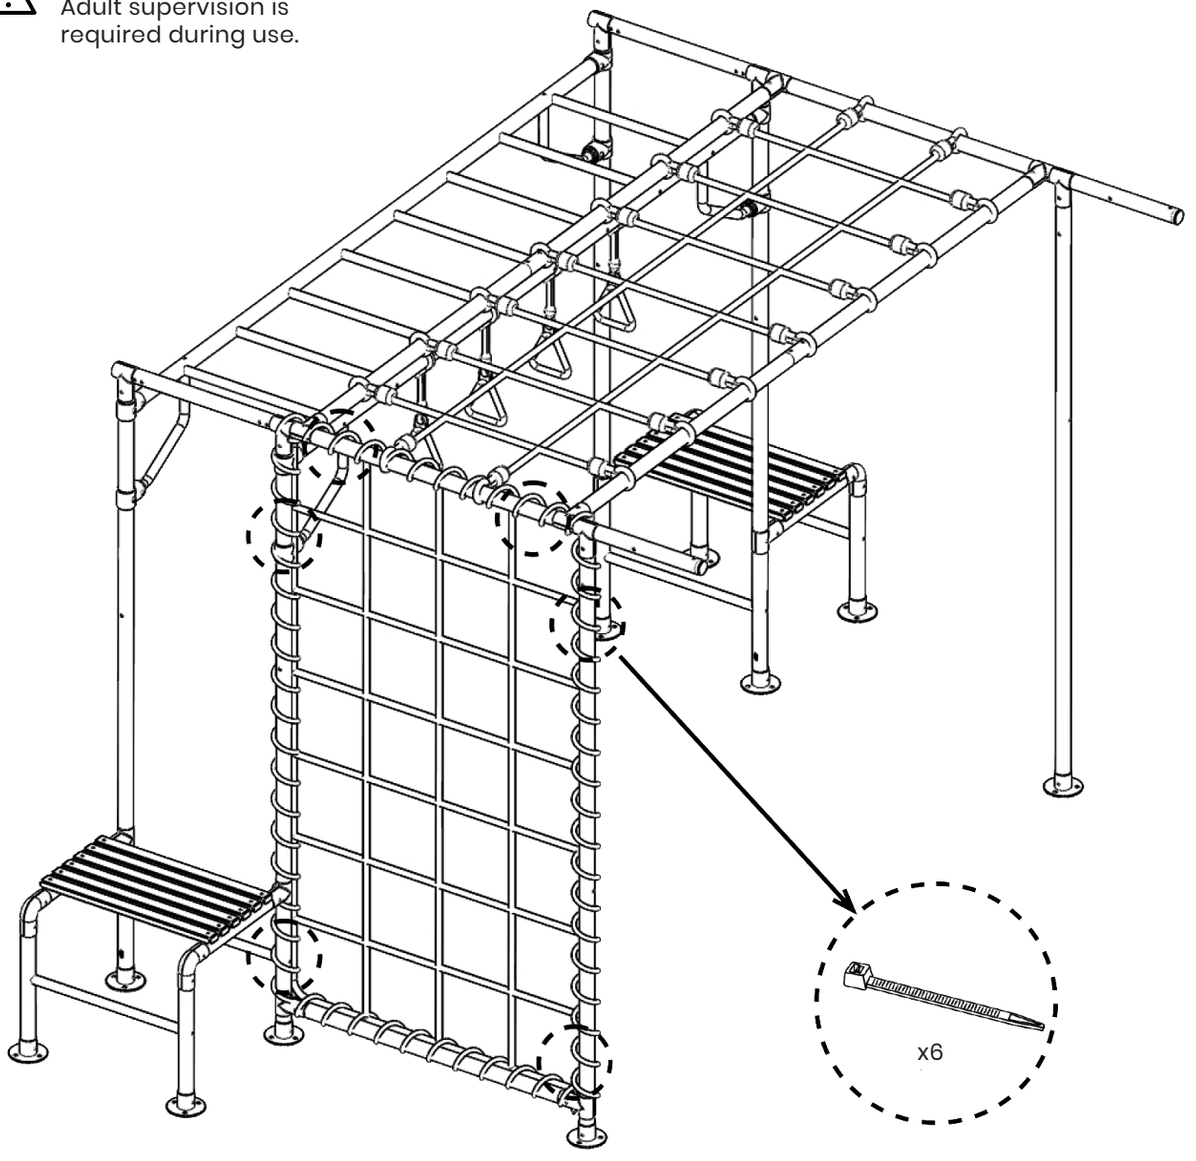



1. Position the net as shown and use the zip ties to hold it in place.
2. Starting at one corner, wrap the rope through the net and around the post. Secure with a double knot.
3. Continue lacing around the frame and finish with a double knot.
4. Remove all zip ties after installation.


STEP 9

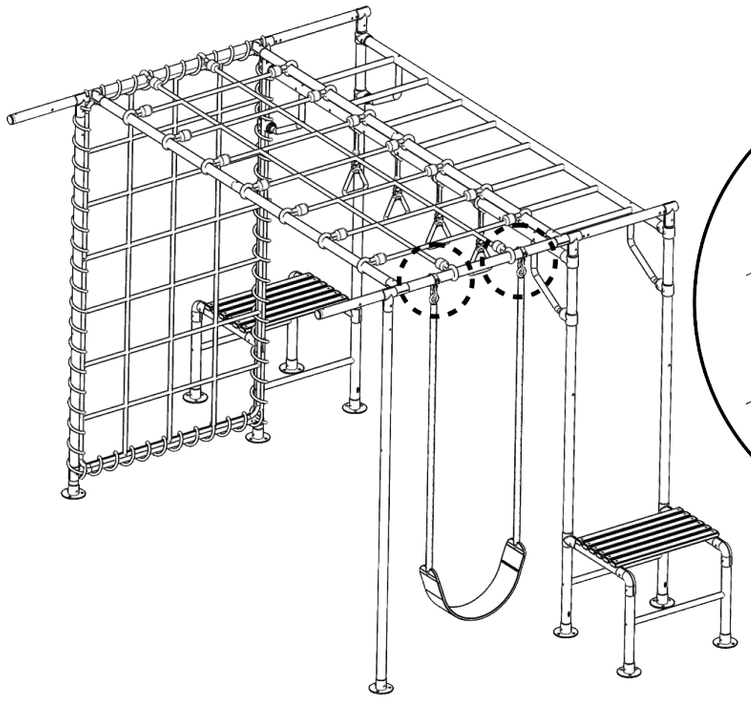

Hang up Swing seat

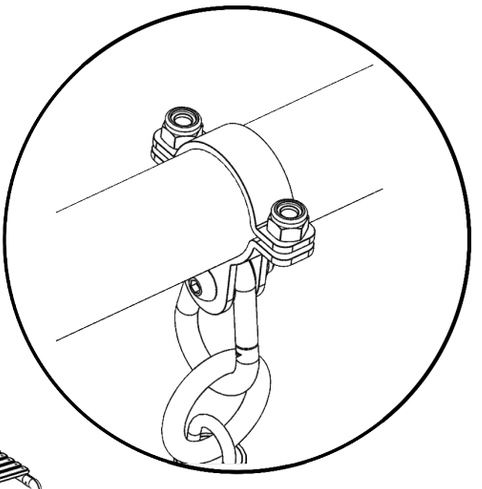

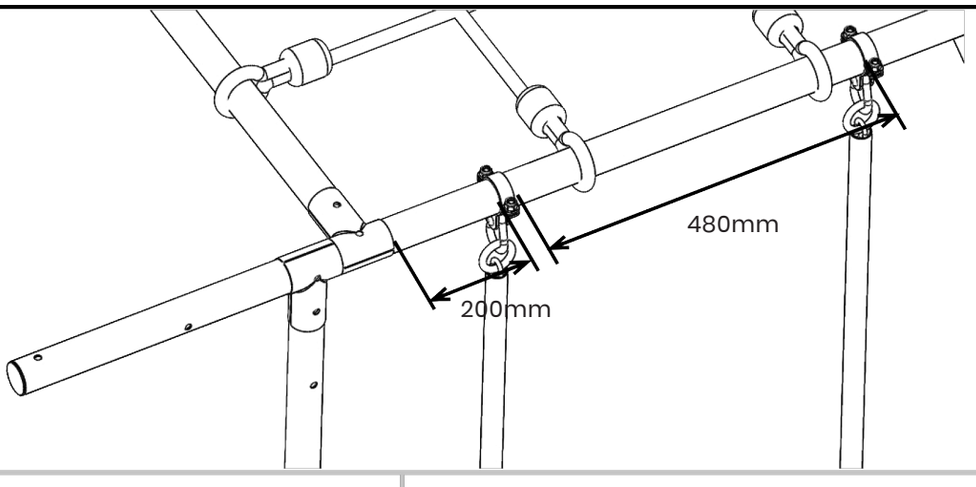

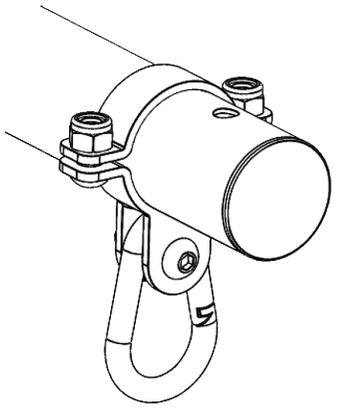


Position the hanging brackets at the distances shown. Ensure each spring hook hangs vertically before fully tightening the bolts.



G-M8x15mm x 4pcs

STEP 10

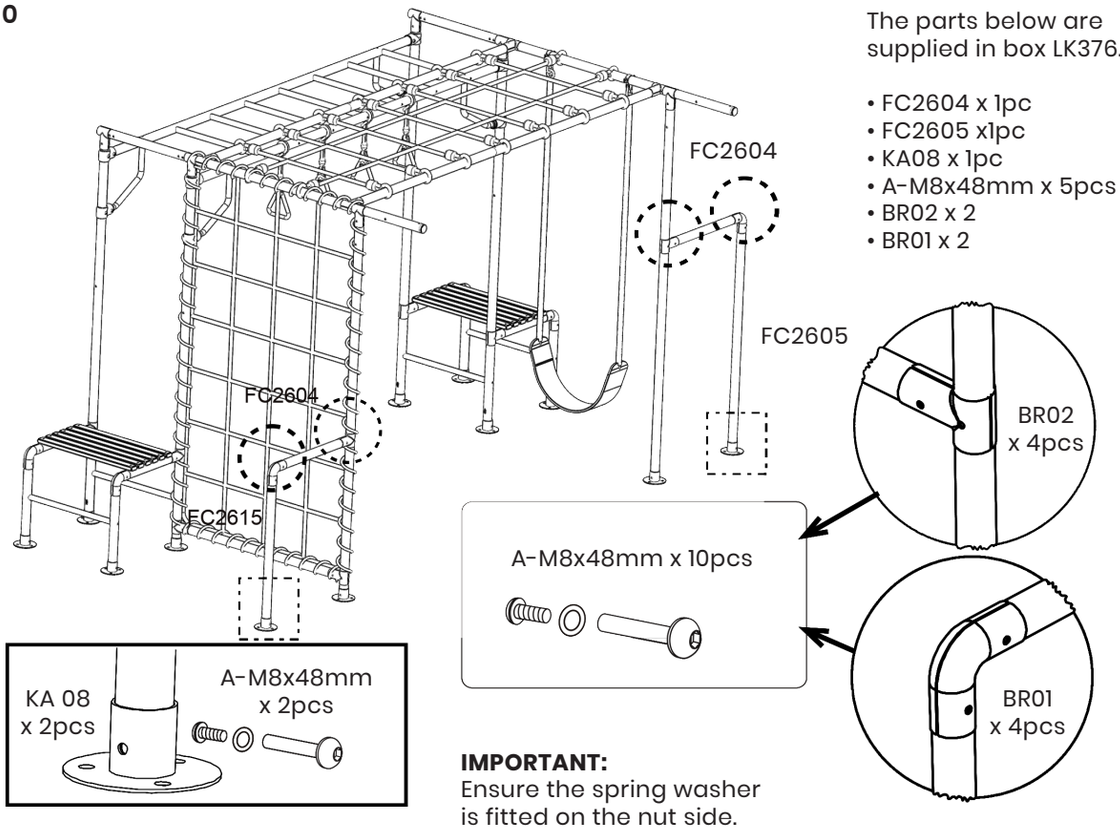


The parts below are supplied in box LK376.

- FC2604 x 1pc
- FC2605 x1pc
- KA08 x 1pc
- A-M8x48mm x 5pcs
- BR02 x 2
- BR01 x 2


IMPORTANT:
Ensure the spring washer is fitted on the nut side.

STEP 11

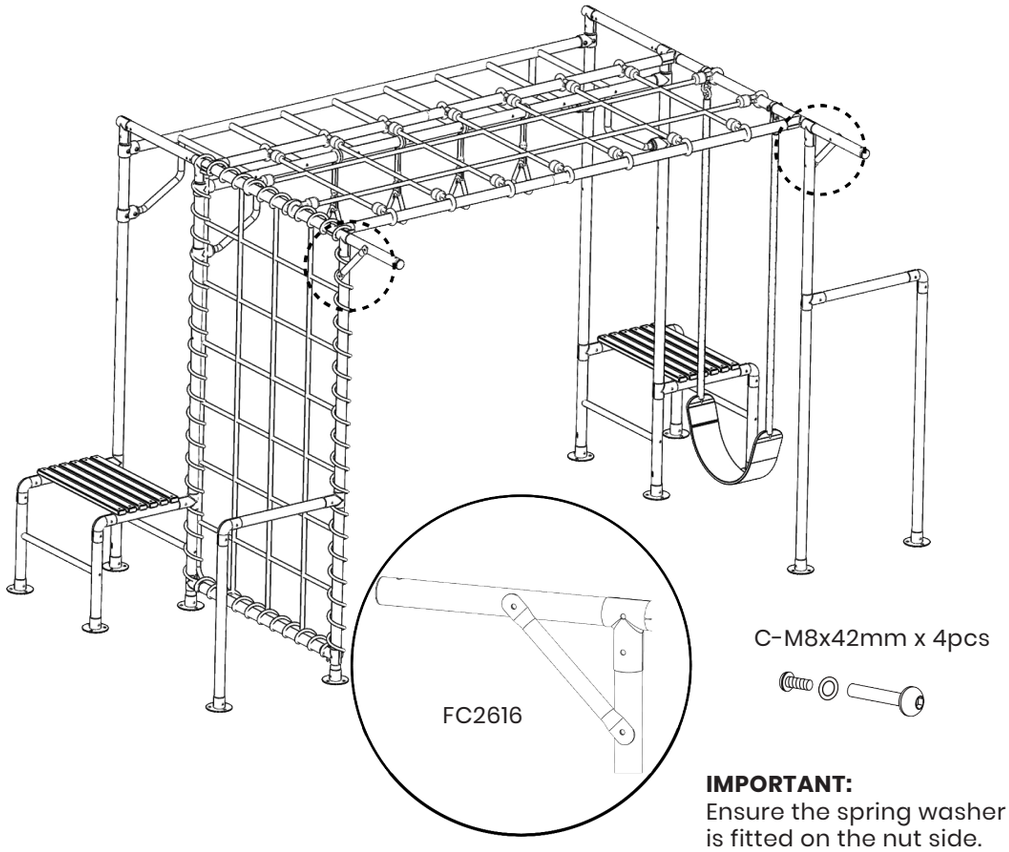



IMPORTANT:
Ensure the spring washer is fitted on the nut side.

STEP 12

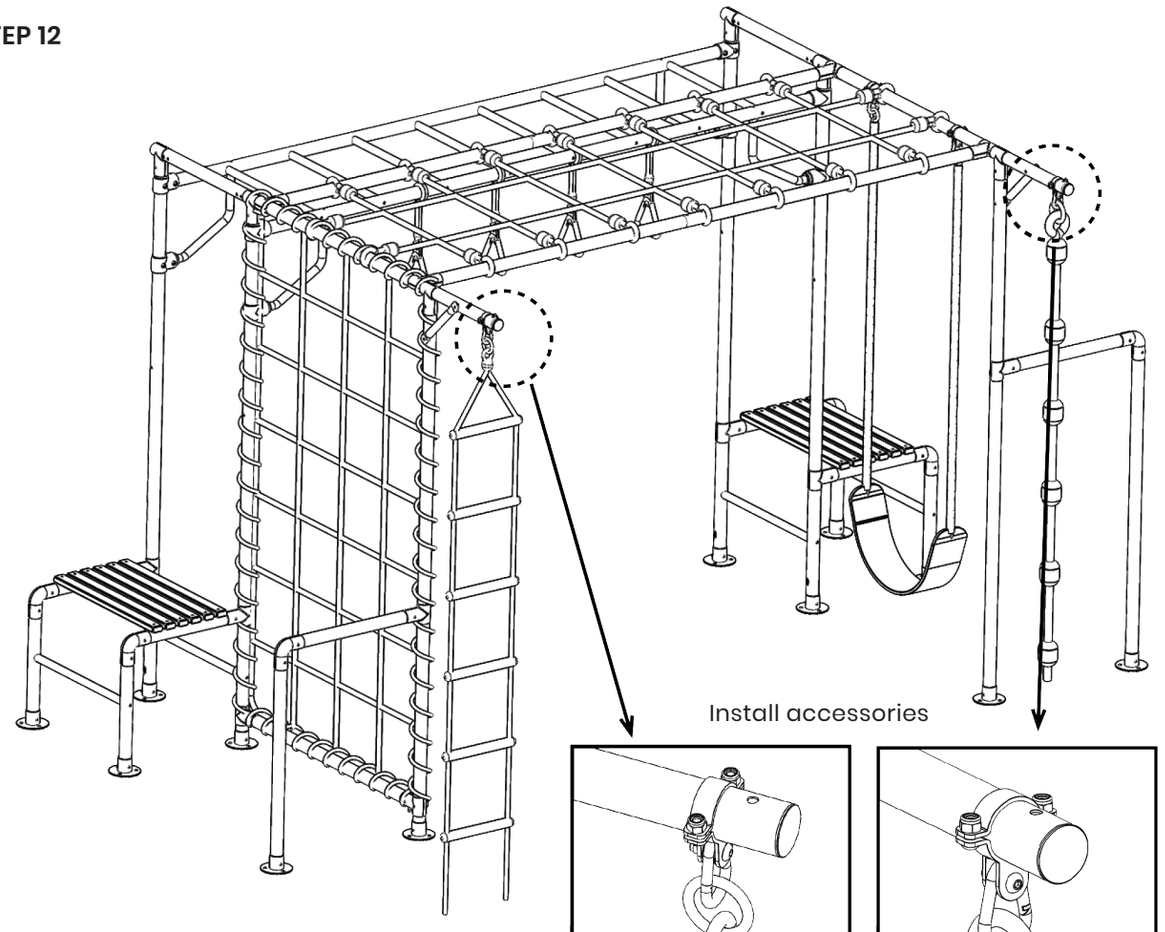


Install accessories

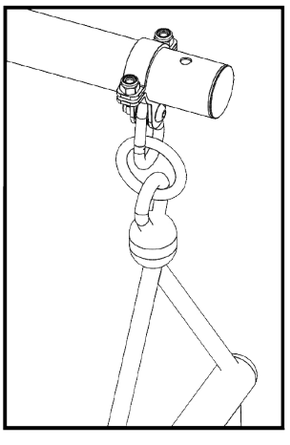

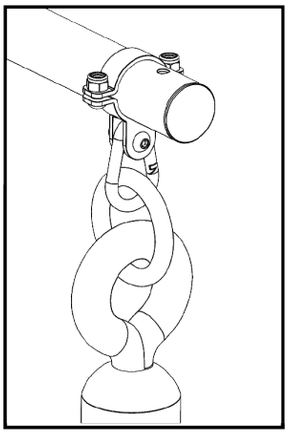

Hanging Bracket Assembly

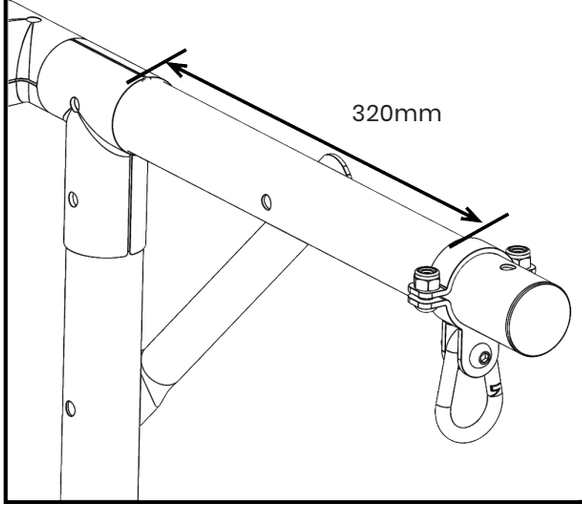



Position the hanging brackets at the distances shown. Ensure each spring hook hangs vertically before fully tightening the bolts.



G-M8x15mm x 4pcs

STEP 13

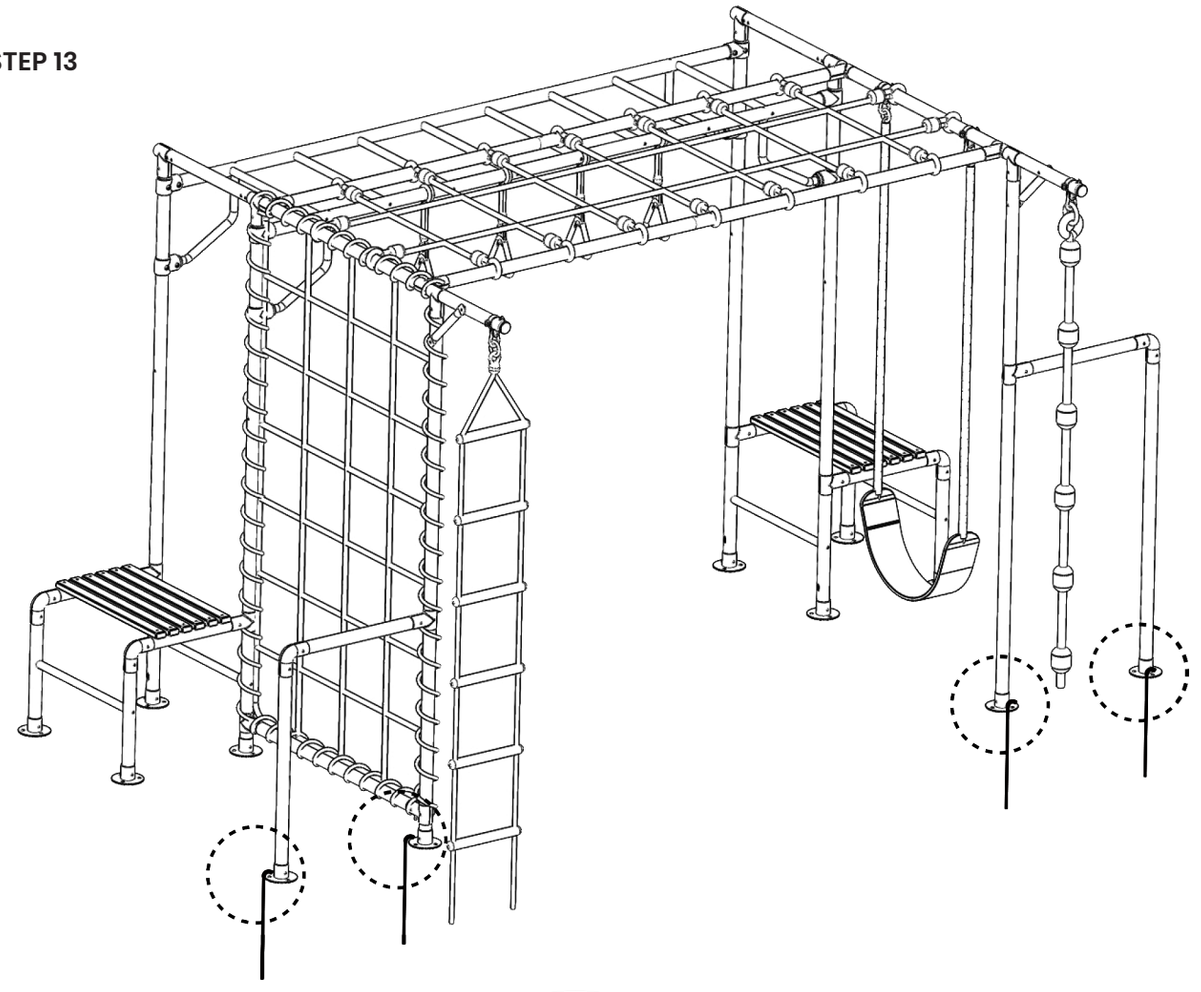

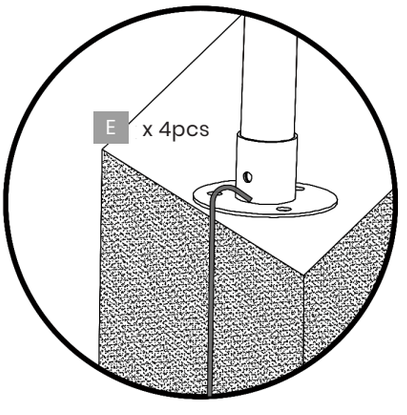

1 of the anchor supplied in box LK376.


1. Position the climbing gym in its final location and check that the frame is level and stable.
2. Secure the base plates using the ground anchors (E).
3. Ensure all anchors are installed level with or below the ground surface to reduce tripping hazards.
4. Check that the spring washer is fitted on the nut side of each bolted connection.
5. **Fully tighten all bolts and fasteners before use.**

IMPORTANT:

1. The climbing gym must be securely anchored before use.
2. Install on a level surface with suitable impact-absorbing surfacing, such as sand, wood chips, rubber or other appropriate playground surfacing.
3. Do not install over concrete, asphalt or other hard surfaces.
4. Check that all handles, rope loops, anchors, base plates and frame connections are secure before each use.
5. Do not use the equipment if any component is loose, damaged or incorrectly installed.


JUNIOR JUNGLE 2.3 (LK376, LK377, LK378 & LK379)

This combination uses steps and parts from LK376 and LK377.
See contents page for LK376 and LK377 steps.

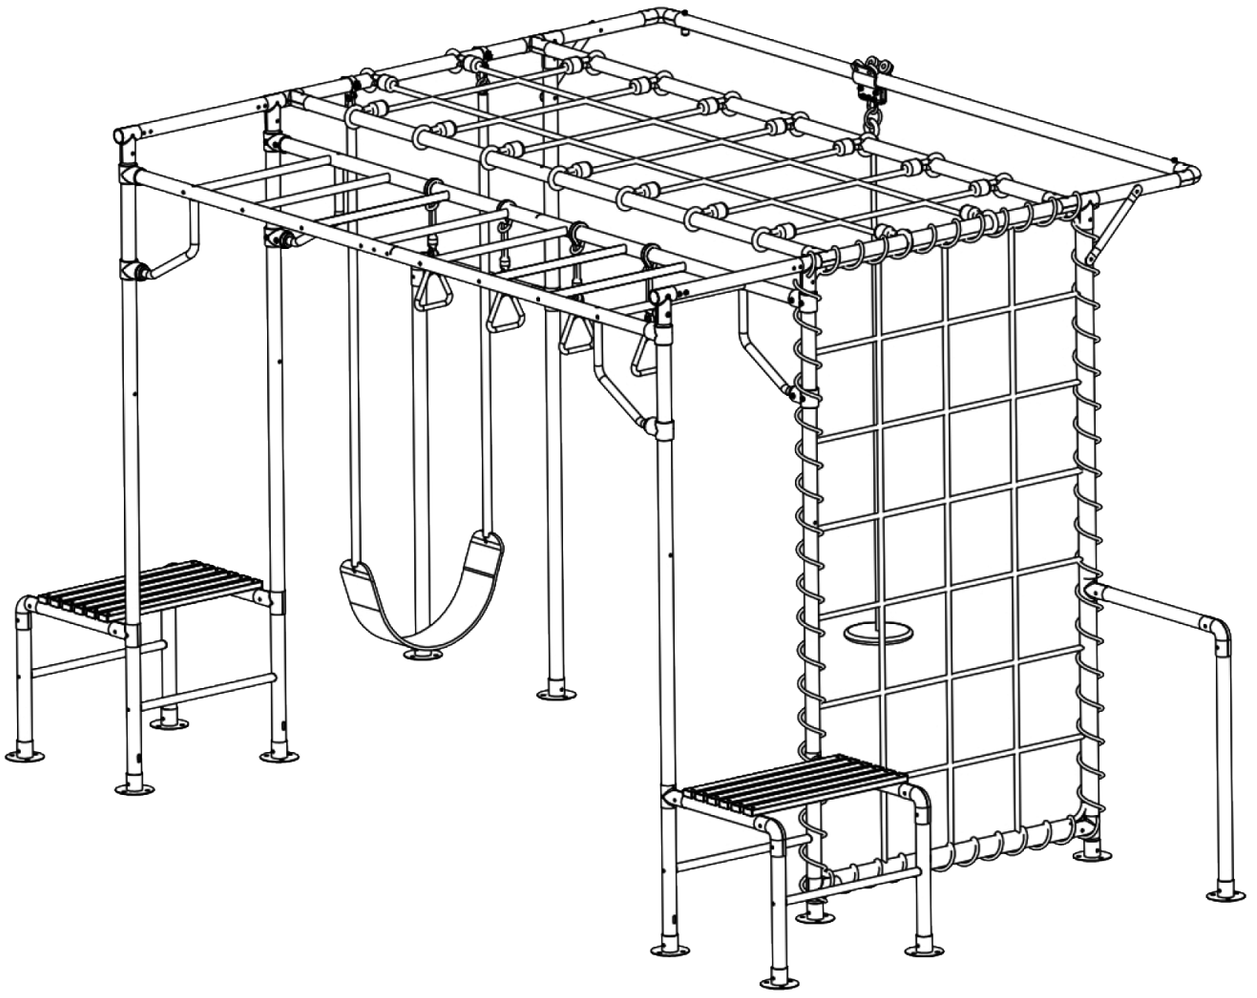


STEP 1

1. Slide the flying fox wheel set onto FC2619.
2. Install one stopper at each end and tighten securely.

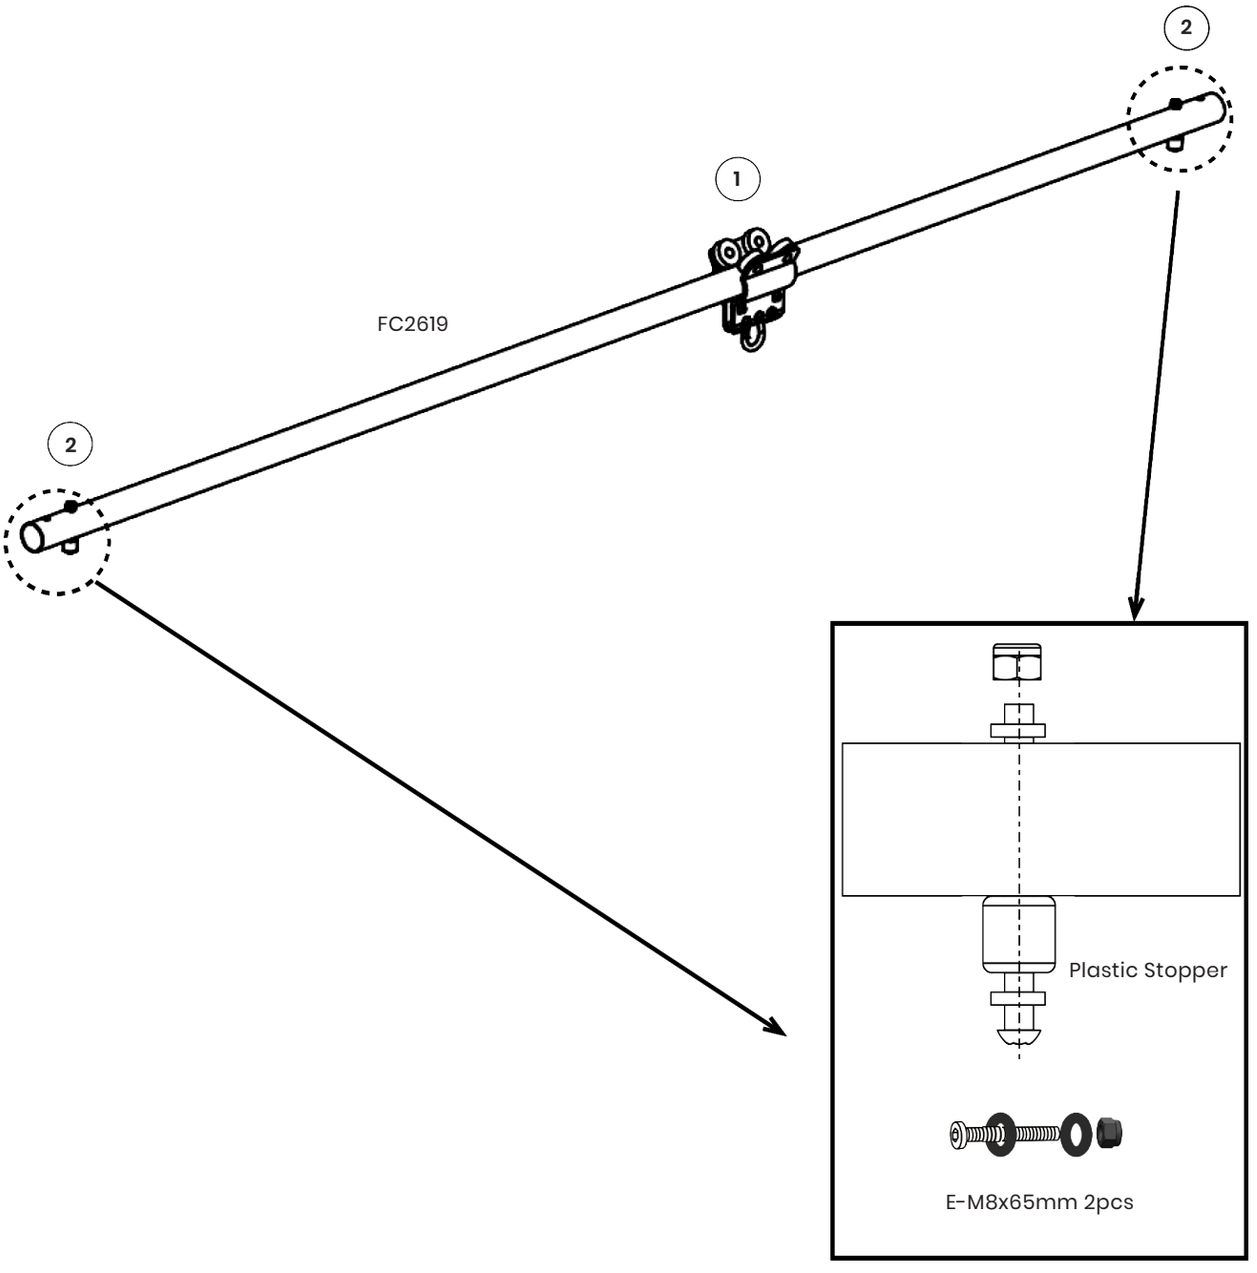


STEP 2

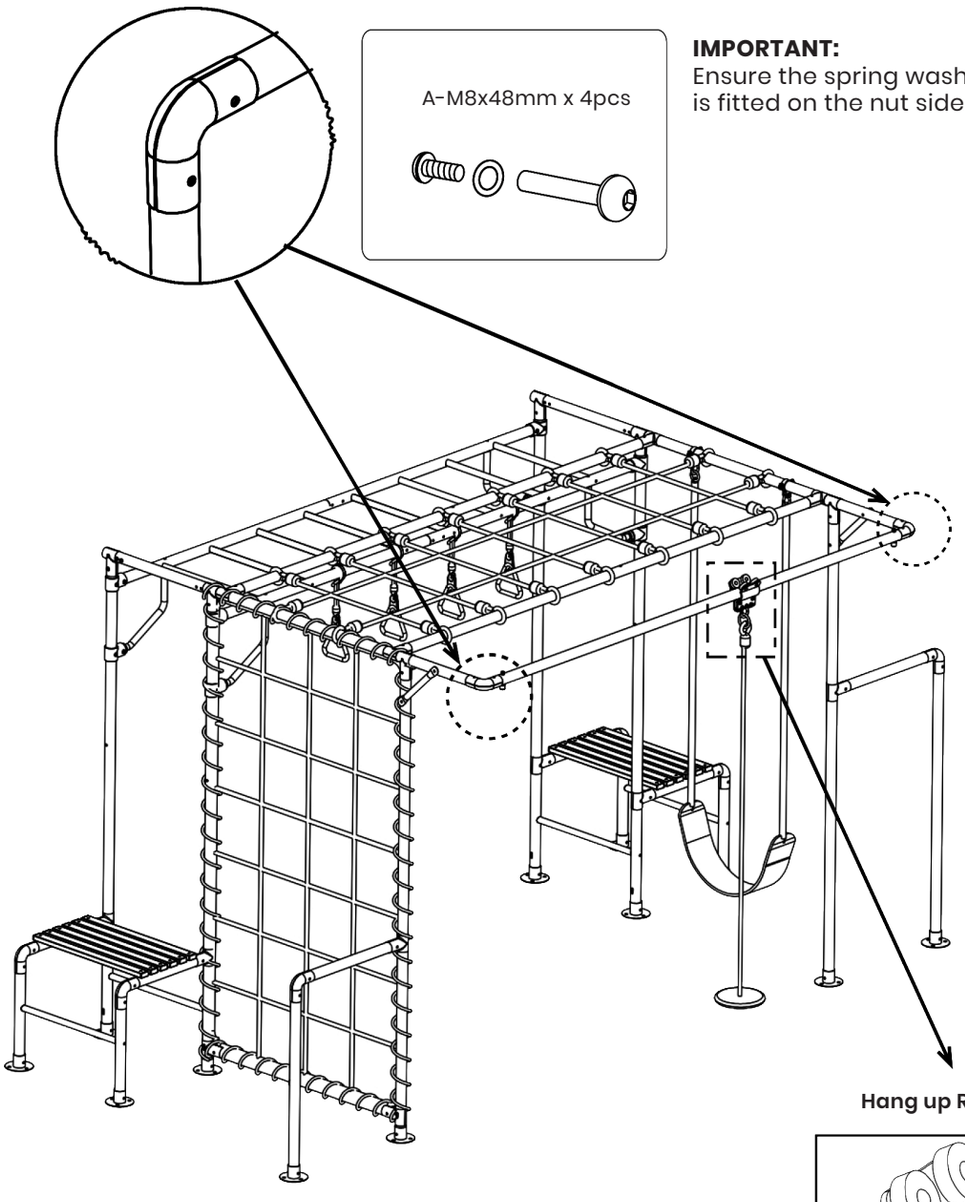

IMPORTANT:
Ensure the spring washer is fitted on the nut side.

Hang up Rope Disc

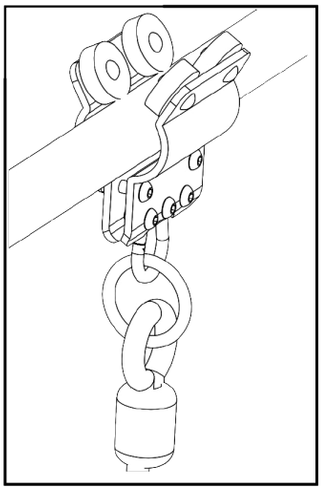


Refer to the pages for LK376 and LK377 first before connecting the flying fox piece.

TIP:
Check the wheel set moves freely and both stoppers are secure before attaching the rope disc.


WARNING:
- Check all parts are securely tightened before use.
- Apply silicon oil to the rollers of the flying fox for smoother motion where necessary.
- Check roller for wear and replace when necessary.

JUNIOR JUNGLE 2.0 (LK376 + LK380)

This combination uses steps and parts from LK376.
See contents page for LK376 steps.

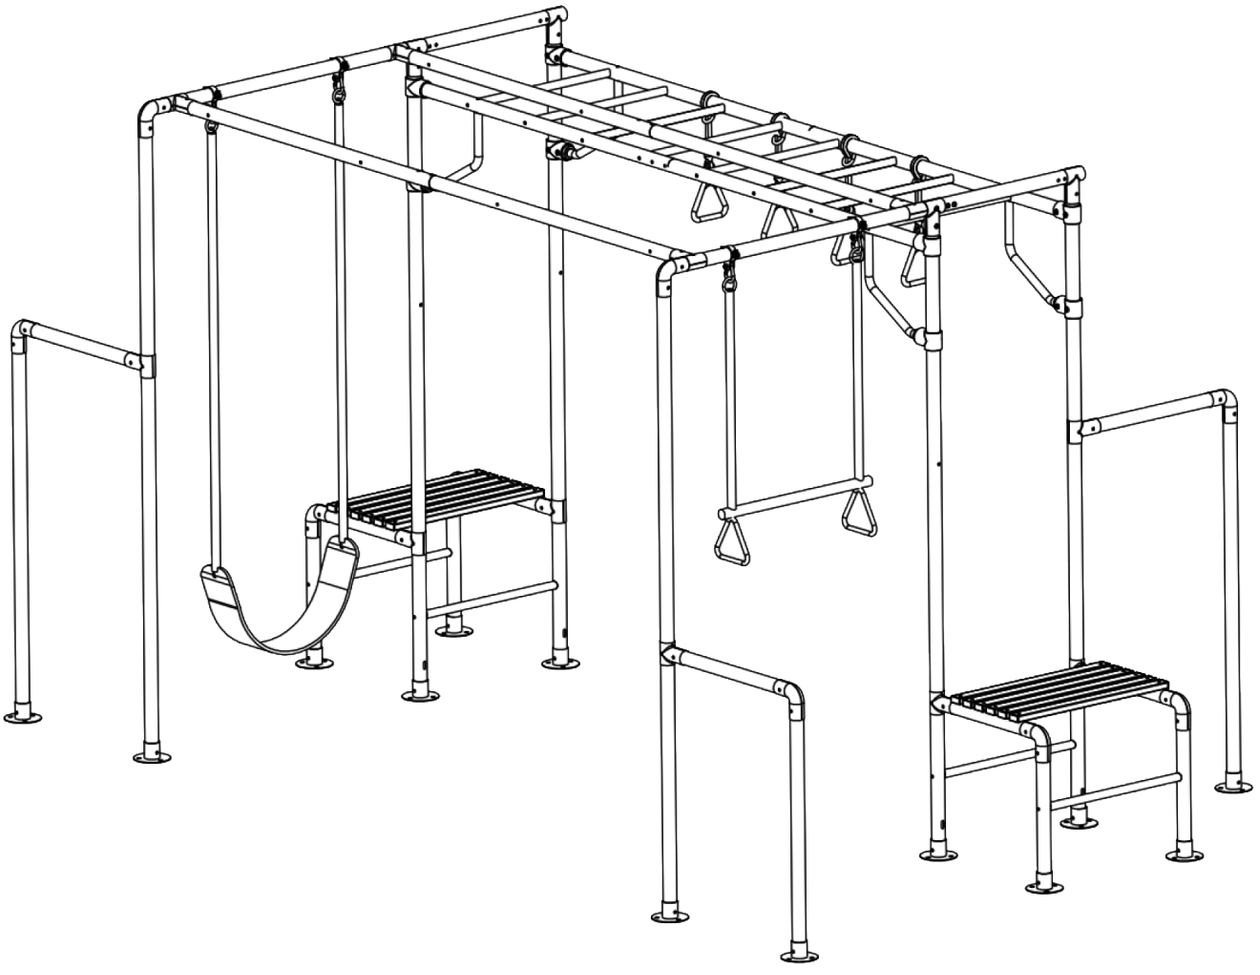


STEP 1

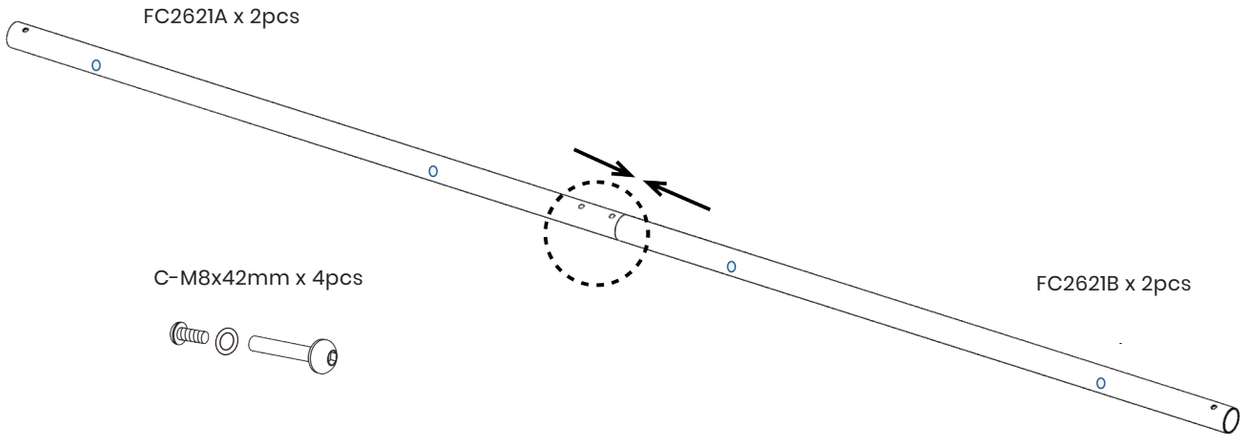

IMPORTANT:
Ensure the spring washer
is fitted on the nut side.


STEP 2

FC2610 x 2pcs supplied in box LK376.

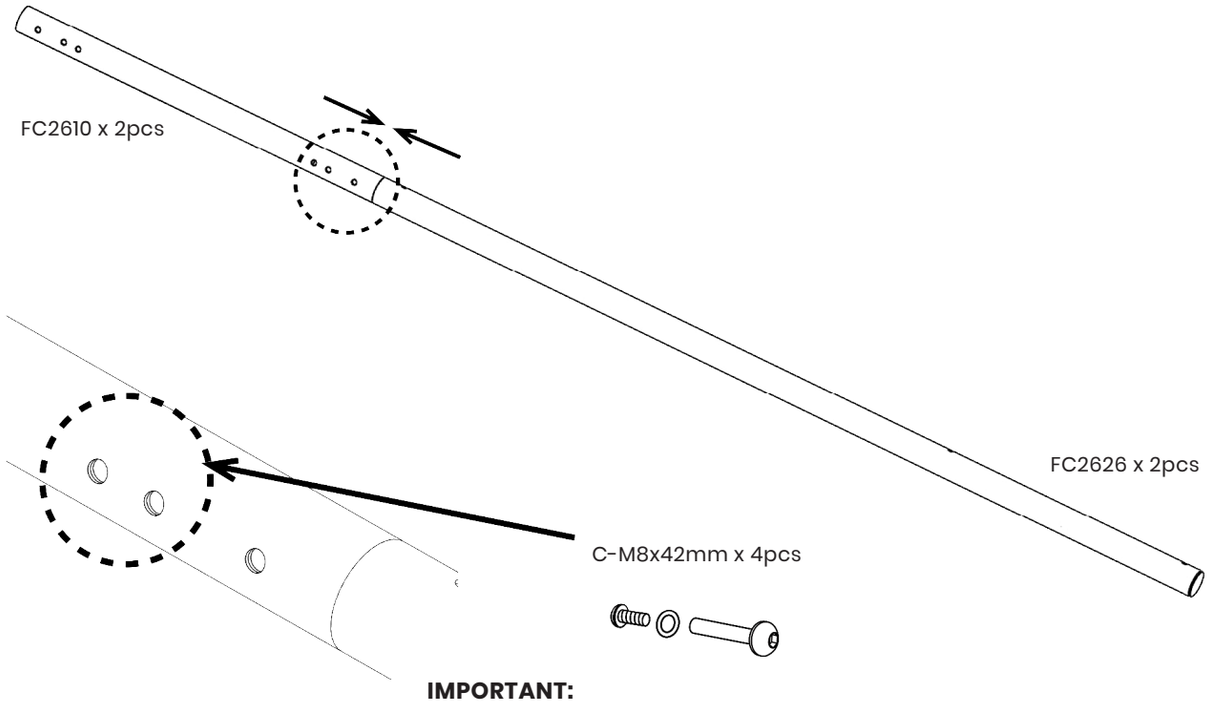


IMPORTANT:
Ensure the spring washer
is fitted on the nut side.


STEP 3

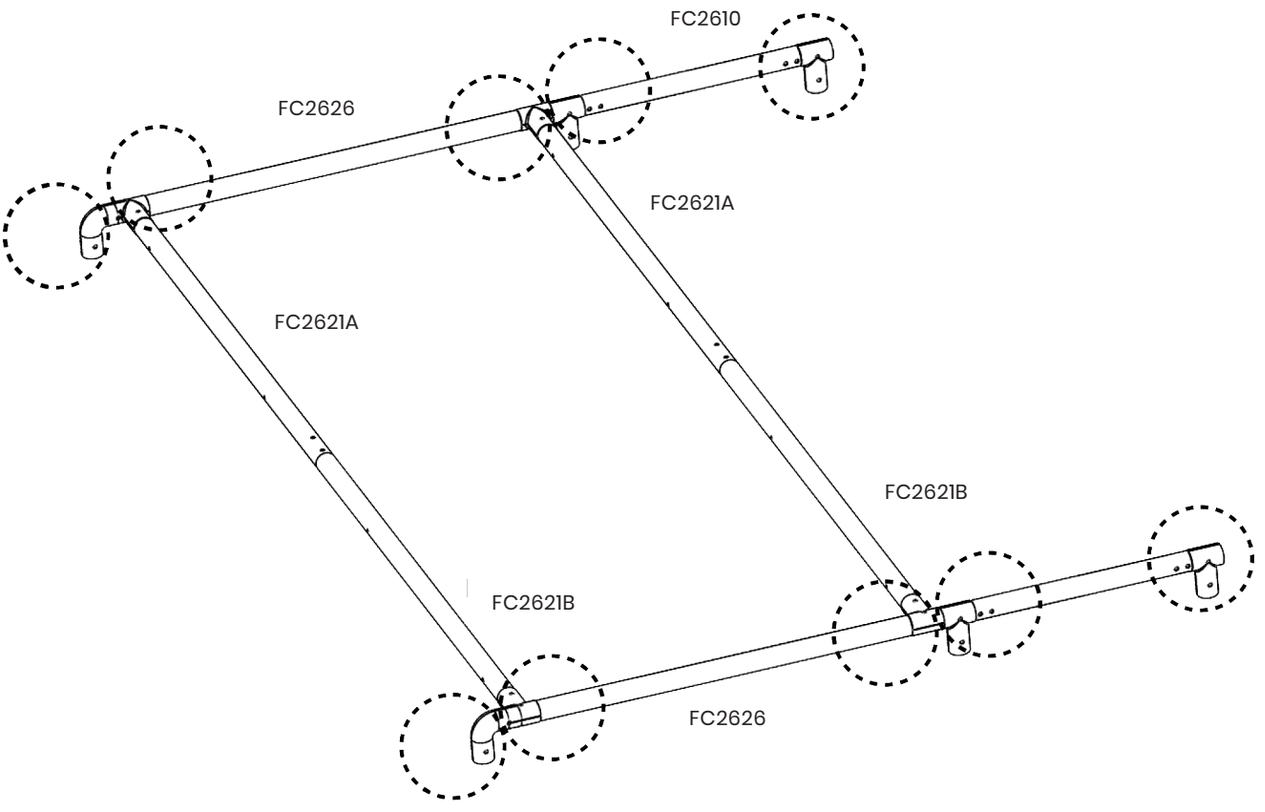


IMPORTANT:
Ensure the spring washer is fitted on the nut side.

A-M8x48mm x 14pcs
(8pcs from box LK376)



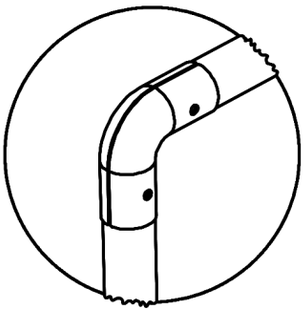


BR01 x 4pcs

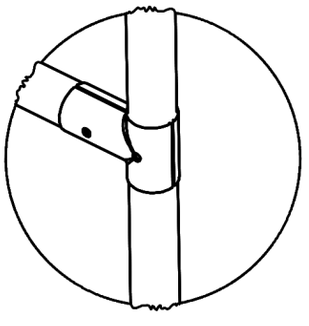



BR02 x 16pcs
(8pcs from box LK376)

STEP 4

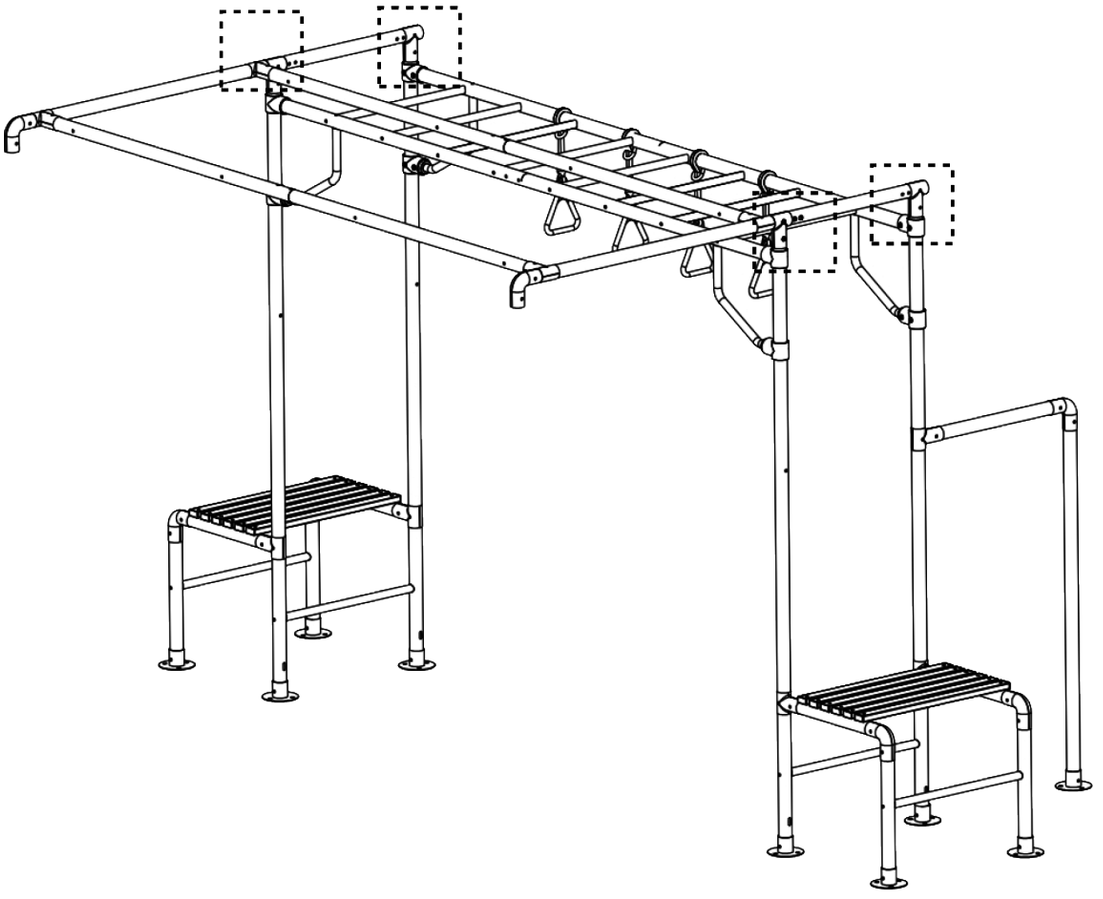


WARNING:
Two adults are required for assembly.

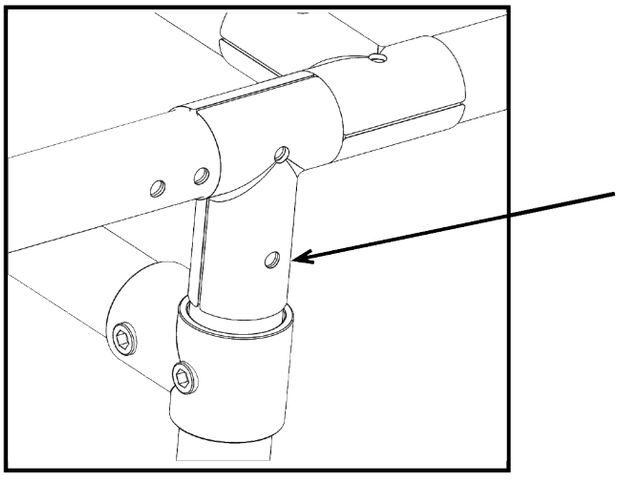

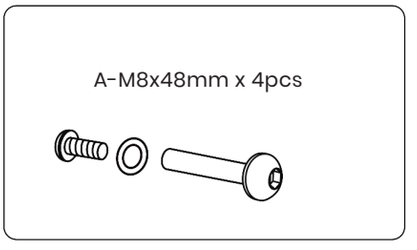


IMPORTANT:
Ensure the spring washer is fitted on the nut side.


STEP 5

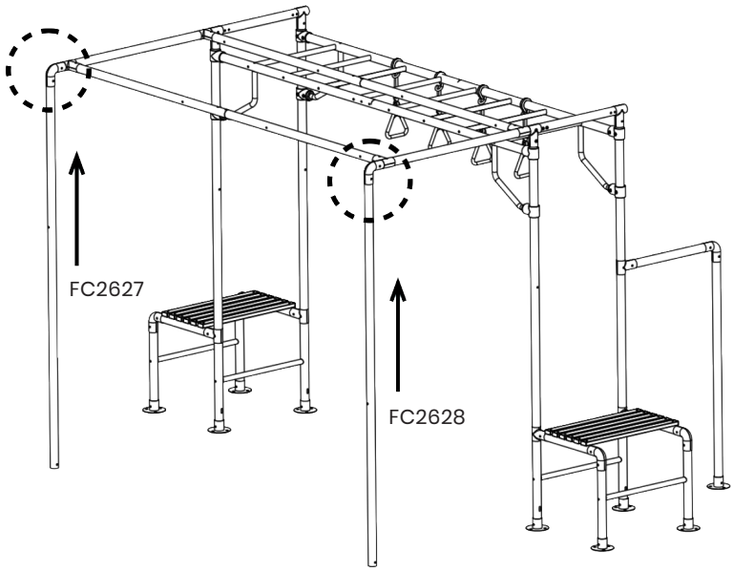

Pole Direction

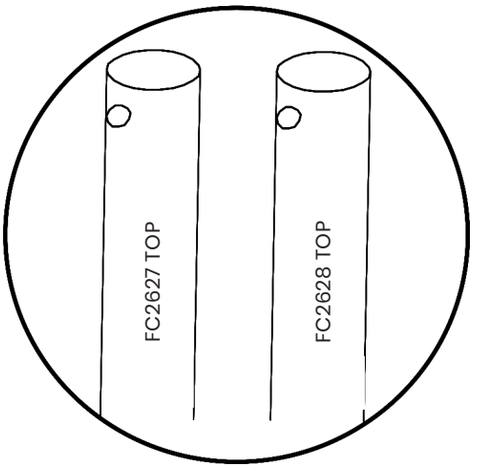


A-M8x48mm x 2pcs





IMPORTANT:
Ensure the spring washer is fitted on the nut side.


STEP 6

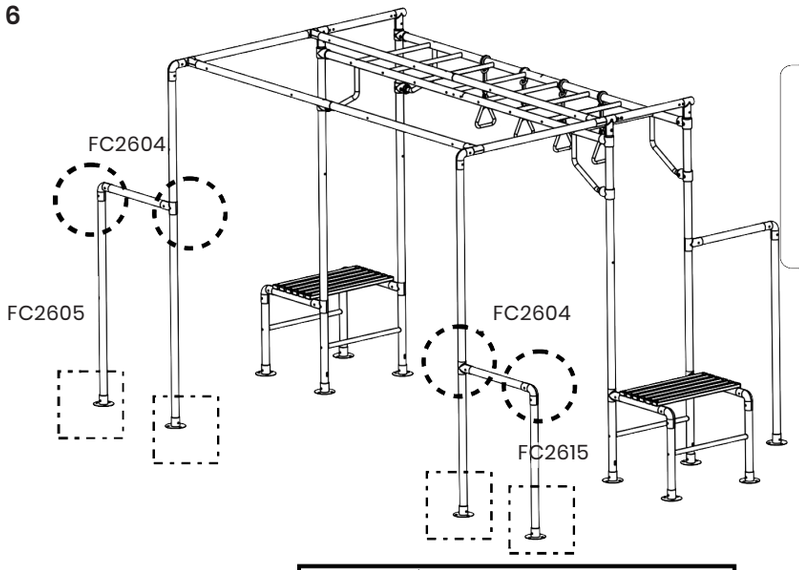

A-M8x48mm x 8pcs




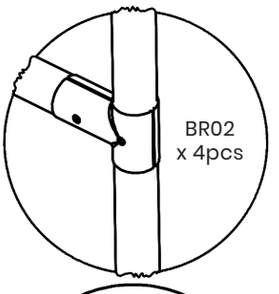

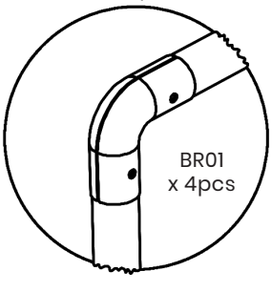


TIP:
Ensure all feet bases are touching the ground and ground is levelled.


IMPORTANT:
Ensure the spring washer is fitted on the nut side.

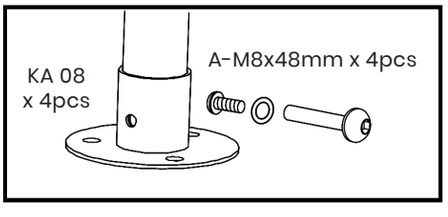



STEP 7

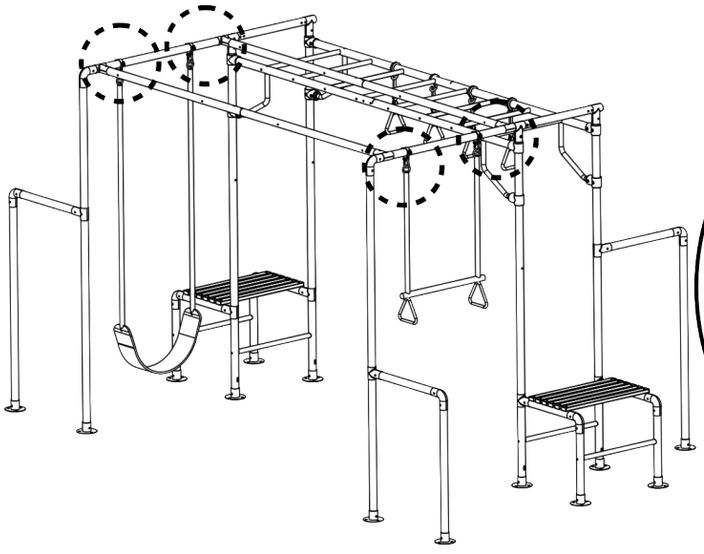

Install the swing seat and trapeze bar.

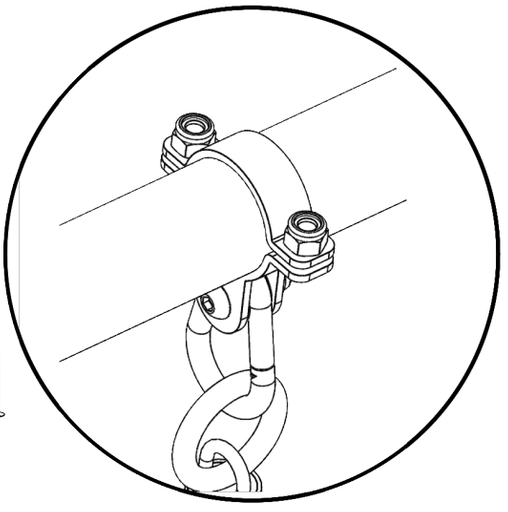

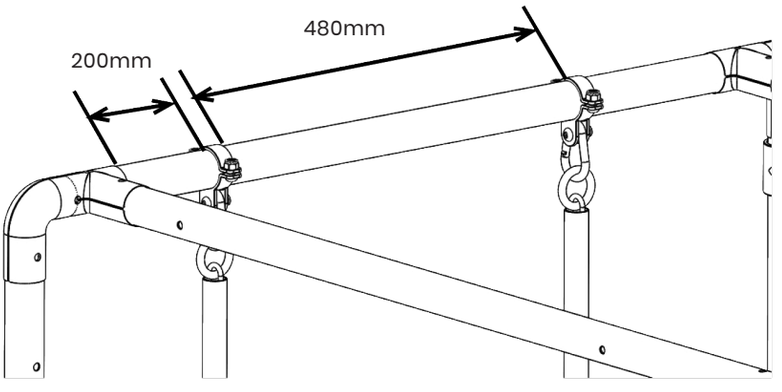

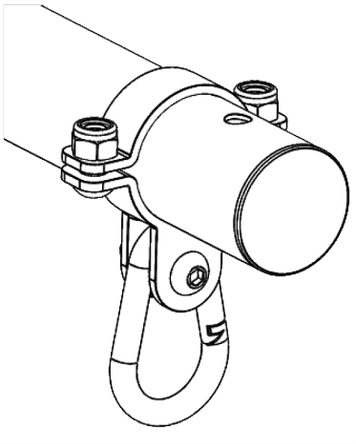



Position the hanging brackets at the distances shown. Ensure each spring hook hangs vertically before fully tightening the bolts.



G-M8x15mm x 4pcs

STEP 8

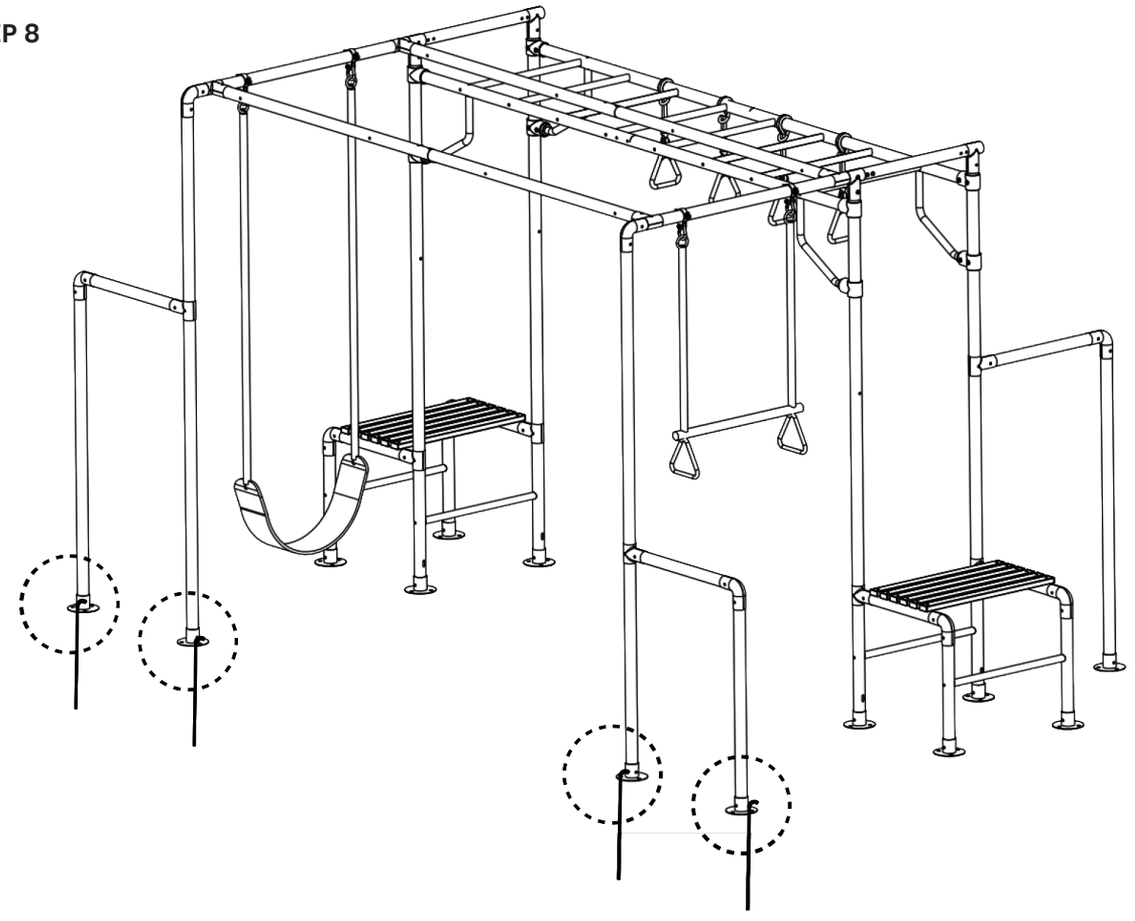

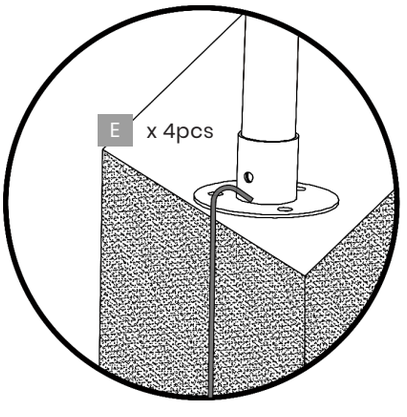


1. Position the climbing gym in its final location and check that the frame is level and stable.
2. Secure the base plates using the ground anchors (E).
3. Ensure all anchors are installed level with or below the ground surface to reduce tripping hazards.
4. Check that the spring washer is fitted on the nut side of each bolted connection.
5. **Fully tighten all bolts and fasteners before use.**

IMPORTANT:


1. The climbing gym must be securely anchored before use.
2. Install on a level surface with suitable impact-absorbing surfacing, such as sand, wood chips, rubber or other appropriate playground surfacing.
3. Do not install over concrete, asphalt or other hard surfaces.
4. Check that all handles, rope loops, anchors, base plates and frame connections are secure before each use.
5. Do not use the equipment if any component is loose, damaged or incorrectly installed.

JUNIOR JUNGLE 3.0 (LK376, LK377 & LK380)

This combination uses steps and parts from LK376 and LK377.
See contents page for LK376 and LK377 steps.

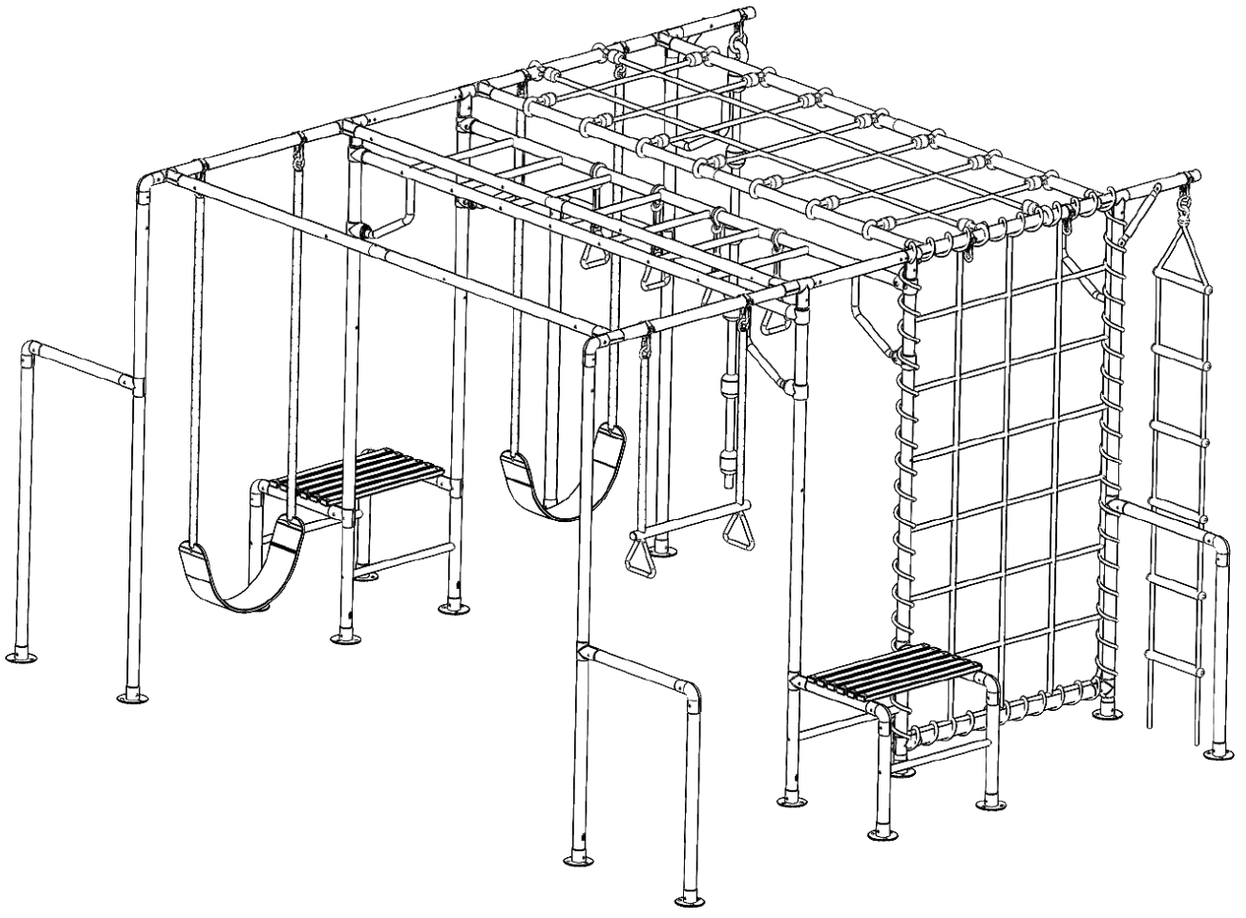


STEP 1

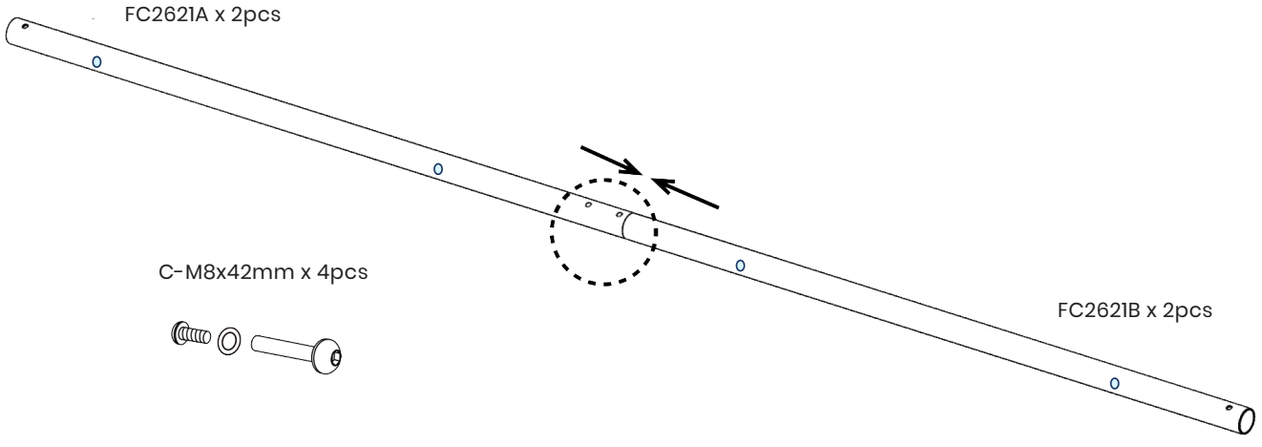



IMPORTANT:
Ensure the spring washer
is fitted on the nut side.

STEP 2

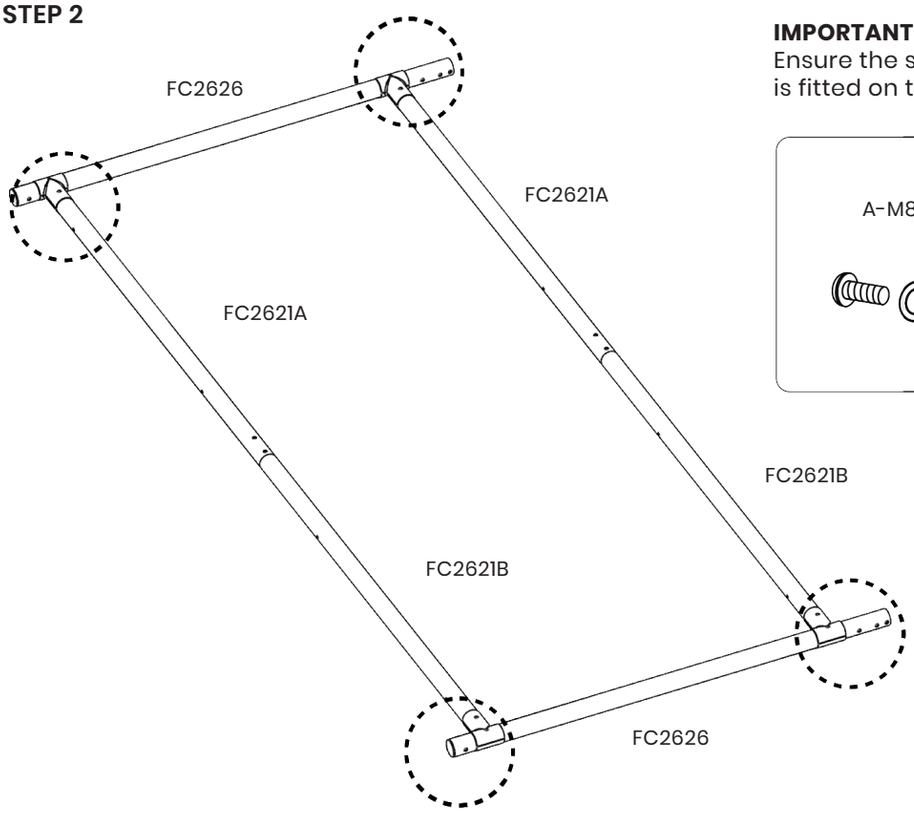

IMPORTANT:
Ensure the spring washer
is fitted on the nut side.

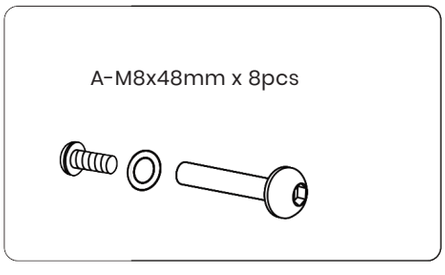


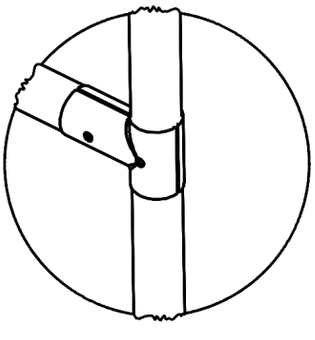

BR02 x 8pcs


STEP 3

Refer to the pages of LK376 and 377 first before installing the swing frame.

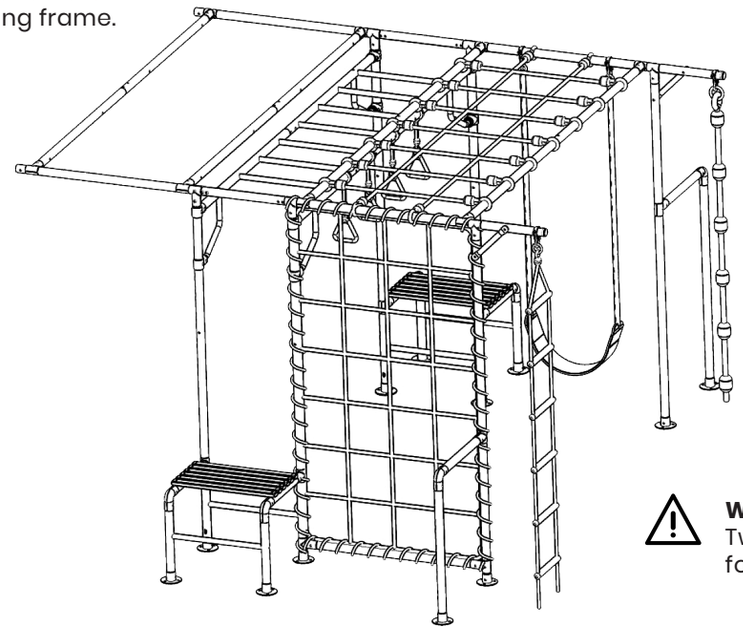


WARNING:
Two adults are required for assembly.


1. Remove this bolt for the next assembly step.

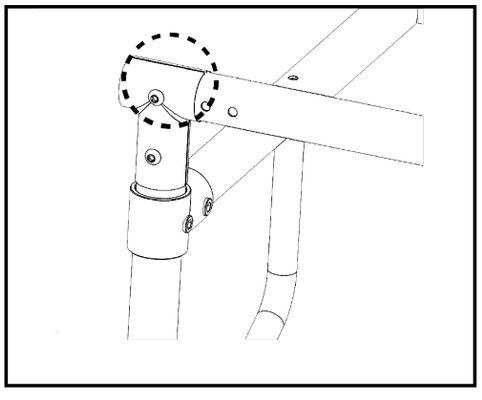


2. Insert the swaged end into FC2610.

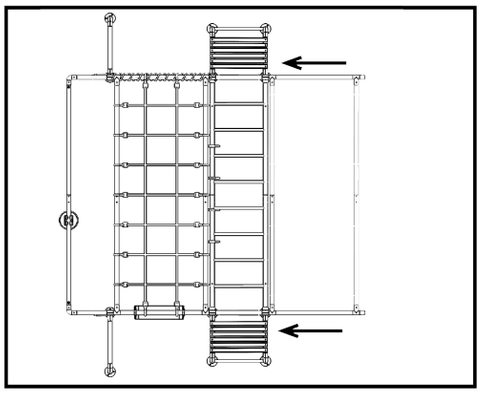

3. Refit the removed bolt and install the remaining A bolts at both ends.

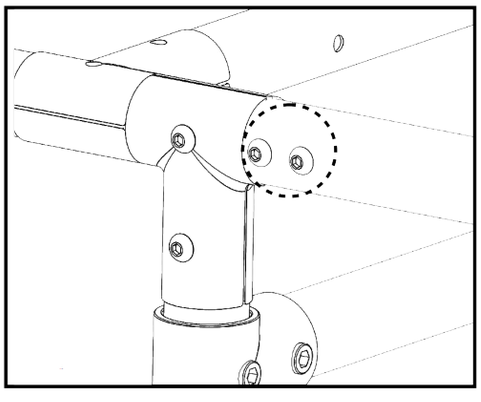


A-M8x42mm x 4pcs




IMPORTANT:
Ensure the spring washer is fitted on the nut side.


STEP 4

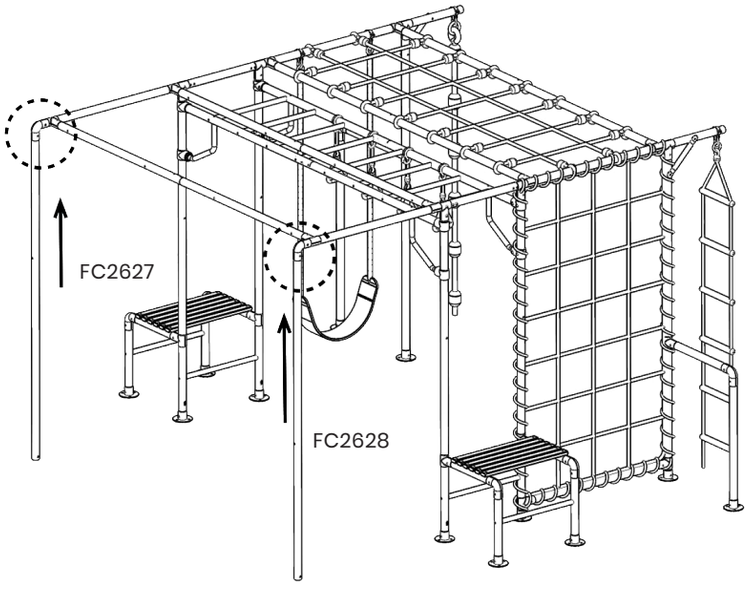


Pole Direction

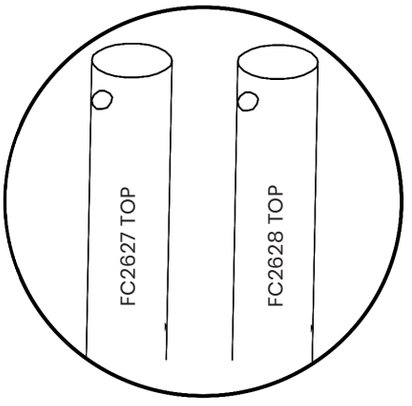


IMPORTANT:
Ensure the spring washer is fitted on the nut side.

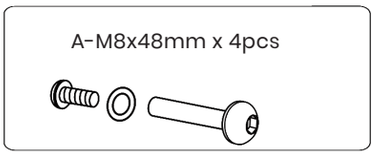


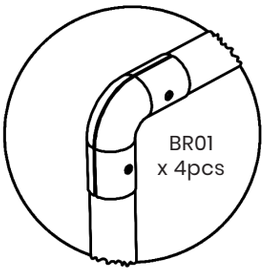


STEP 5

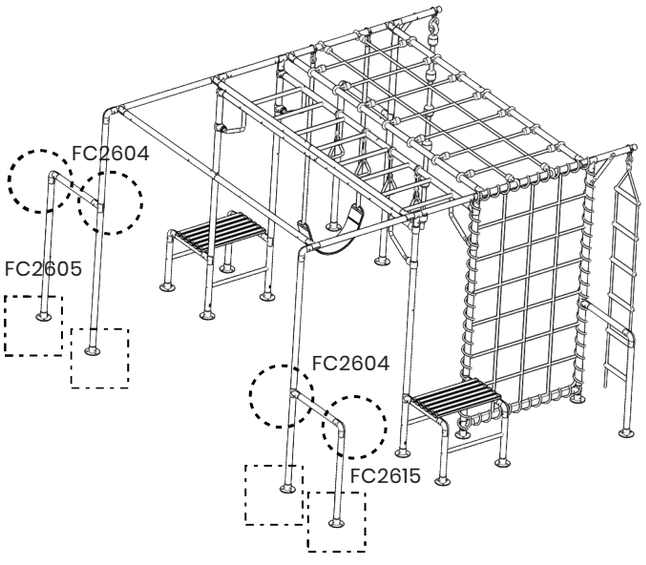


IMPORTANT:
Ensure the spring washer is fitted on the nut side.

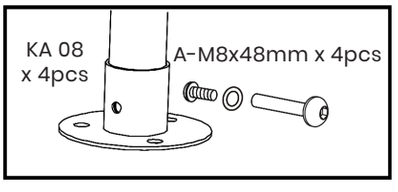


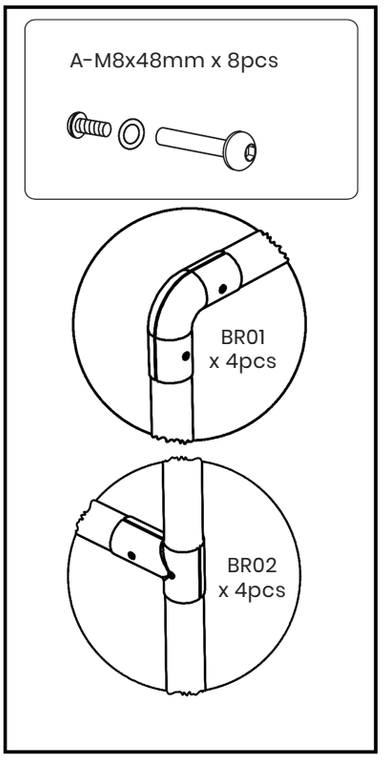



STEP 6

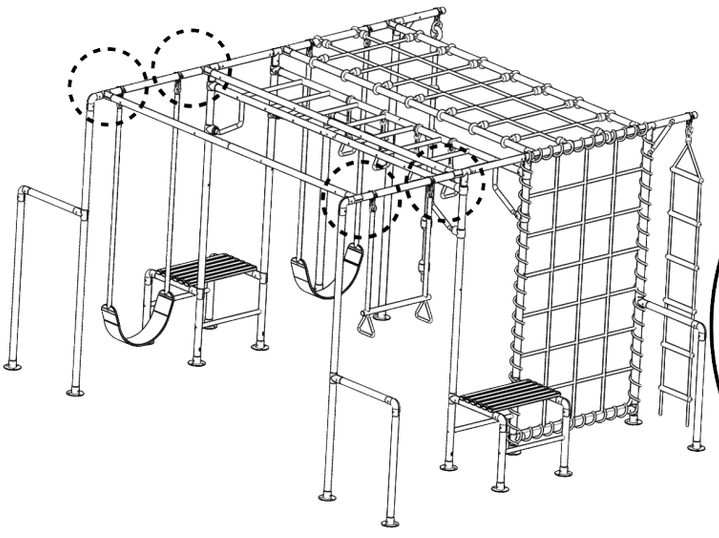

Install the swing seat and trapeze bar

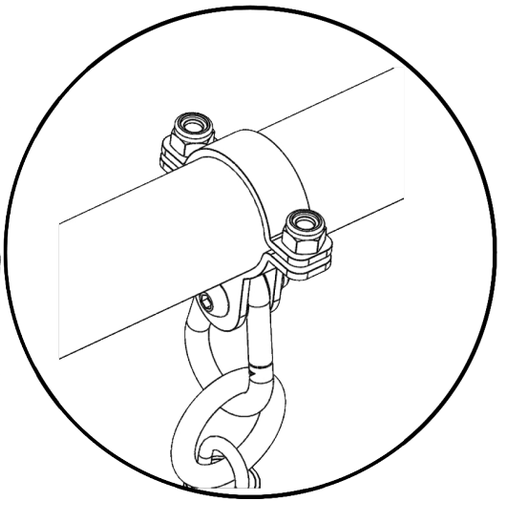

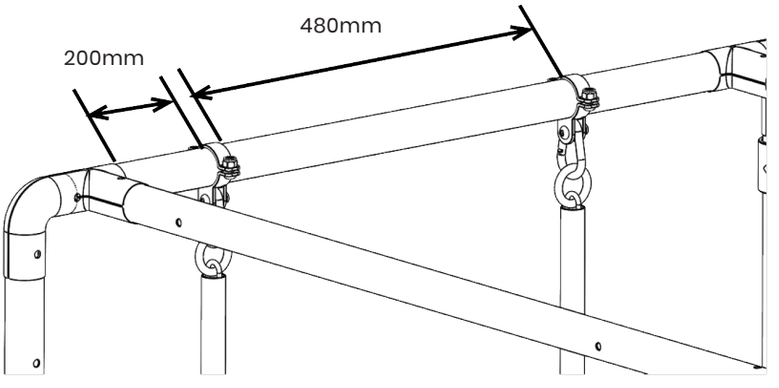

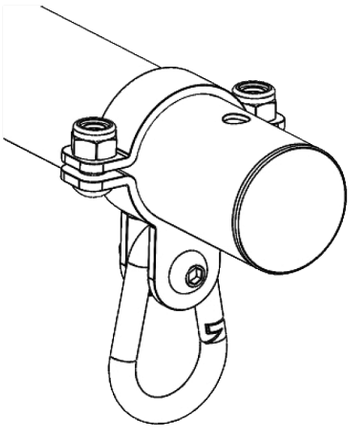



Position the hanging brackets at the distances shown. Ensure each spring hook hangs vertically before fully tightening the bolts.



G-M8x15mm x 4pcs

STEP 7

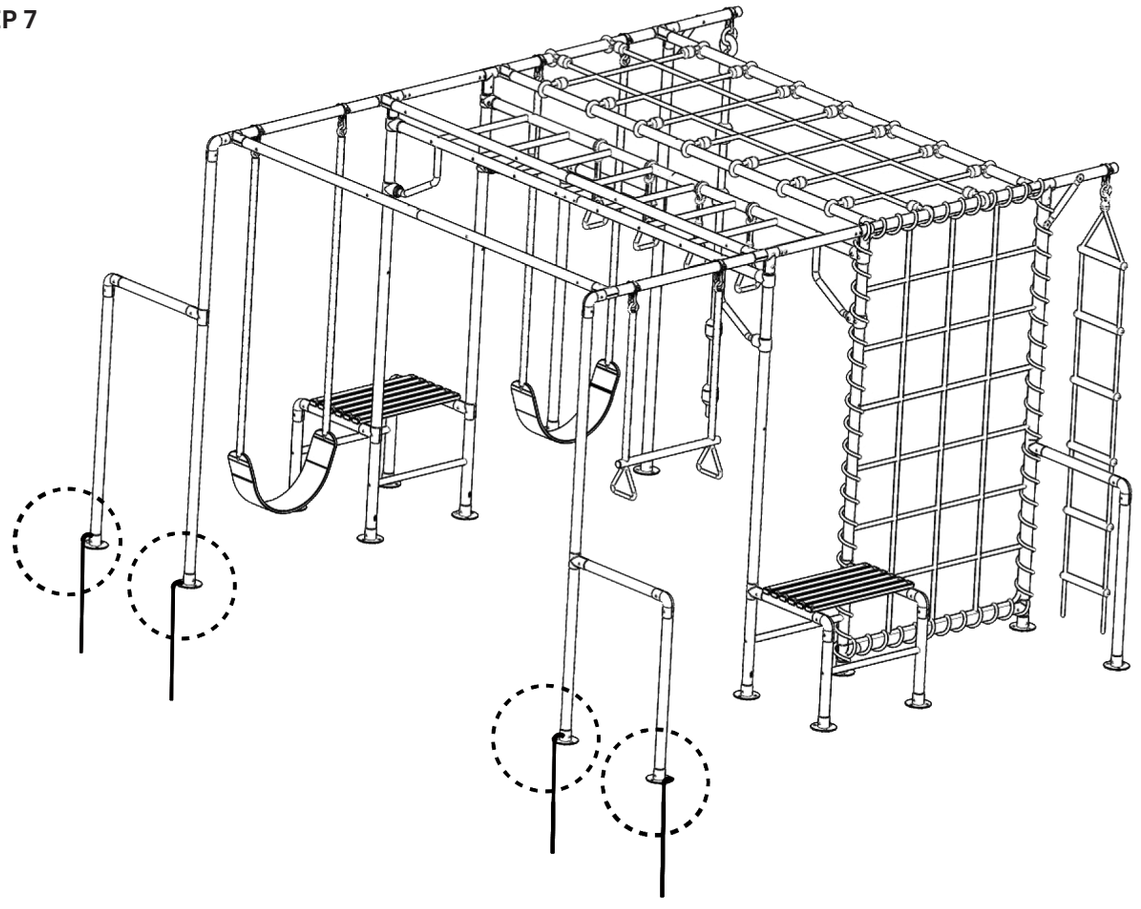

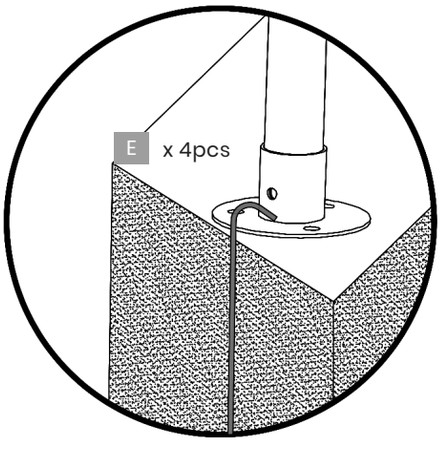


1. Position the climbing gym in its final location and check that the frame is level and stable.
2. Secure the base plates using the ground anchors (E).
3. Ensure all anchors are installed level with or below the ground surface to reduce tripping hazards.
4. Check that the spring washer is fitted on the nut side of each bolted connection.
5. **Fully tighten all bolts and fasteners before use.**

IMPORTANT:


1. The climbing gym must be securely anchored before use.
2. Install on a level surface with suitable impact-absorbing surfacing, such as sand, wood chips, rubber or other appropriate playground surfacing.
3. Do not install over concrete, asphalt or other hard surfaces.
4. Check that all handles, rope loops, anchors, base plates and frame connections are secure before each use.
5. Do not use the equipment if any component is loose, damaged or incorrectly installed.

JUNIOR JUNGLE 3.1 (LK376, LK377, LK378, LK379 & LK380)

This combination uses steps and parts from LK376, LK377, LK378 and LK379.
See contents page for LK376, LK377, LK378 and LK379 steps.

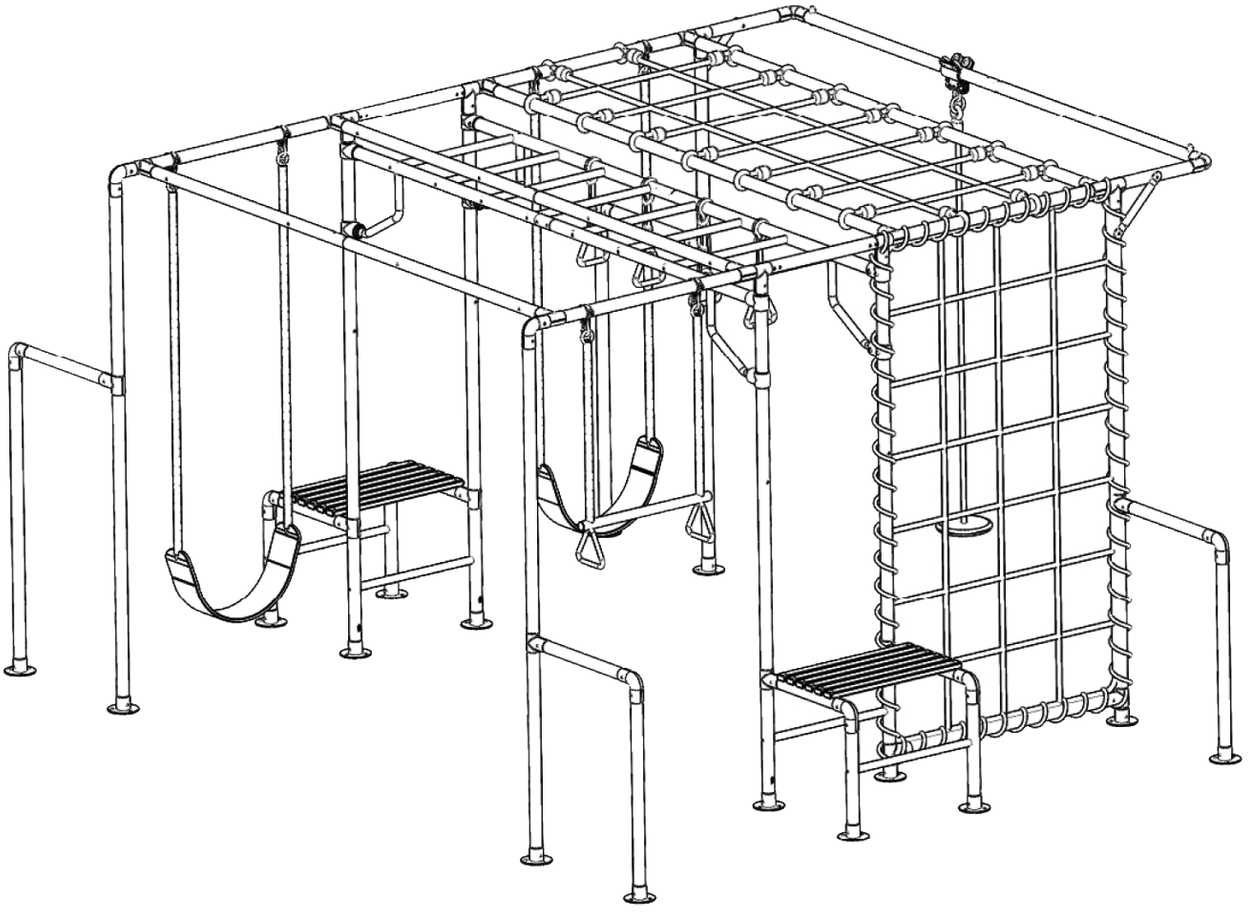


STEP 1

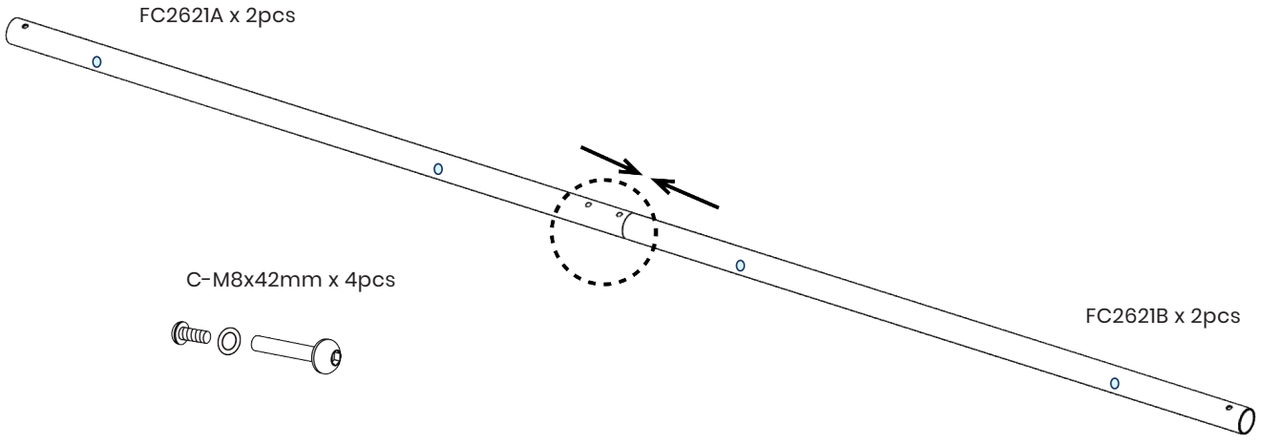


IMPORTANT:
Ensure the spring washer
is fitted on the nut side.

STEP 2

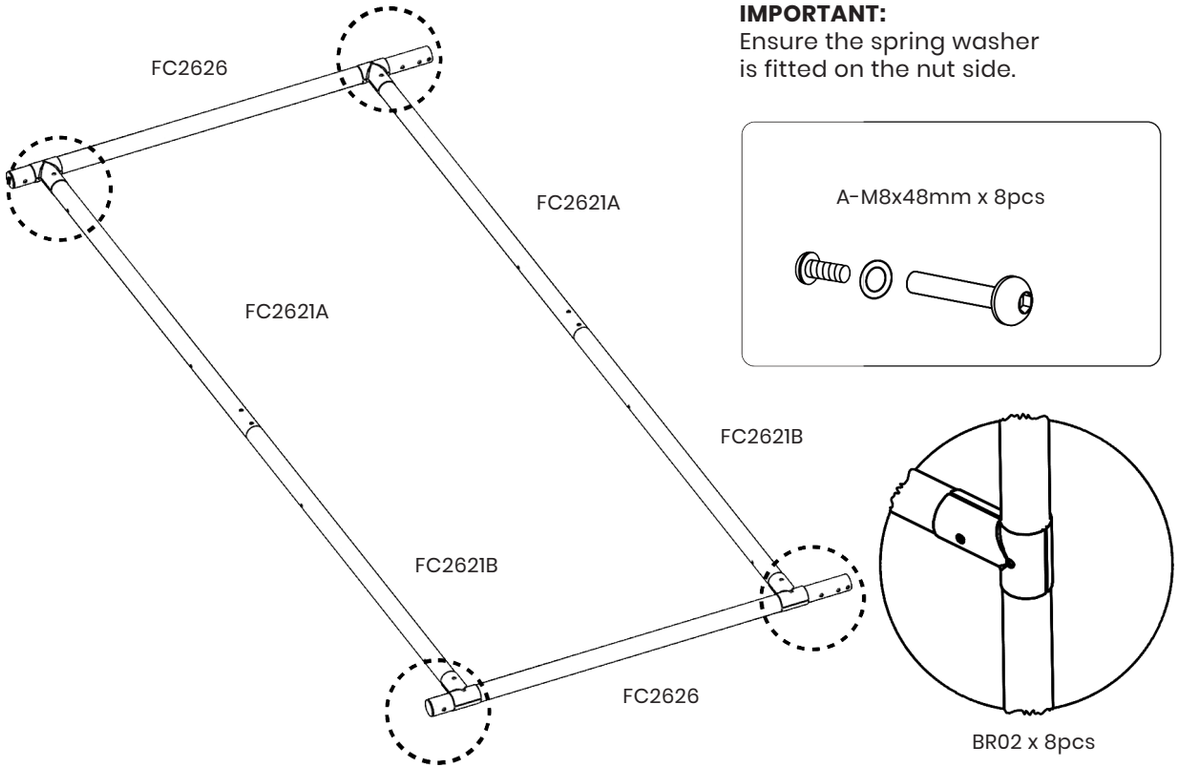


IMPORTANT:
Ensure the spring washer
is fitted on the nut side.

STEP 3 Refer to the previous pages for LK376, LK377, LK378 and LK379 first before installing this frame.

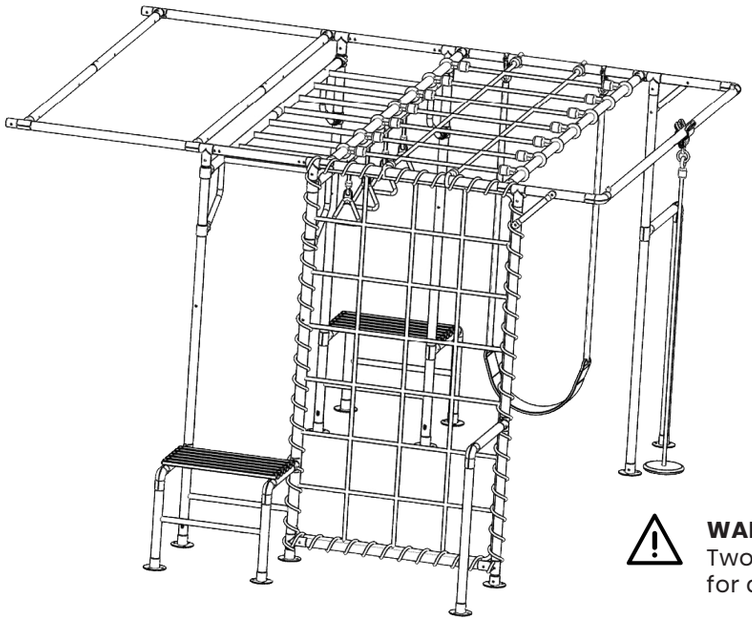


WARNING:
Two adults are required for assembly.


1. Remove this bolt for the next assembly step.

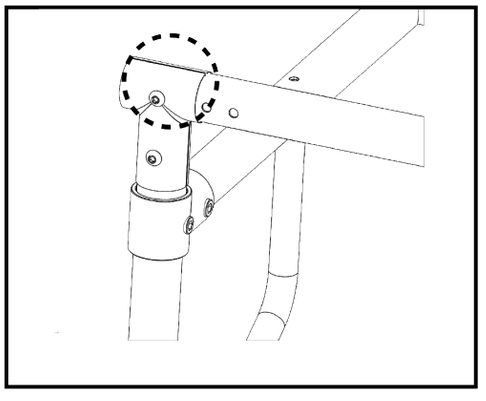

2. Insert the swaged end into FC2610.

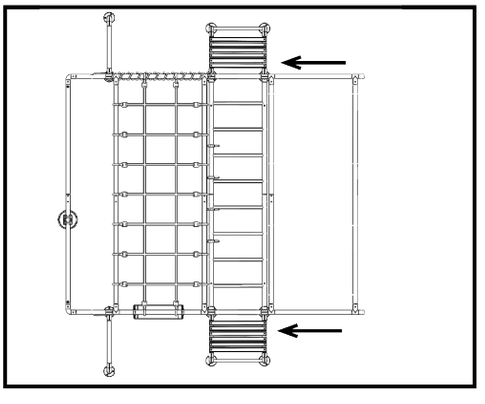

3. Refit the removed bolt and install the remaining A bolts at both ends.

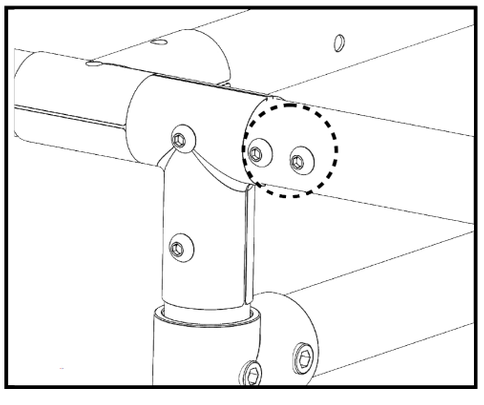


A-M8x42mm x 4pcs




IMPORTANT:
Ensure the spring washer is fitted on the nut side.

STEP 4

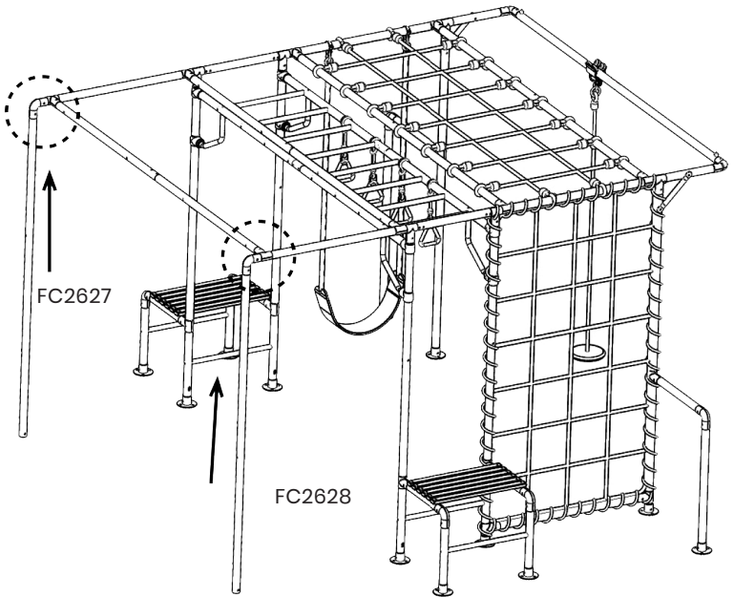



Pole Direction

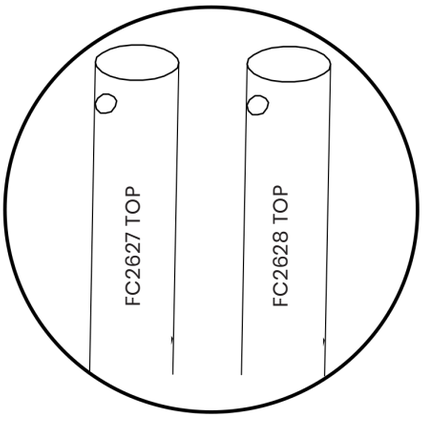


IMPORTANT:
Ensure the spring washer is fitted on the nut side.

A-M8x48mm x 4pcs




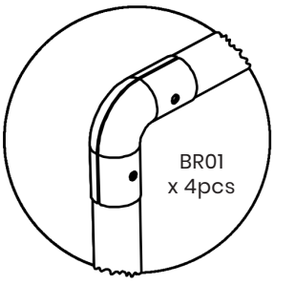


STEP 5

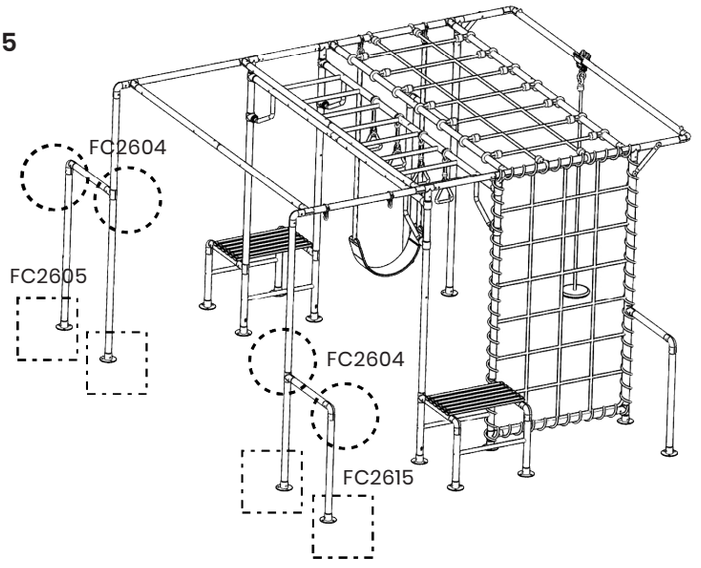



IMPORTANT:
Ensure the spring washer is fitted on the nut side.

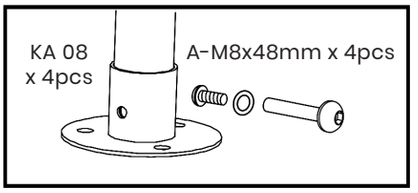


A-M8x48mm x 8pcs



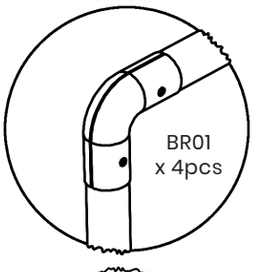


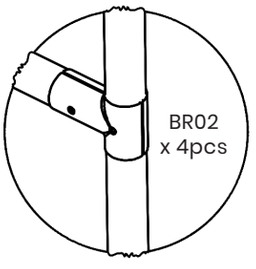



STEP 6

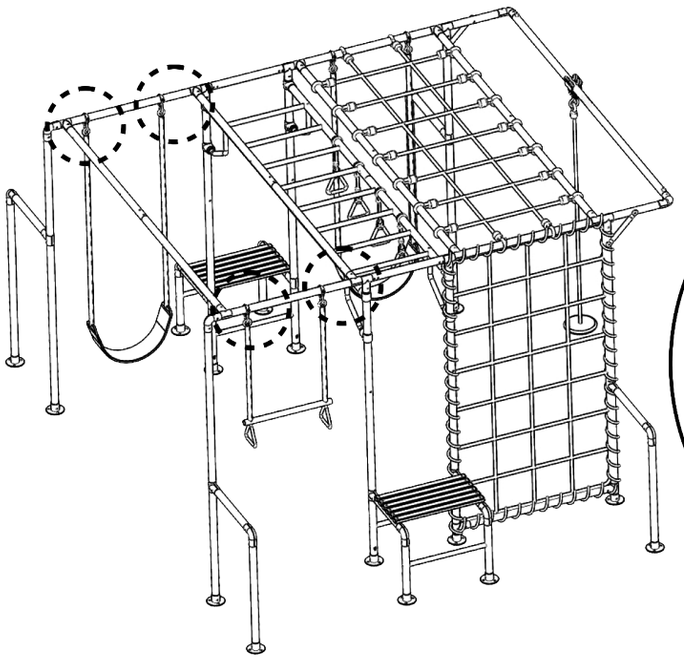

Install the swing seat and trapeze bar

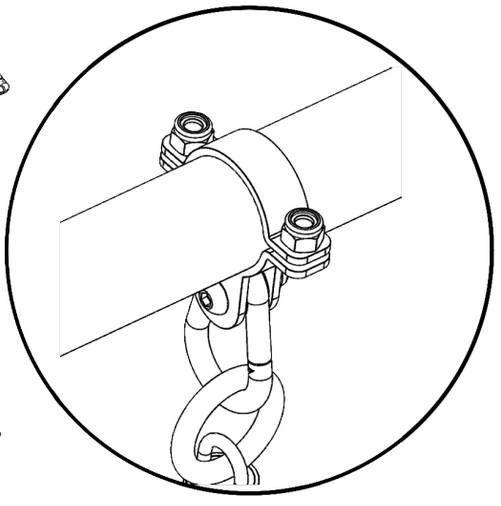

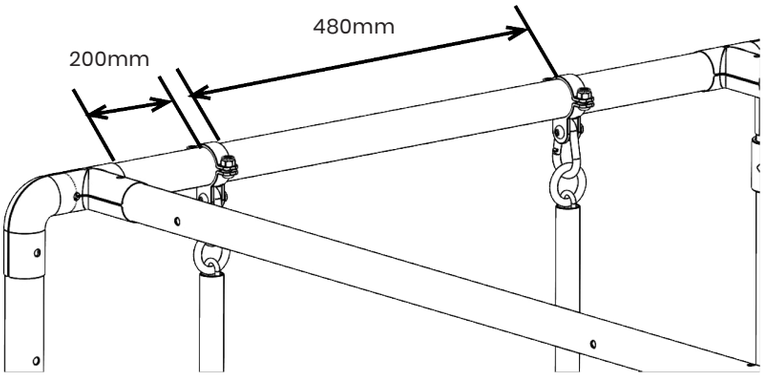

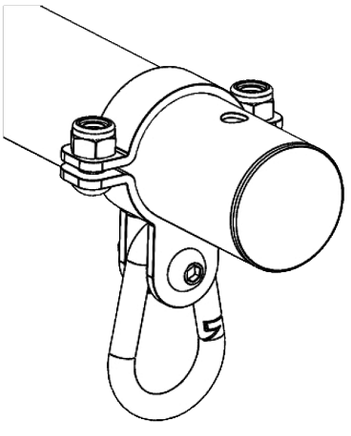


Position the hanging brackets at the distances shown. Ensure each spring hook hangs vertically before fully tightening the bolts.



G-M8x15mm x 4pcs

STEP 7

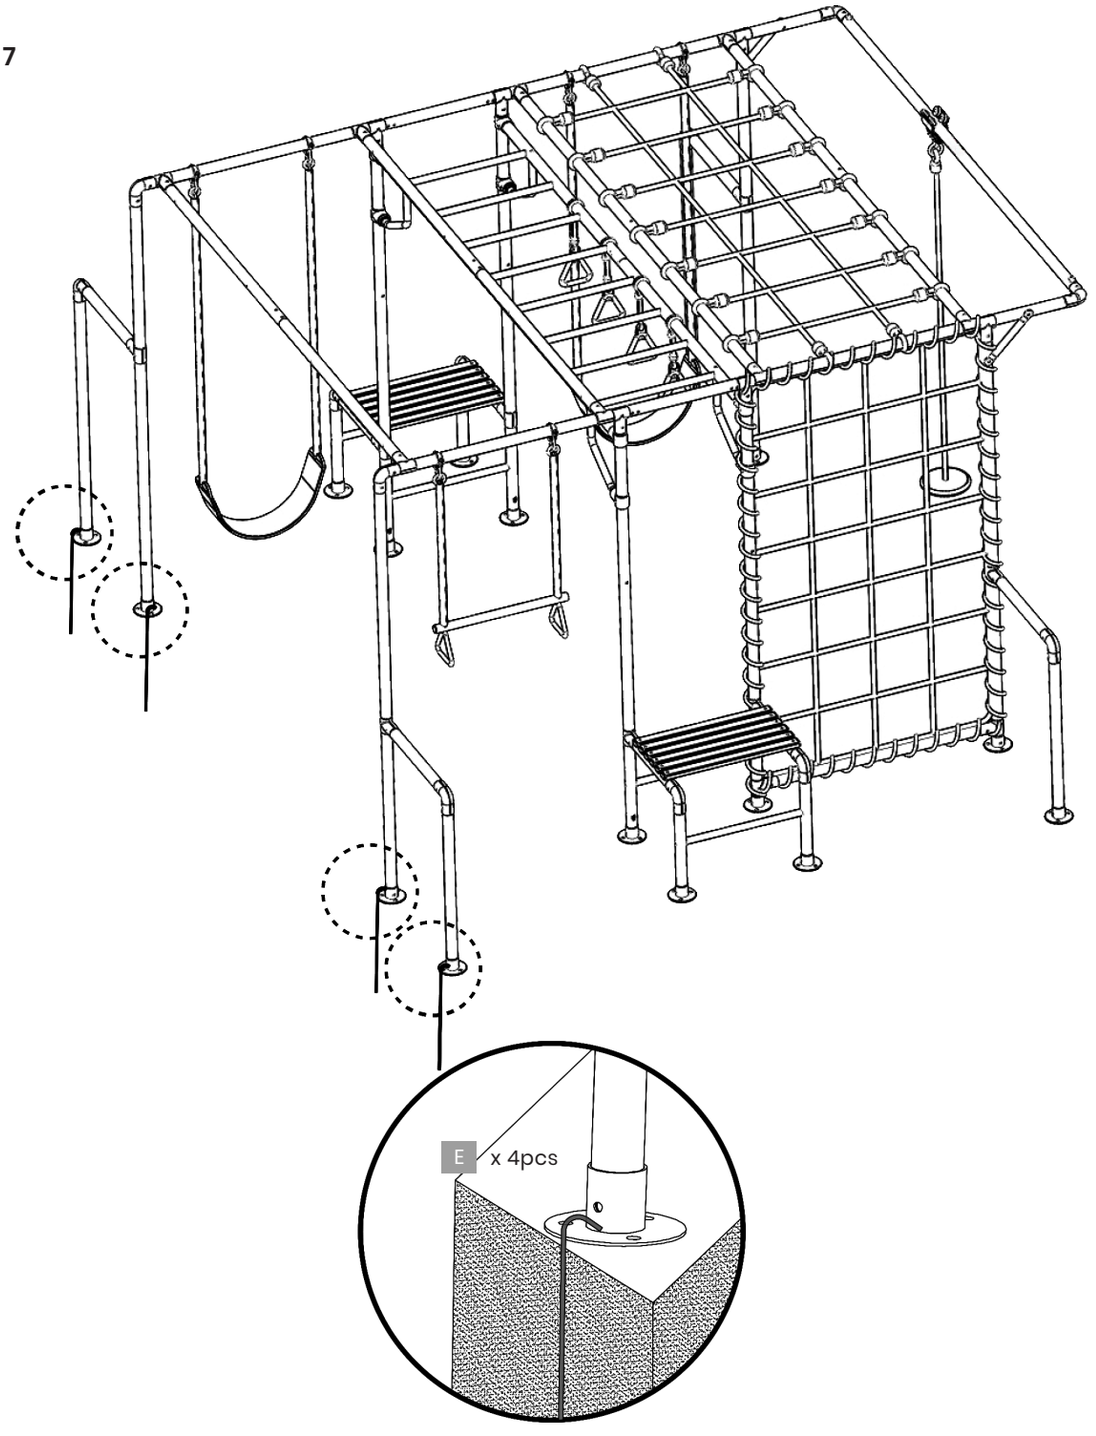


1. Position the climbing gym in its final location and check that the frame is level and stable.
2. Secure the base plates using the ground anchors (E).
3. Ensure all anchors are installed level with or below the ground surface to reduce tripping hazards.
4. Check that the spring washer is fitted on the nut side of each bolted connection.
5. **Fully tighten all bolts and fasteners before use.**

IMPORTANT:


1. The climbing gym must be securely anchored before use.
2. Install on a level surface with suitable impact-absorbing surfacing, such as sand, wood chips, rubber or other appropriate playground surfacing.
3. Do not install over concrete, asphalt or other hard surfaces.
4. Check that all handles, rope loops, anchors, base plates and frame connections are secure before each use.
5. Do not use the equipment if any component is loose, damaged or incorrectly installed.

JUNIOR JUNGLE 2.2 (LK376, LK380 & LK381)

This combination uses steps and parts from LK376 and LK380.
See contents page for LK376 and LK380 steps.

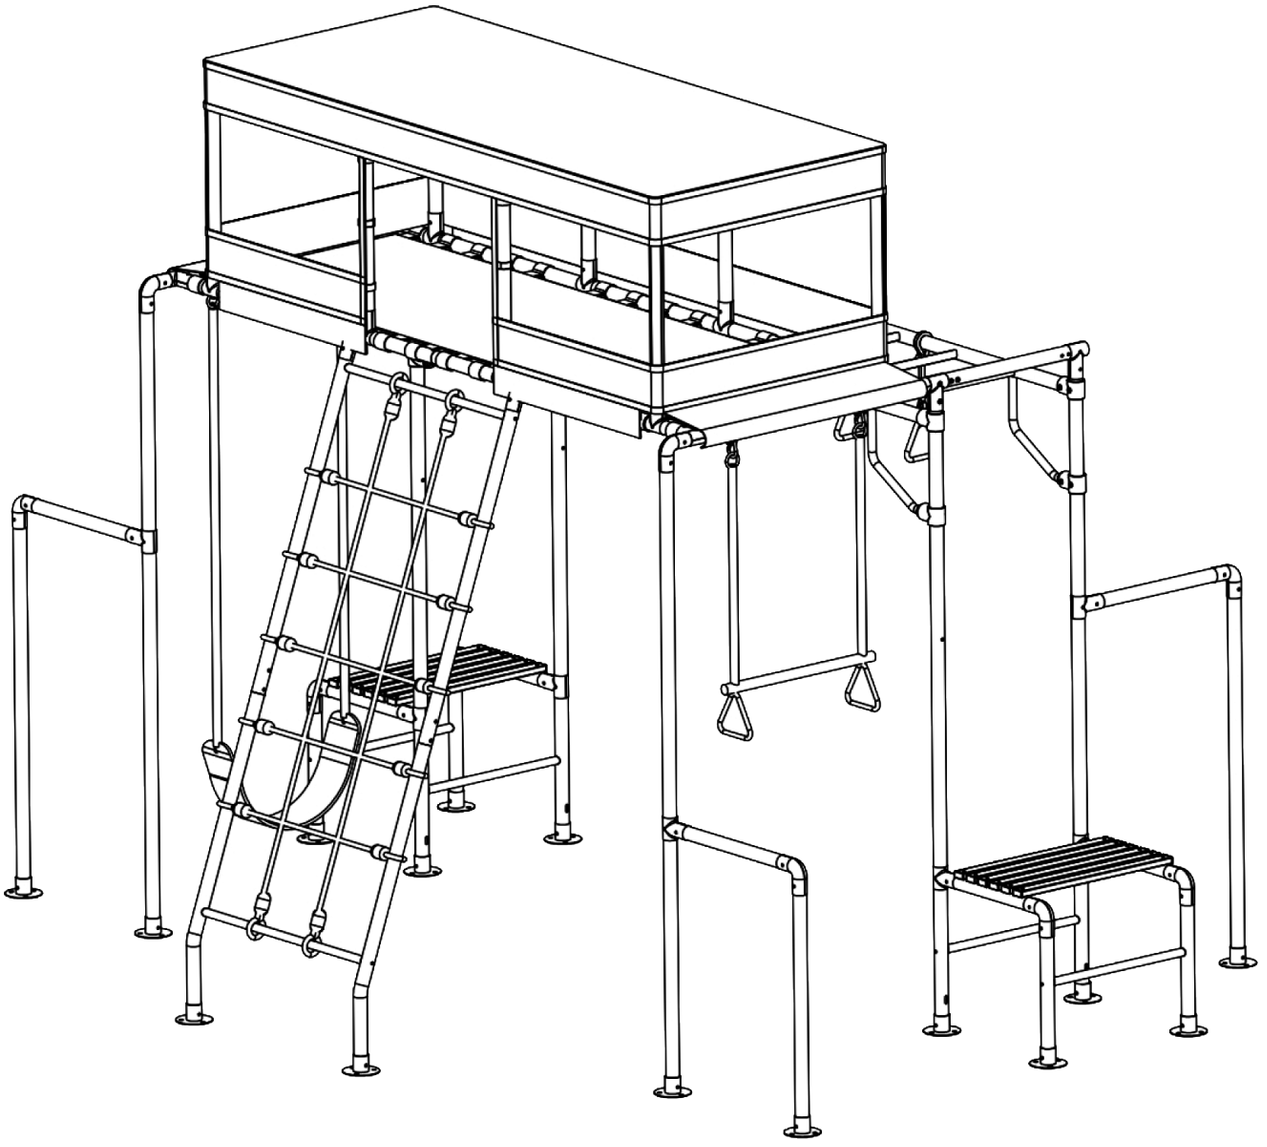



STEP 1

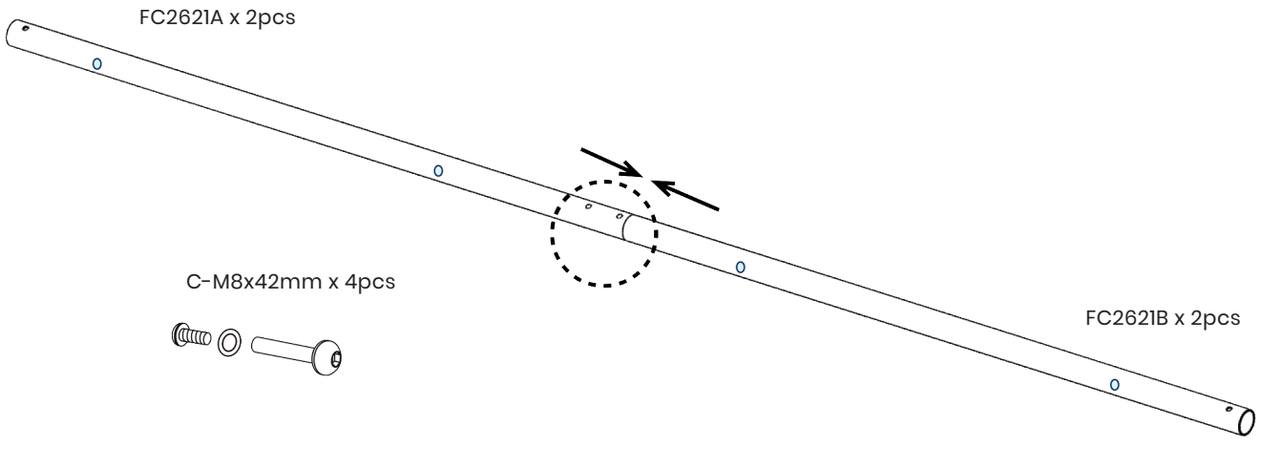


IMPORTANT:
Ensure the spring washer is fitted on the nut side.

STEP 2

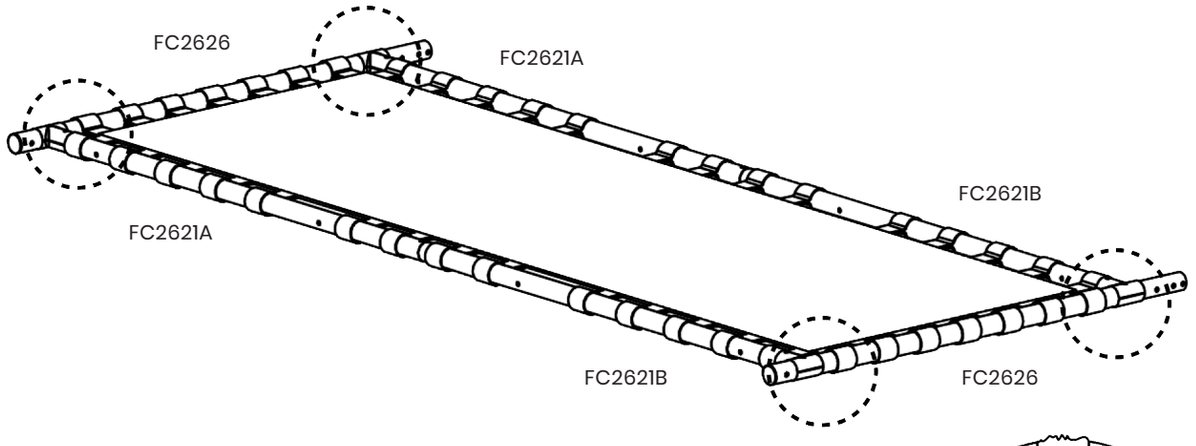


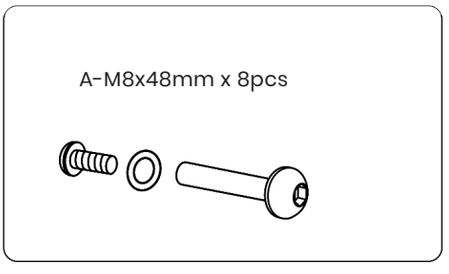

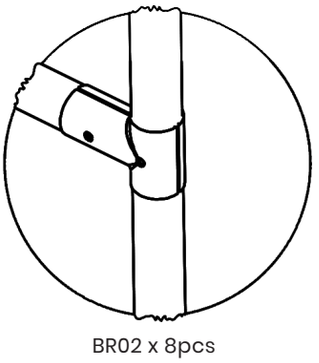


IMPORTANT:
Ensure the spring washer is fitted on the nut side.

STEP 3 Refer to previous page LK376 before installing the frame.

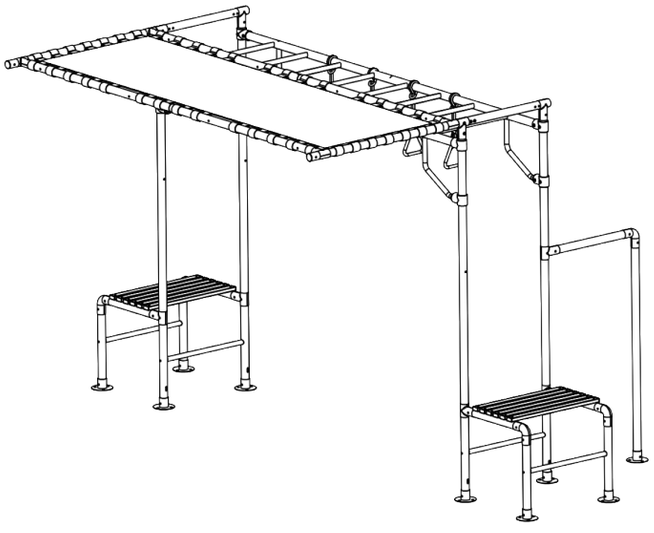


WARNING:
Two adults are required for assembly.


1. Remove this bolt for the next assembly step.

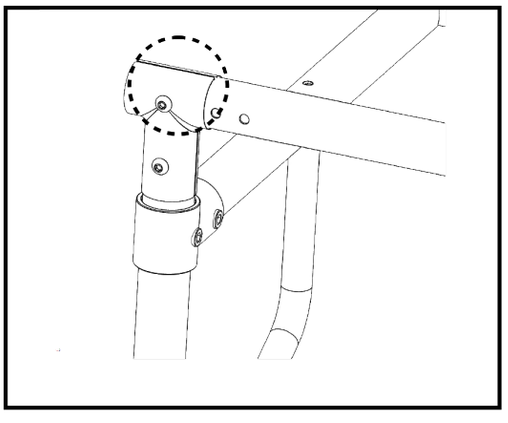


2. Insert the swaged end into FC2610.

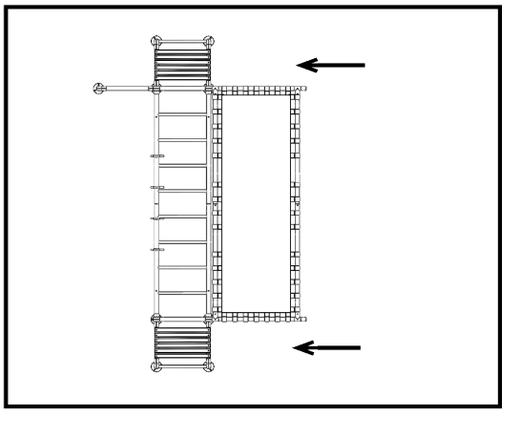

3. Refit the removed bolt and install the remaining A bolts at both ends.

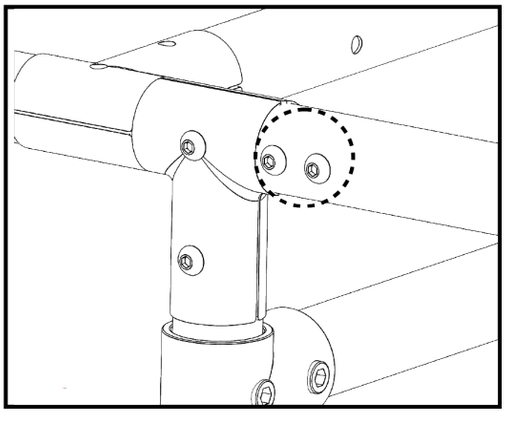


A-M8x42mm x 4pcs





IMPORTANT:
Ensure the spring washer is fitted on the nut side.


STEP 4

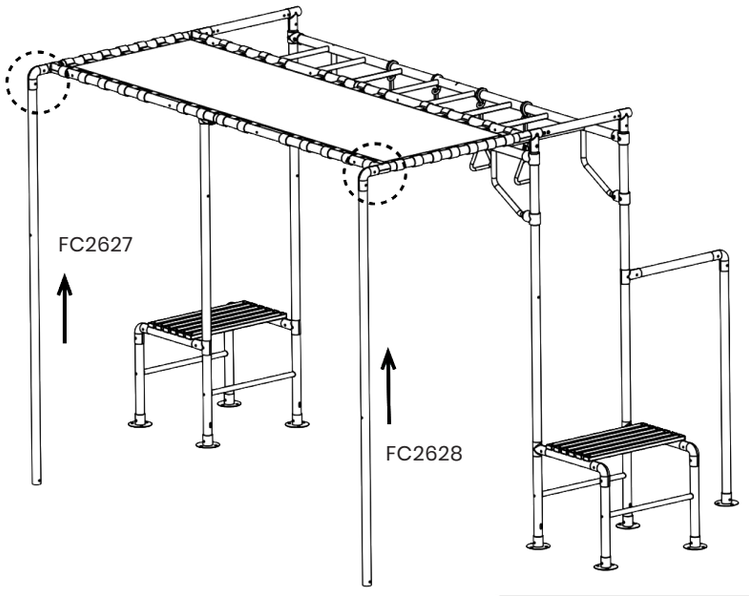

Pole Direction

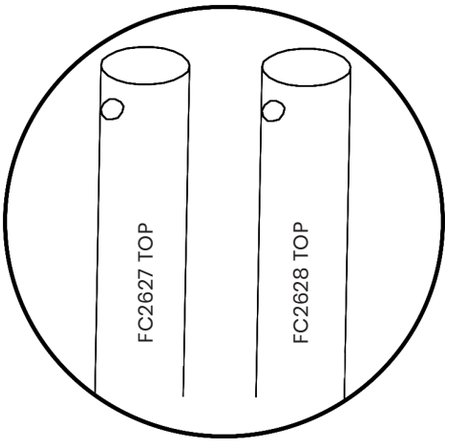


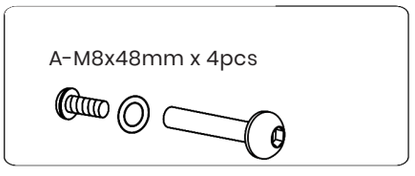


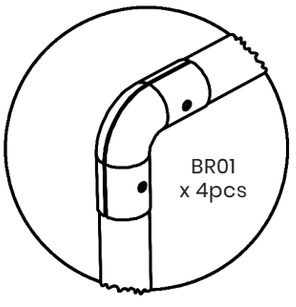



IMPORTANT:
Ensure the spring washer is fitted on the nut side.


STEP 5

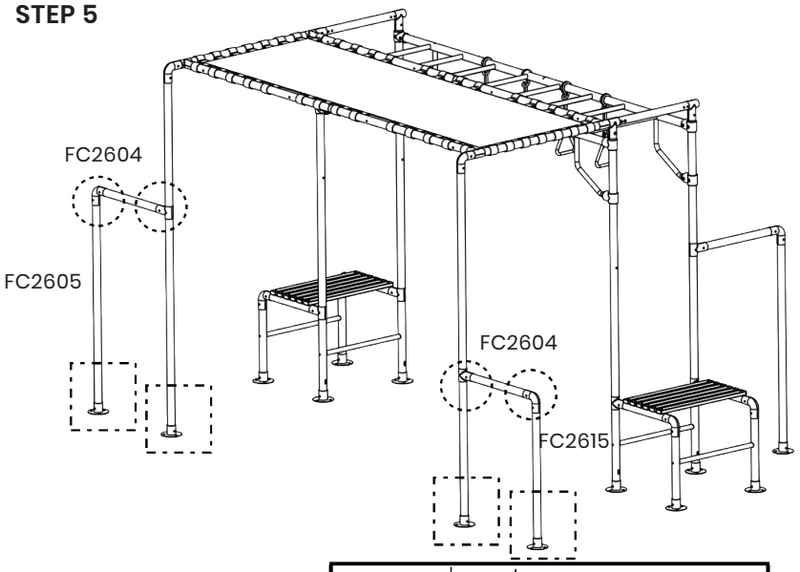

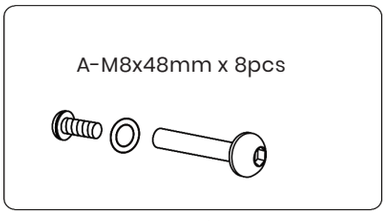

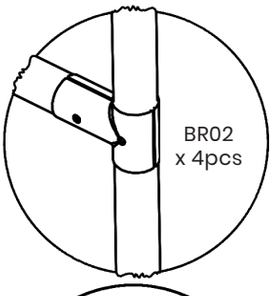


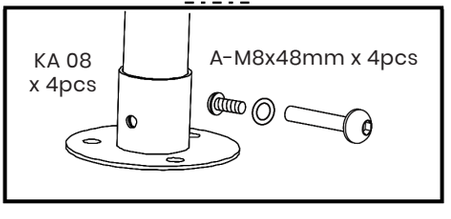

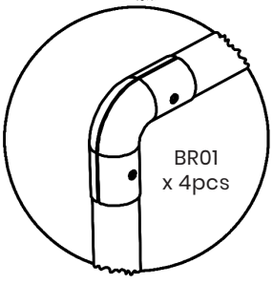



IMPORTANT:
Ensure the spring washer is fitted on the nut side.


STEP 6

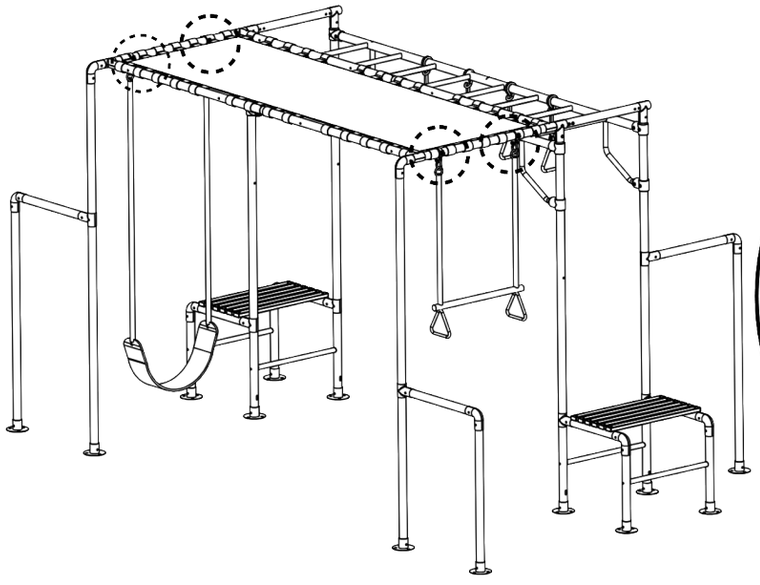

Install the swing seat and trapeze bar

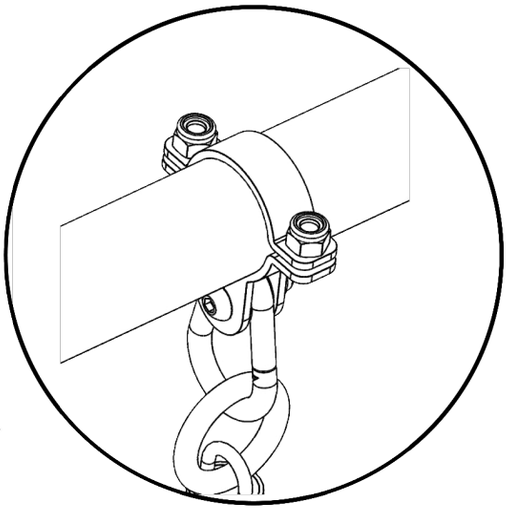

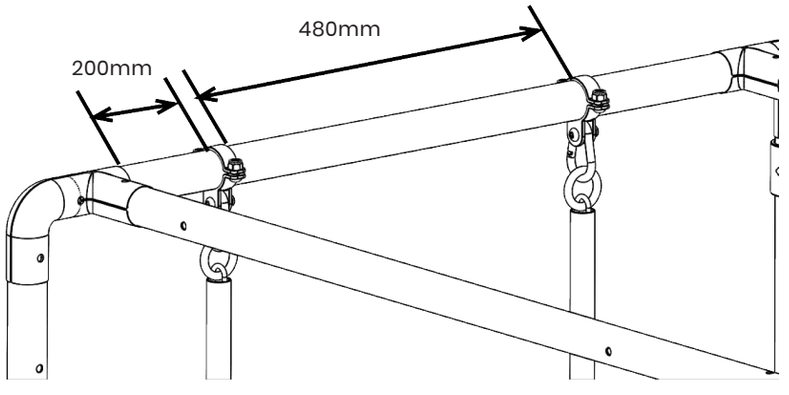

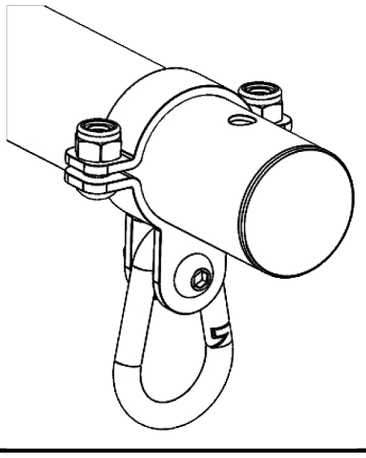


Position the hanging brackets at the distances shown. Ensure each spring hook hangs vertically before fully tightening the bolts.




G-M8x15mm x 4pcs

STEP 7

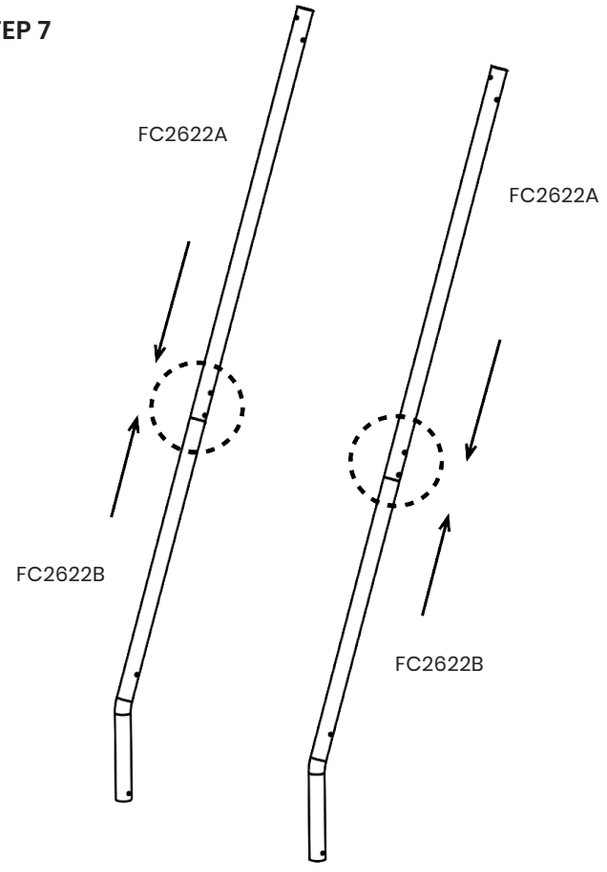


C-M8x42mm x 4pcs




IMPORTANT:
Ensure the spring washer is fitted on the nut side.

STEP 8

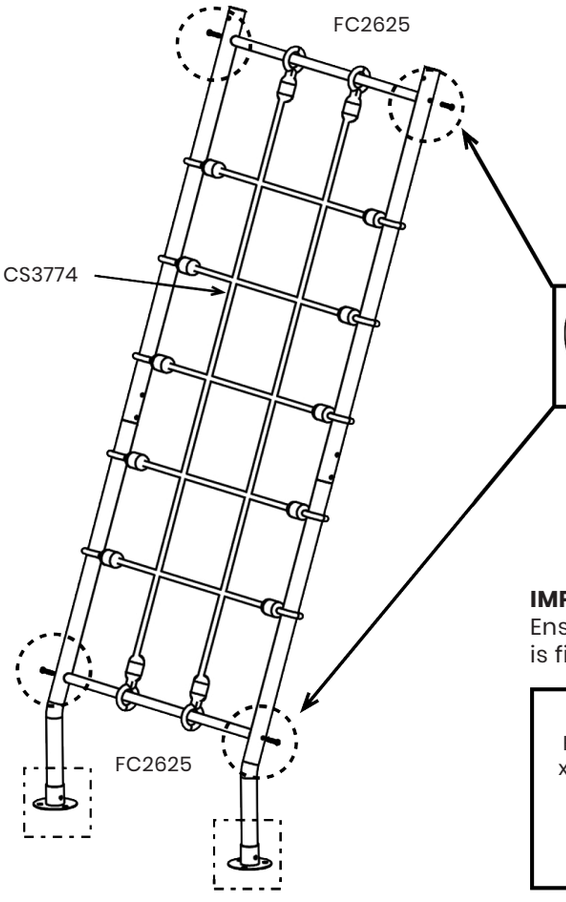


1. Slide the loops onto the beams as per the layout.
2. Tighten bolts B securely.

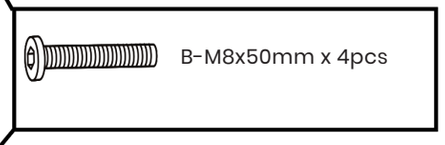


B-M8x50mm x 4pcs

IMPORTANT:
Ensure the spring washer is fitted on the nut side.

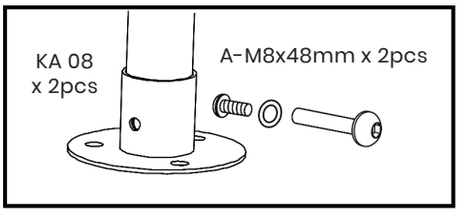


STEP 9

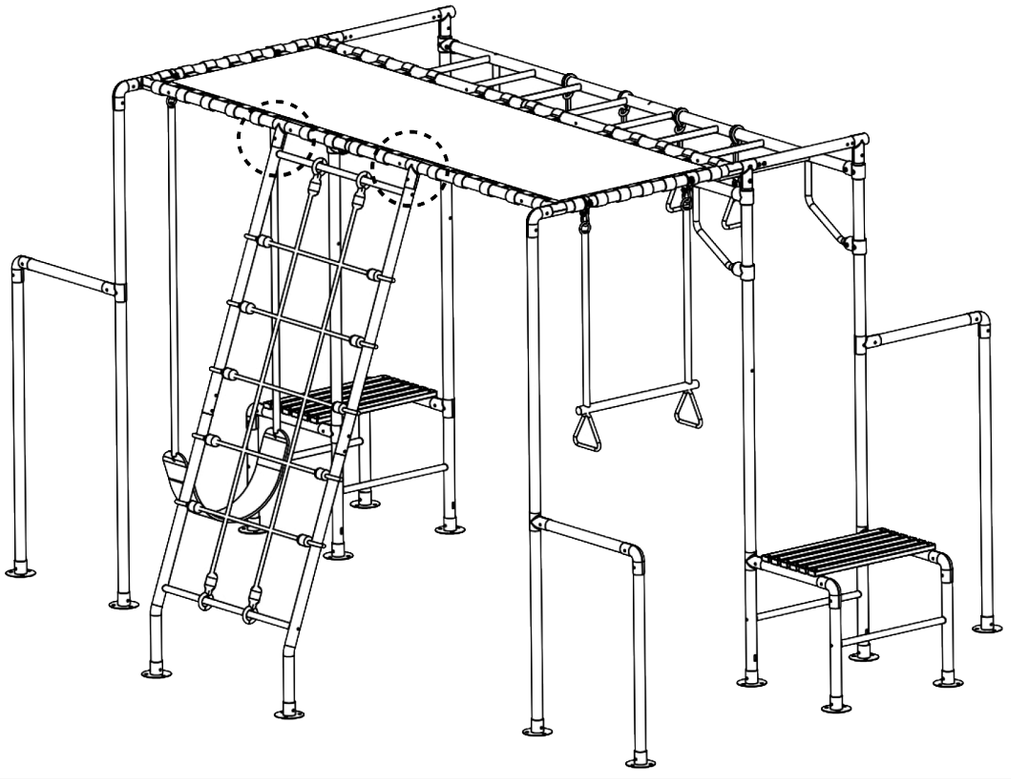


IMPORTANT:
Keep clear of this hole for next step assembly.

IMPORTANT:
No bolts required for fastening here.

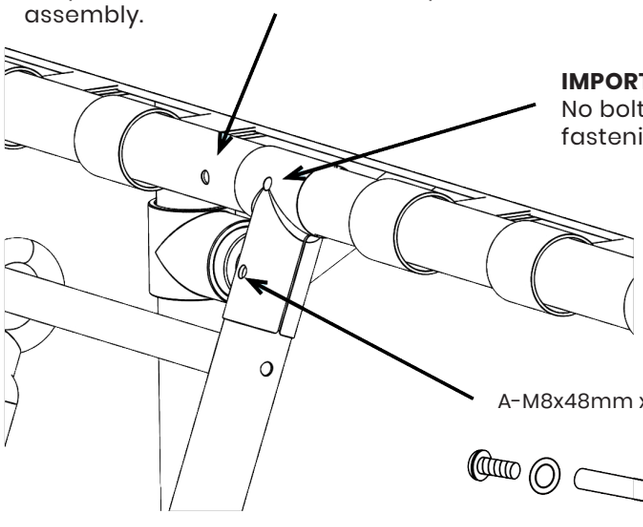


A-M8x48mm x 2pcs

IMPORTANT:
Ensure the spring washer is fitted on the nut side.

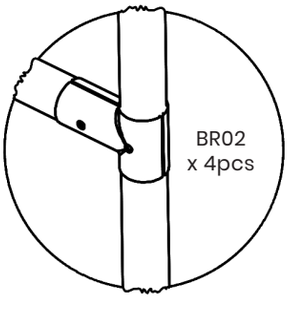



STEP 10

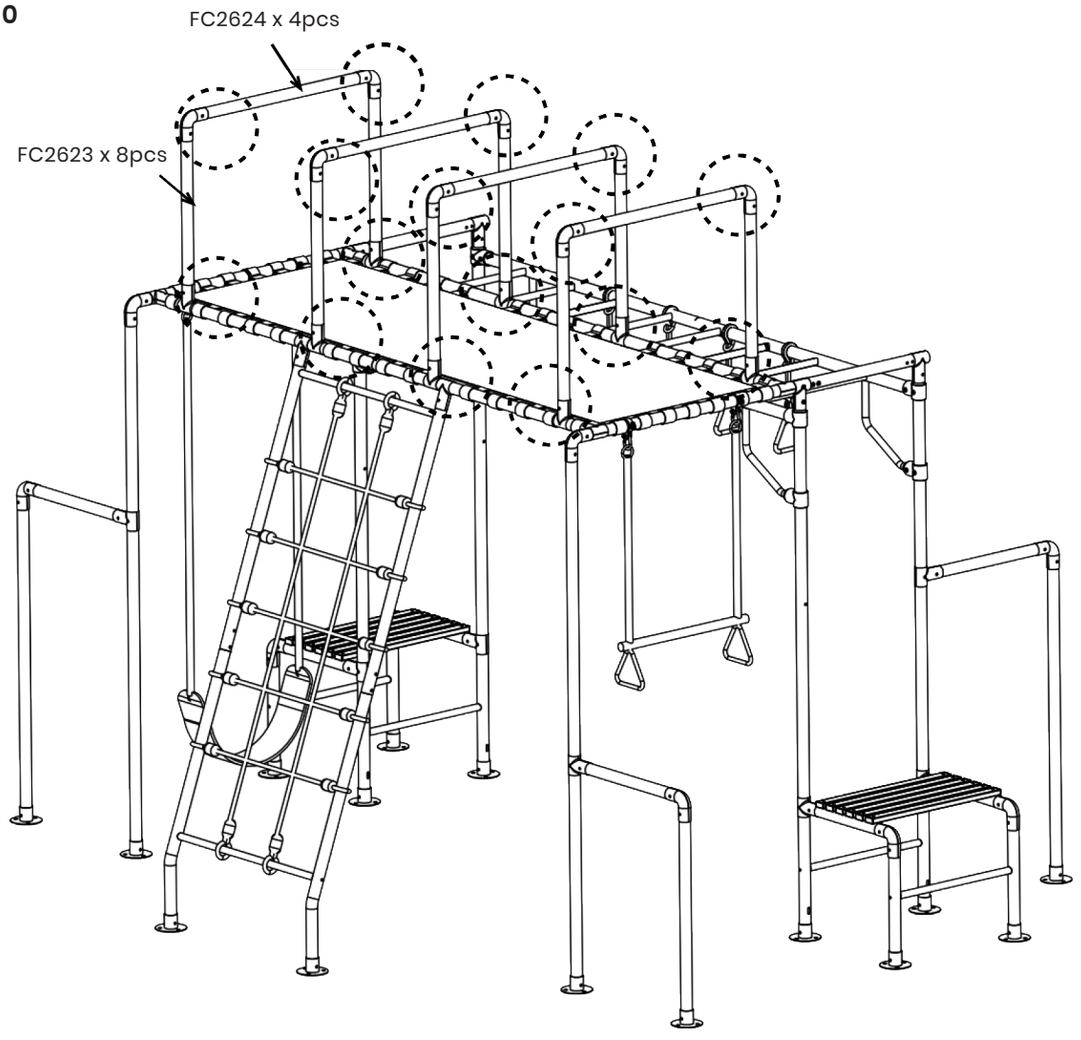


IMPORTANT:
Ensure the spring washer is fitted on the nut side.


A-M8x48mm x 32pcs



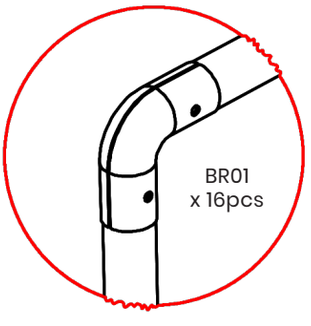

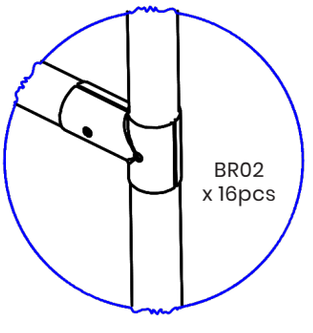



STEP 11

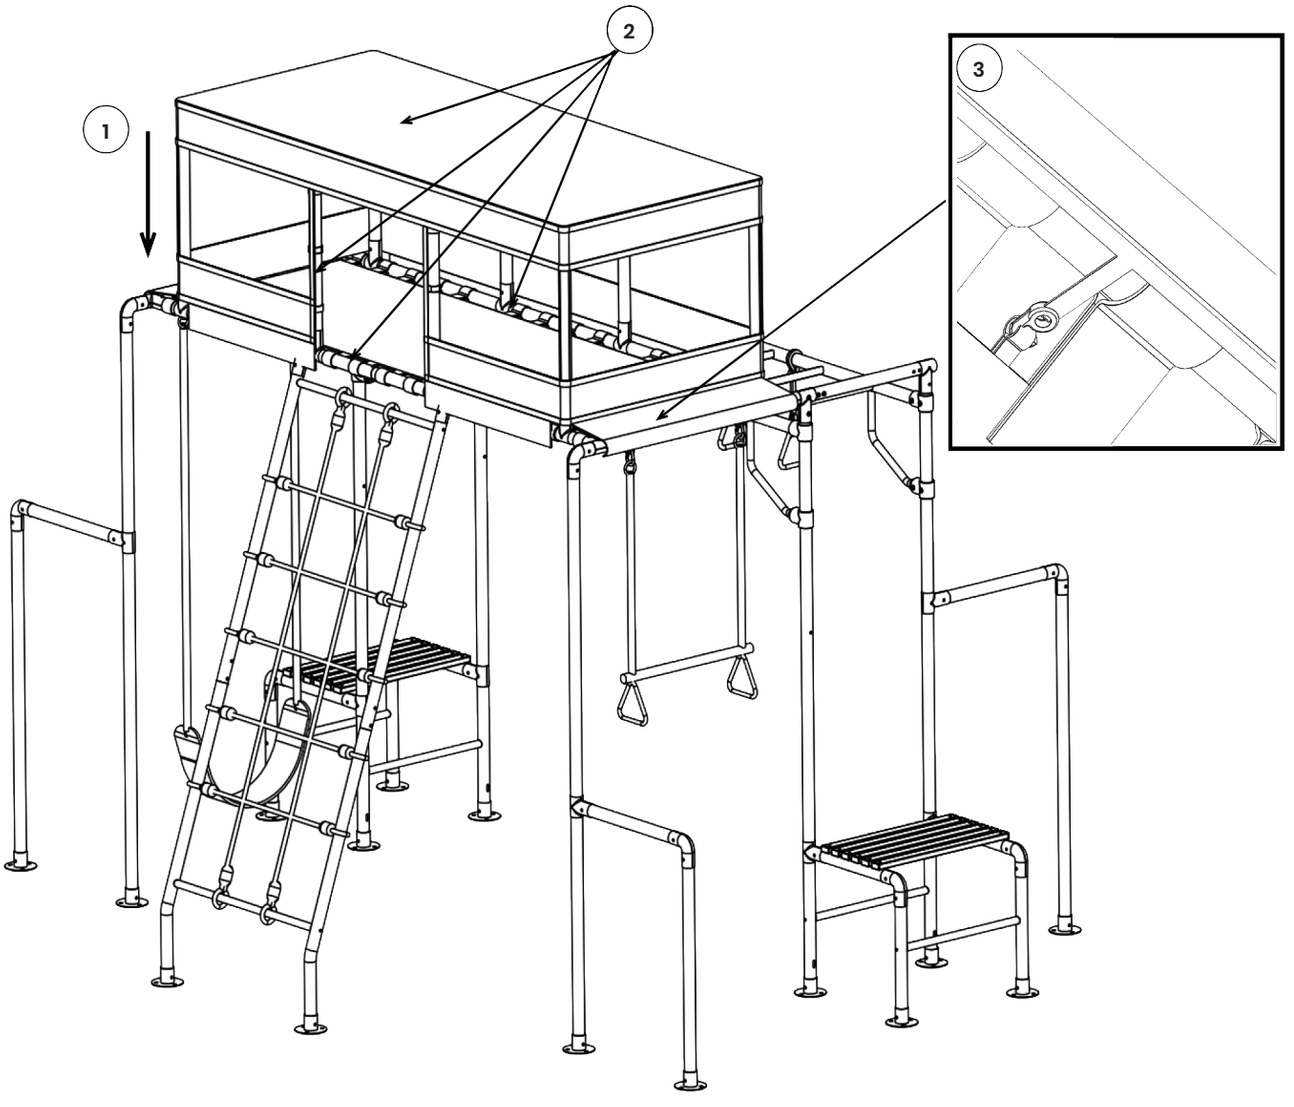

1. Fit the canopy in the orientation shown.
2. Secure all hook-and-loop straps in order.
3. Fold the skirt flap over the frame and attach the elastic hooks to the corresponding webbing loops on the platform mat.

STEP 12

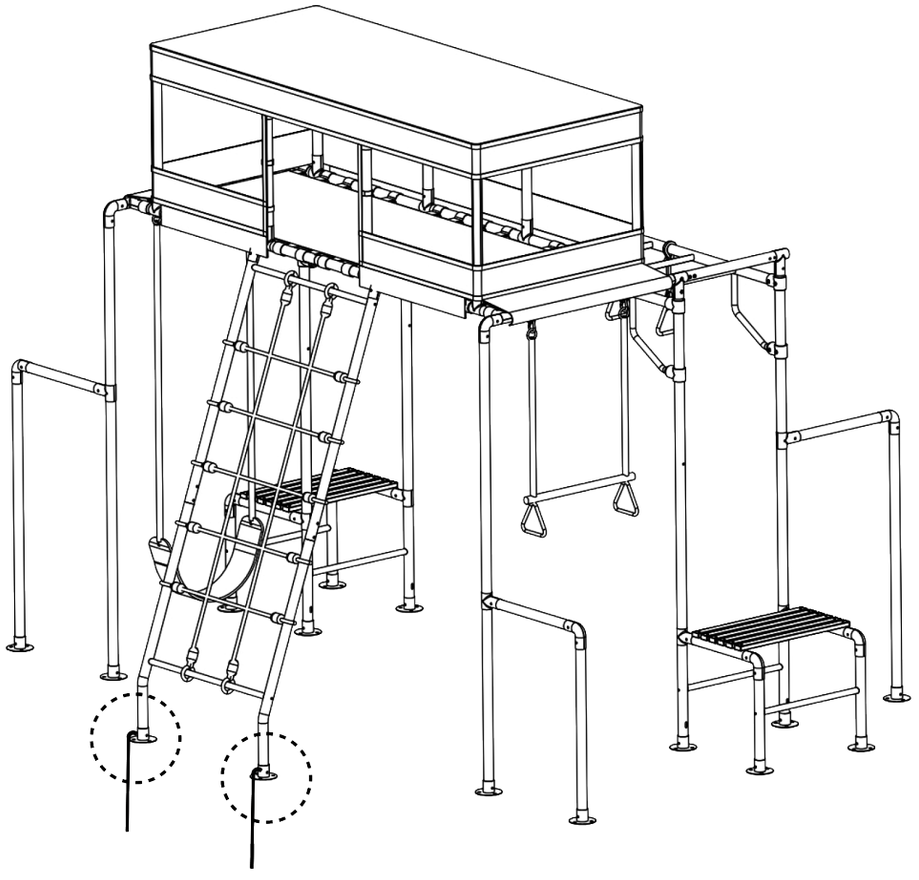

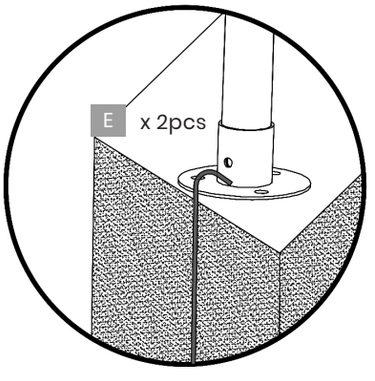


1. Position the climbing gym in its final location and check that the frame is level and stable.
2. Secure the base plates using the ground anchors (E).
3. Ensure all anchors are installed level with or below the ground surface to reduce tripping hazards.
4. Check that the spring washer is fitted on the nut side of each bolted connection.
5. **Fully tighten all bolts and fasteners before use.**


IMPORTANT:
1. The climbing gym must be securely anchored before use.
2. Install on a level surface with suitable impact-absorbing surfacing, such as sand, wood chips, rubber or other appropriate playground surfacing.
3. Do not install over concrete, asphalt or other hard surfaces.
4. Check that all handles, rope loops, anchors, base plates and frame connections are secure before each use.
5. Do not use the equipment if any component is loose, damaged or incorrectly installed.

JUNIOR JUNGLE 4.2 (LK376, LK377, LK378, LK379, LK380 & LK381)

This combination uses steps and parts from LK376, LK377, LK378, LK379 and LK380.
See contents page for LK376, LK377, LK378, LK379 and LK380 steps.

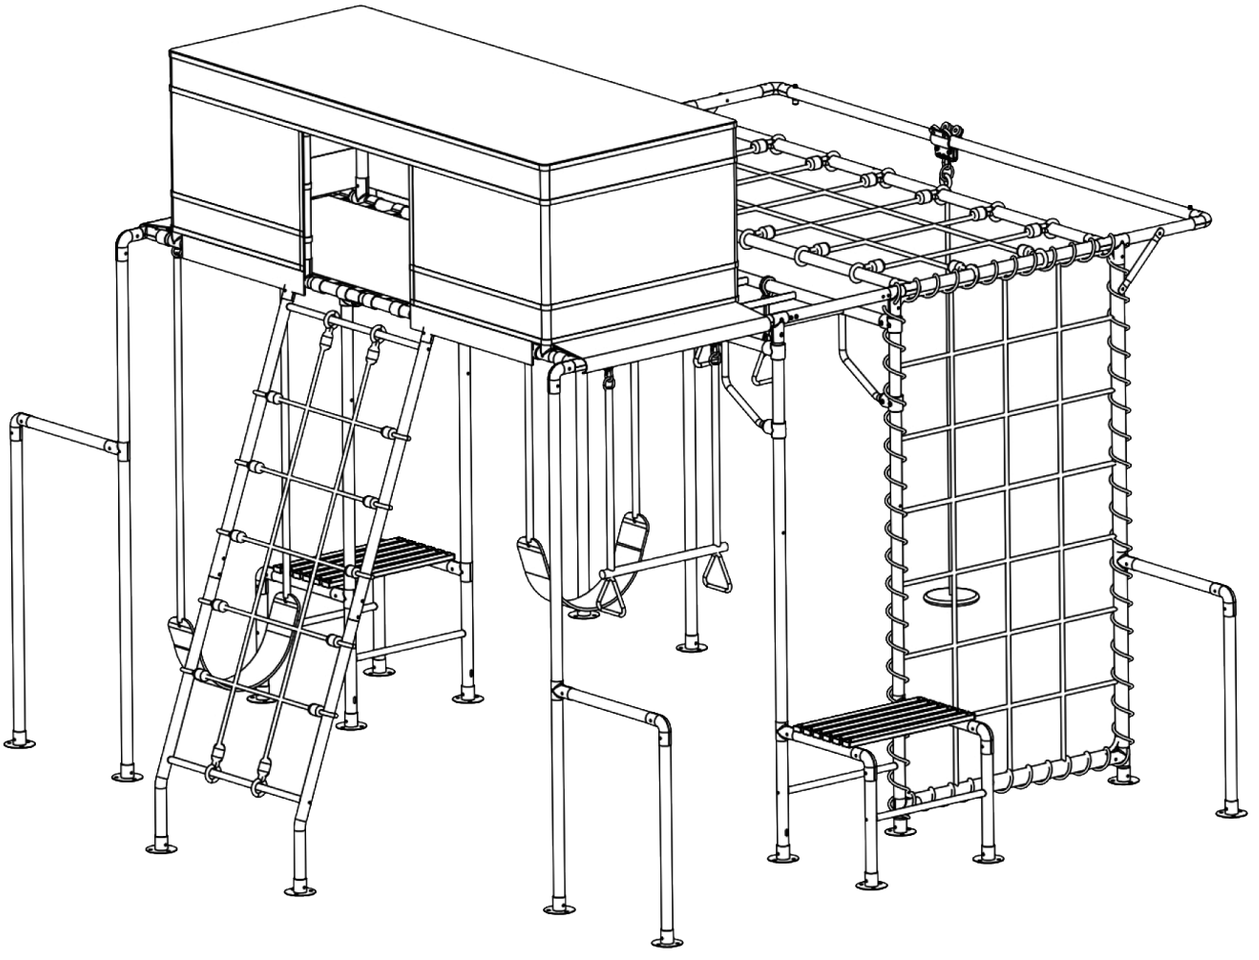



STEP 1

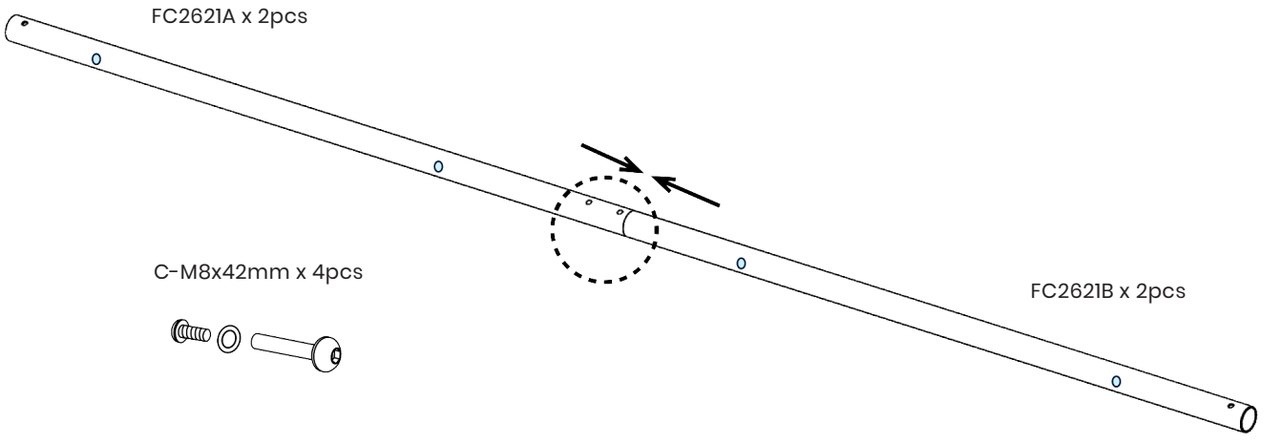


IMPORTANT:
Ensure the spring washer is fitted on the nut side.

STEP 2

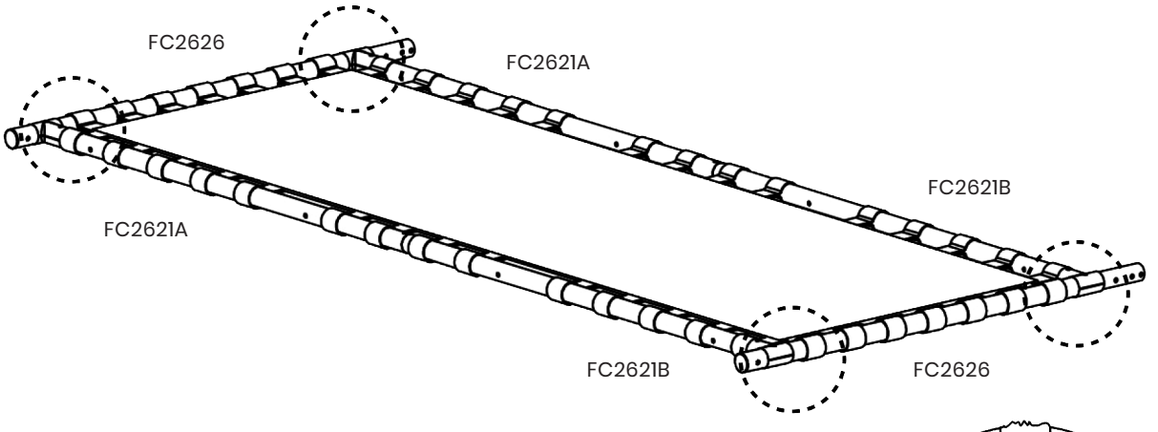

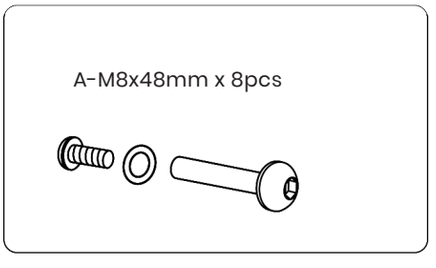


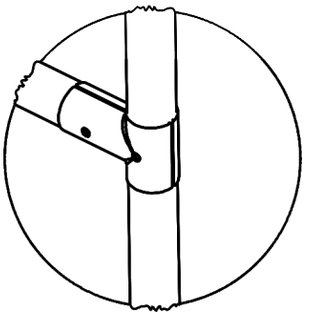

BR02 x 8pcs


IMPORTANT:
Ensure the spring washer is fitted on the nut side.

STEP 3 Refer to previous pages LK376, LK377, LK378 and LK379 steps before installing the frame.

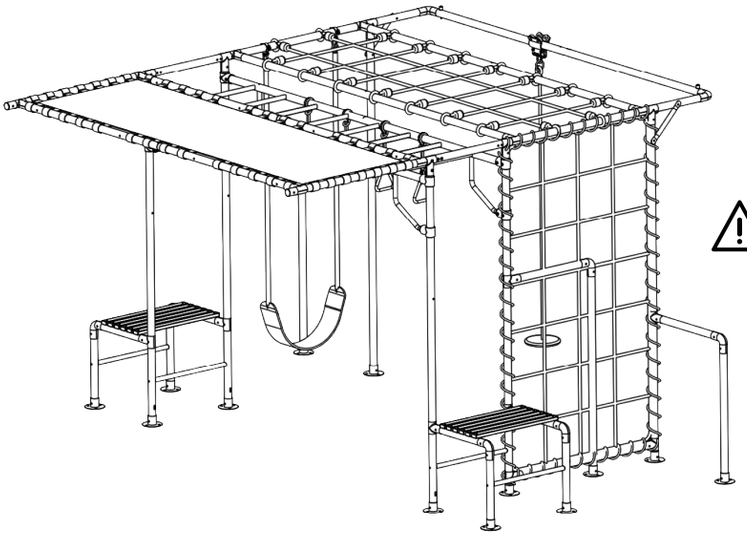


WARNING:
Two adults are required for assembly.


1. Remove this bolt for the next assembly step.

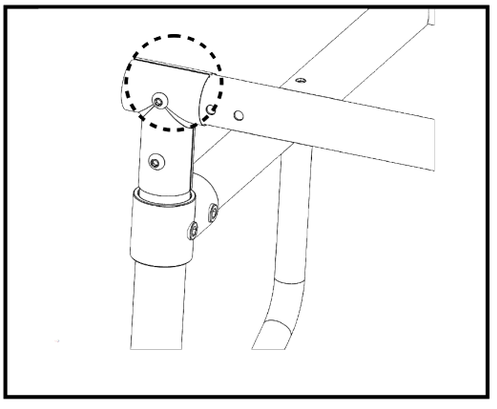


2. Insert the swaged end into FC2610.

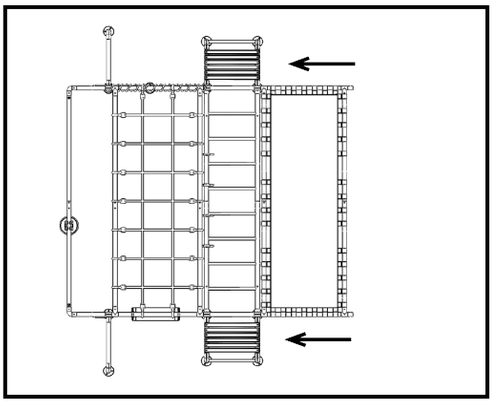

3. Refit the removed bolt and install the remaining A bolts at both ends.

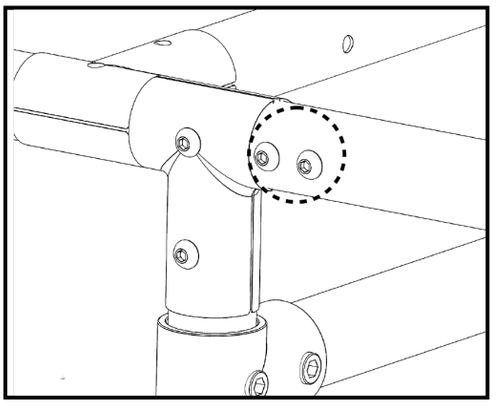


A-M8x42mm x 4pcs





IMPORTANT:
Ensure the spring washer is fitted on the nut side.


STEP 4

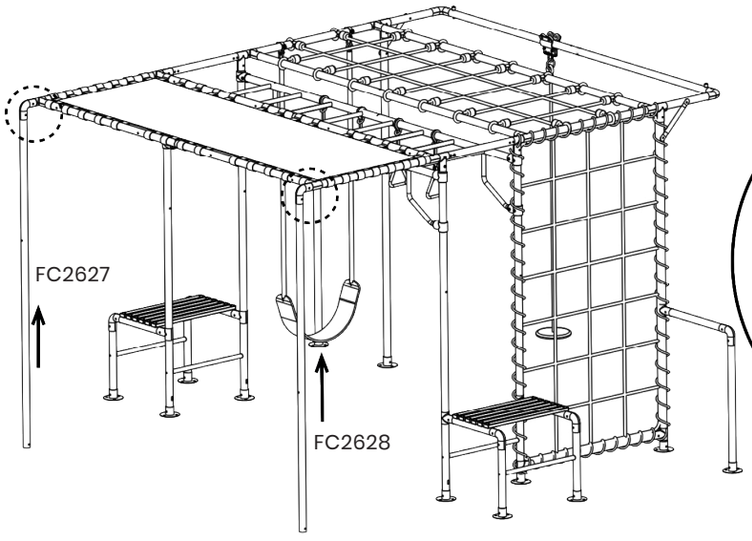

Pole Direction

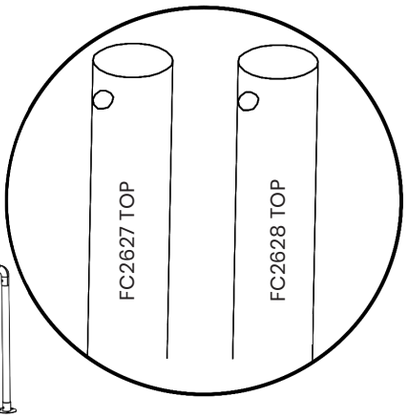


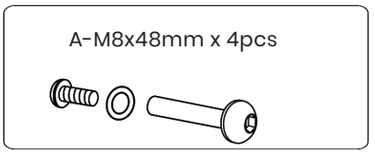






IMPORTANT:
Ensure the spring washer is fitted on the nut side.


STEP 5

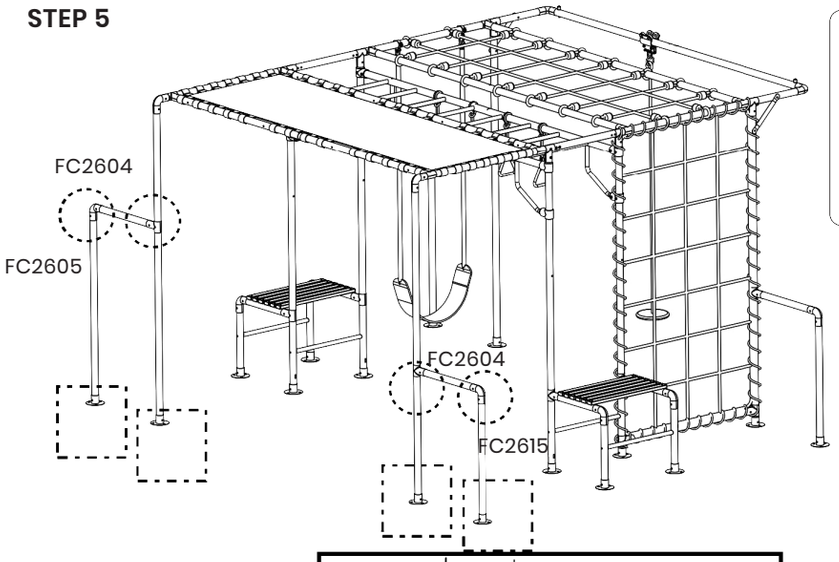

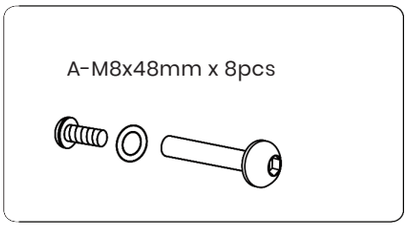



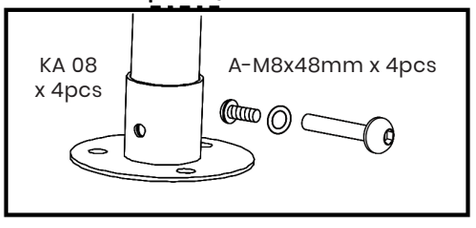






IMPORTANT:
Ensure the spring washer is fitted on the nut side.


STEP 6

Install the swing seat and trapeze bar

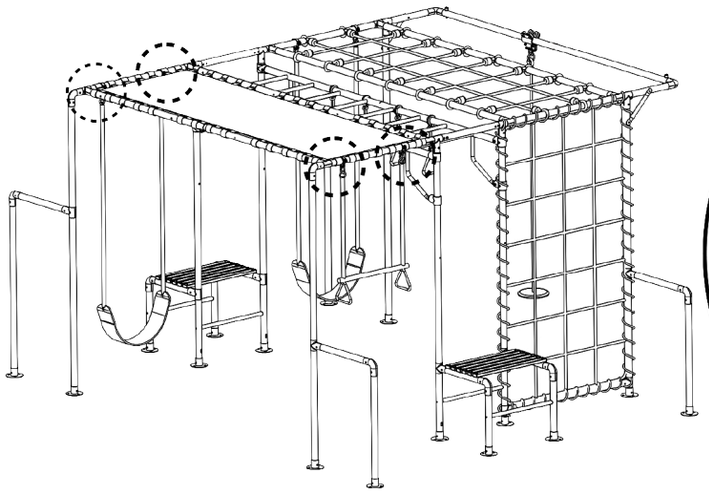

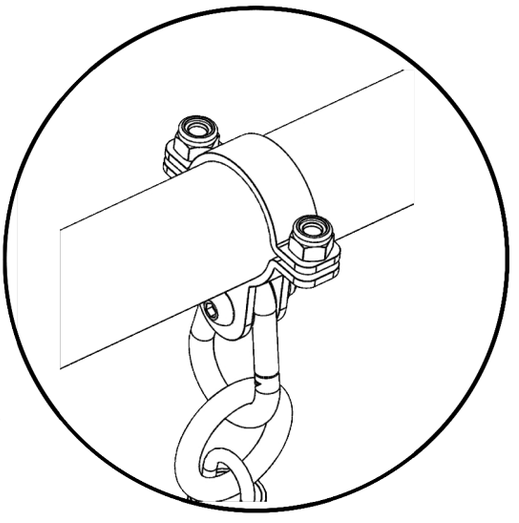

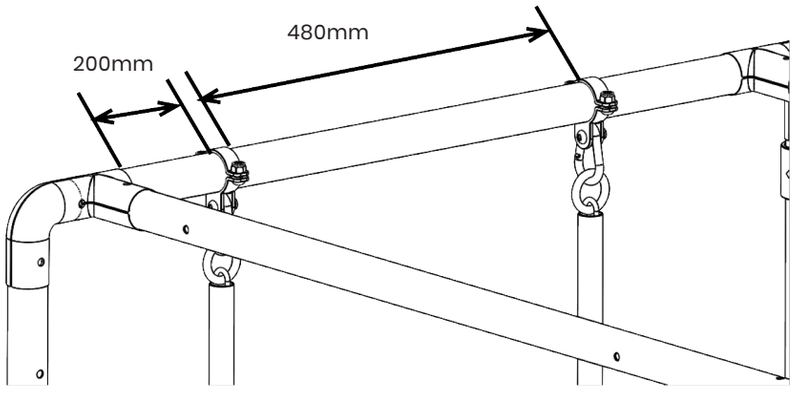

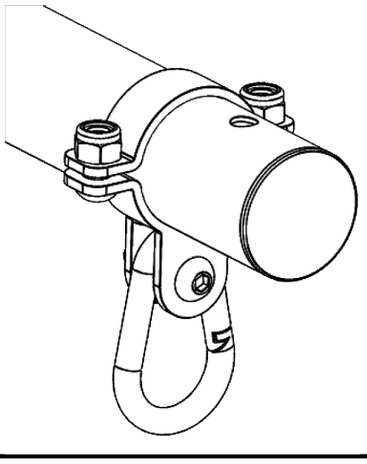


Position the hanging brackets at the distances shown. Ensure each spring hook hangs vertically before fully tightening the bolts.




G-M8x15mm x 4pcs

STEP 7

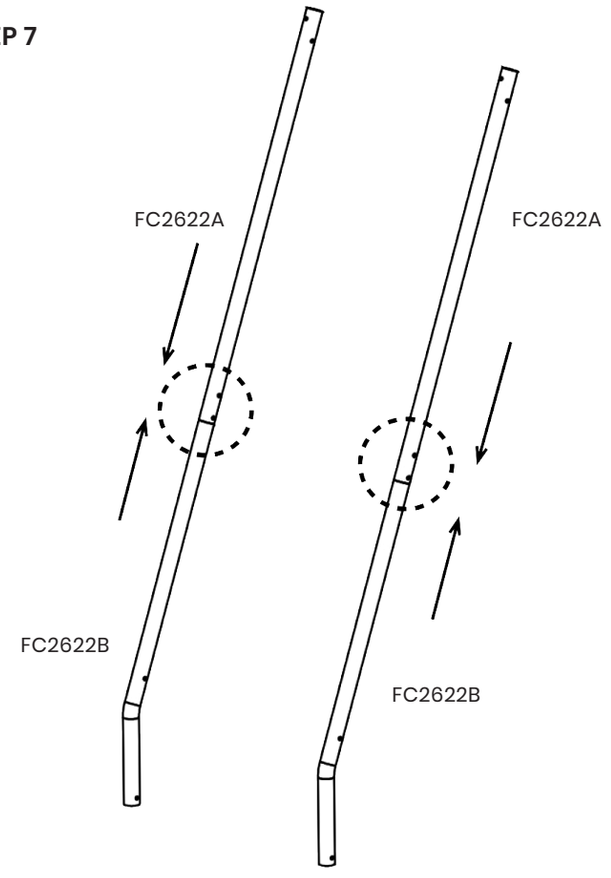


C-M8x42mm x 4pcs




IMPORTANT:
Ensure the spring washer is fitted on the nut side.


STEP 8

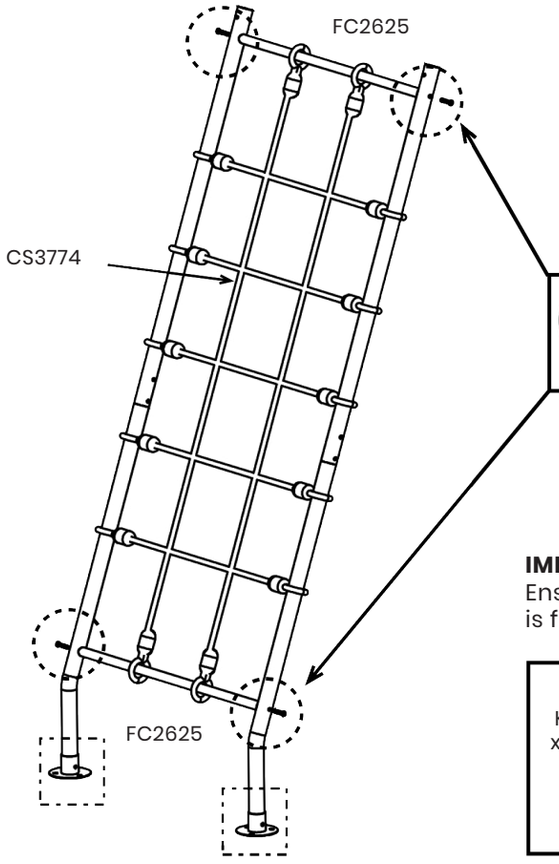


1. Slide the loops onto the beams as per the layout.
2. Tighten bolts B securely.

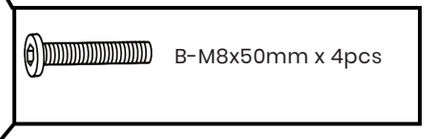


IMPORTANT:
Ensure the spring washer is fitted on the nut side.

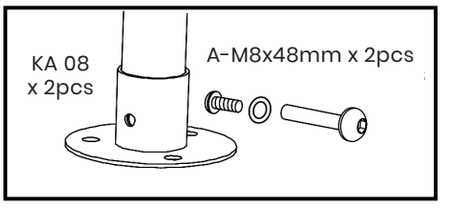

STEP 9

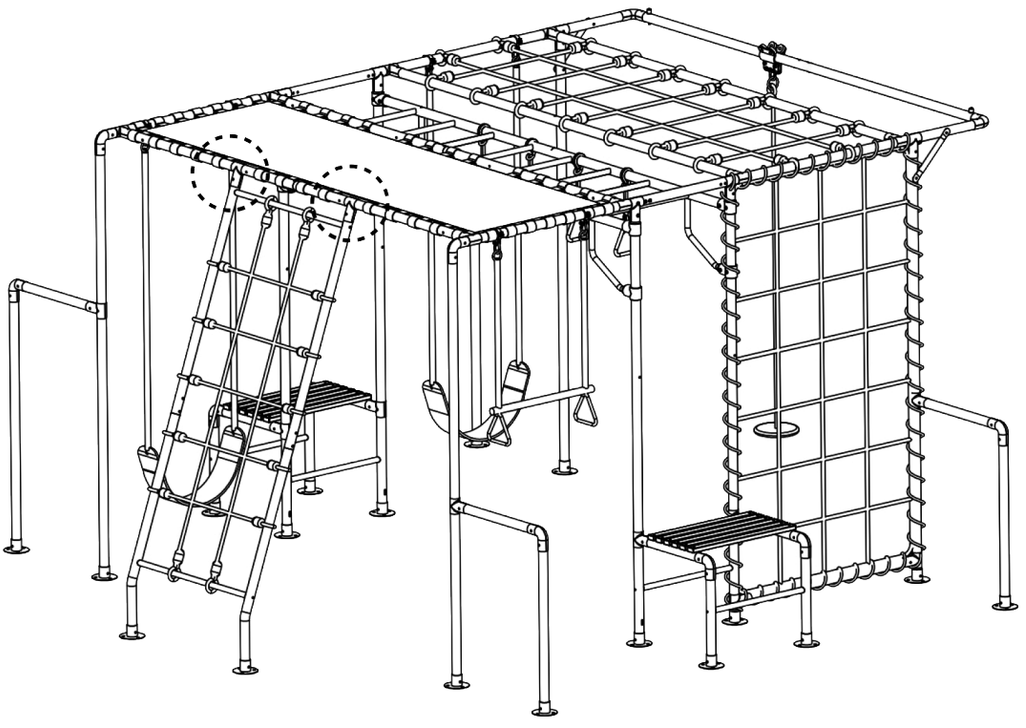


IMPORTANT:
Keep clear of this hole for next step assembly.

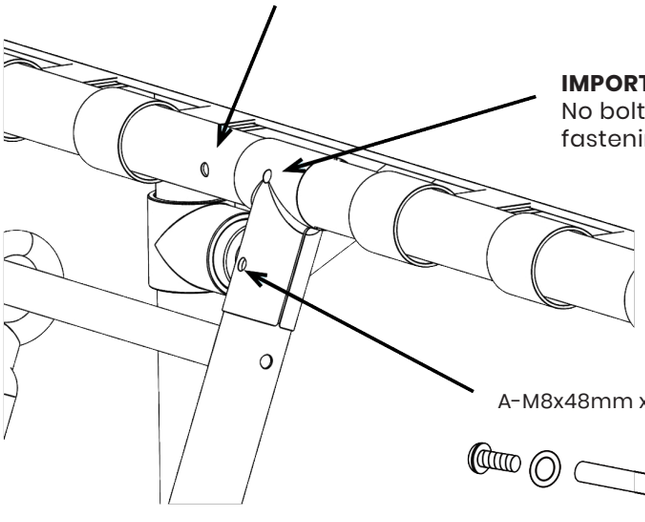


IMPORTANT:
No bolts required for fastening here.

A-M8x48mm x 2pcs

IMPORTANT:
Ensure the spring washer is fitted on the nut side.





STEP 10

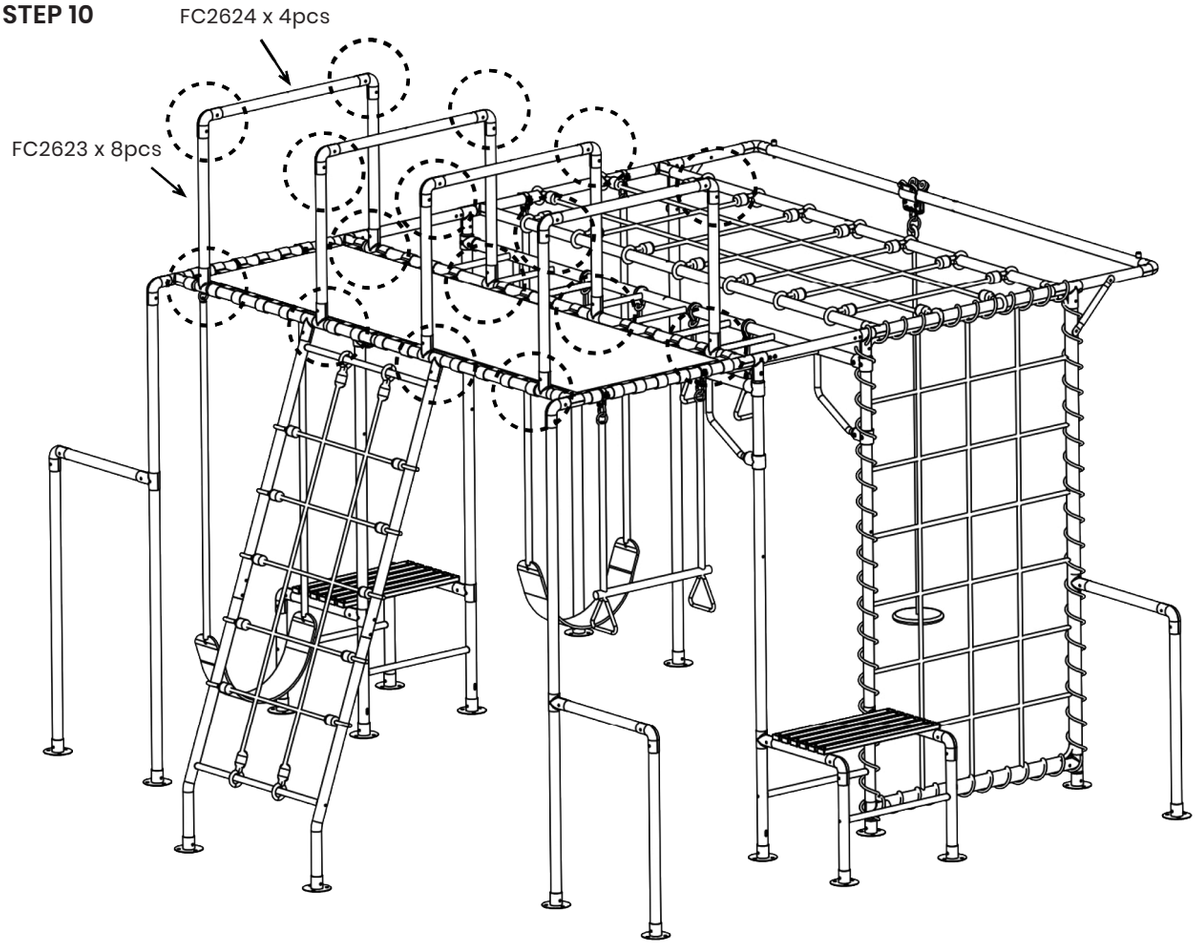


IMPORTANT:
Ensure the spring washer is fitted on the nut side.


A-M8x48mm x 32pcs



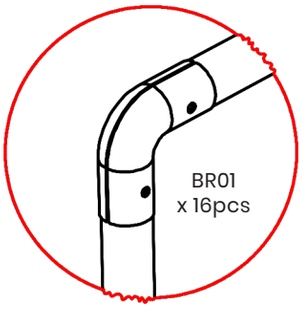

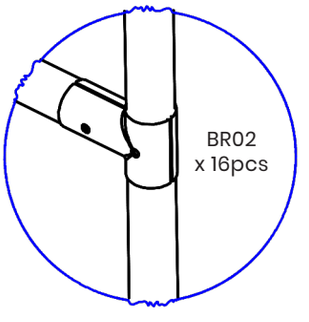



STEP 11

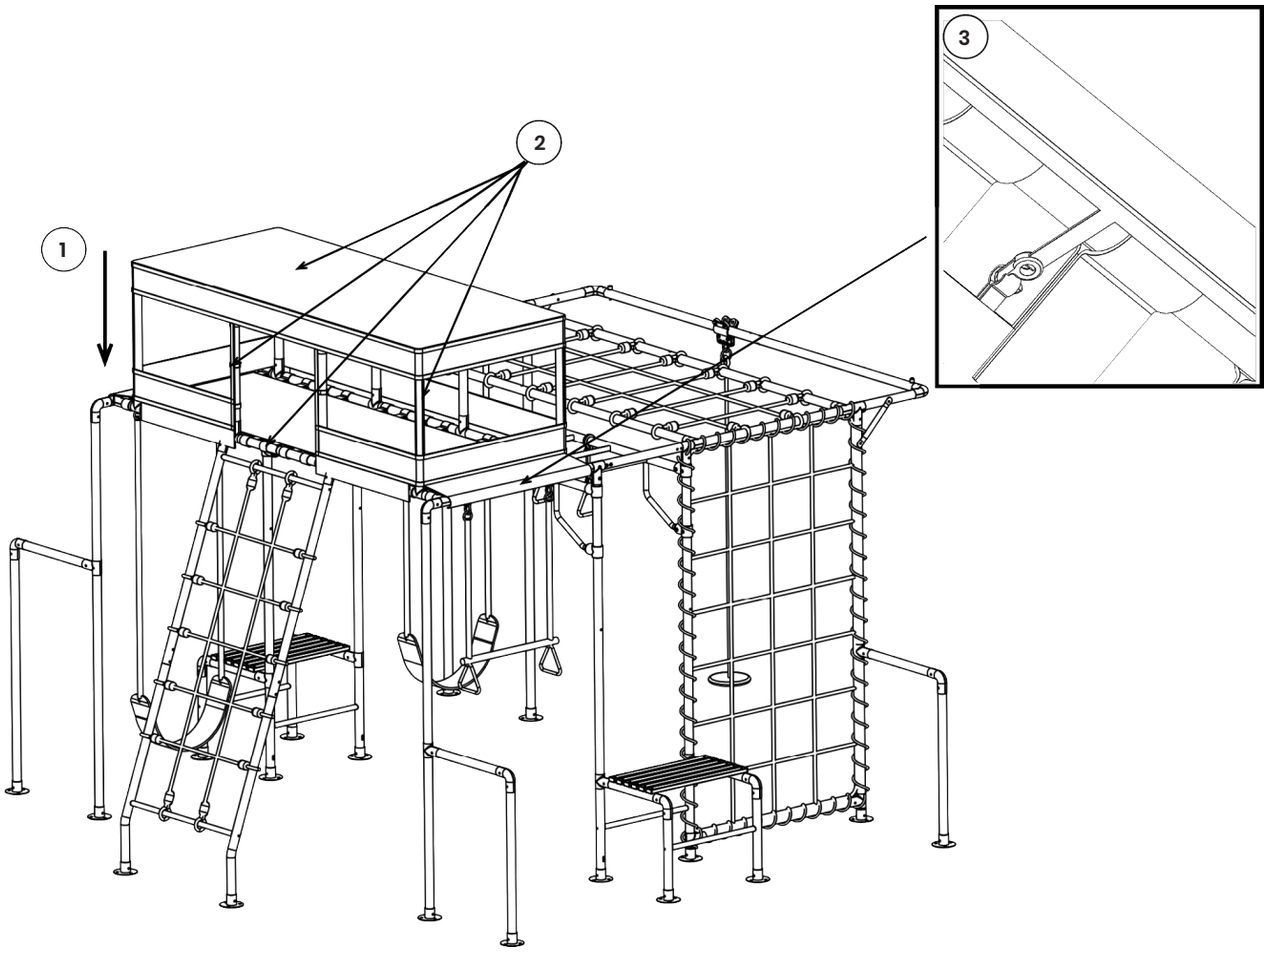

1. Fit the canopy in the orientation shown.
2. Secure all hook-and-loop straps in order.
3. Fold the skirt flap over the frame and attach the elastic hooks to the corresponding webbing loops on the platform mat.

STEP 12

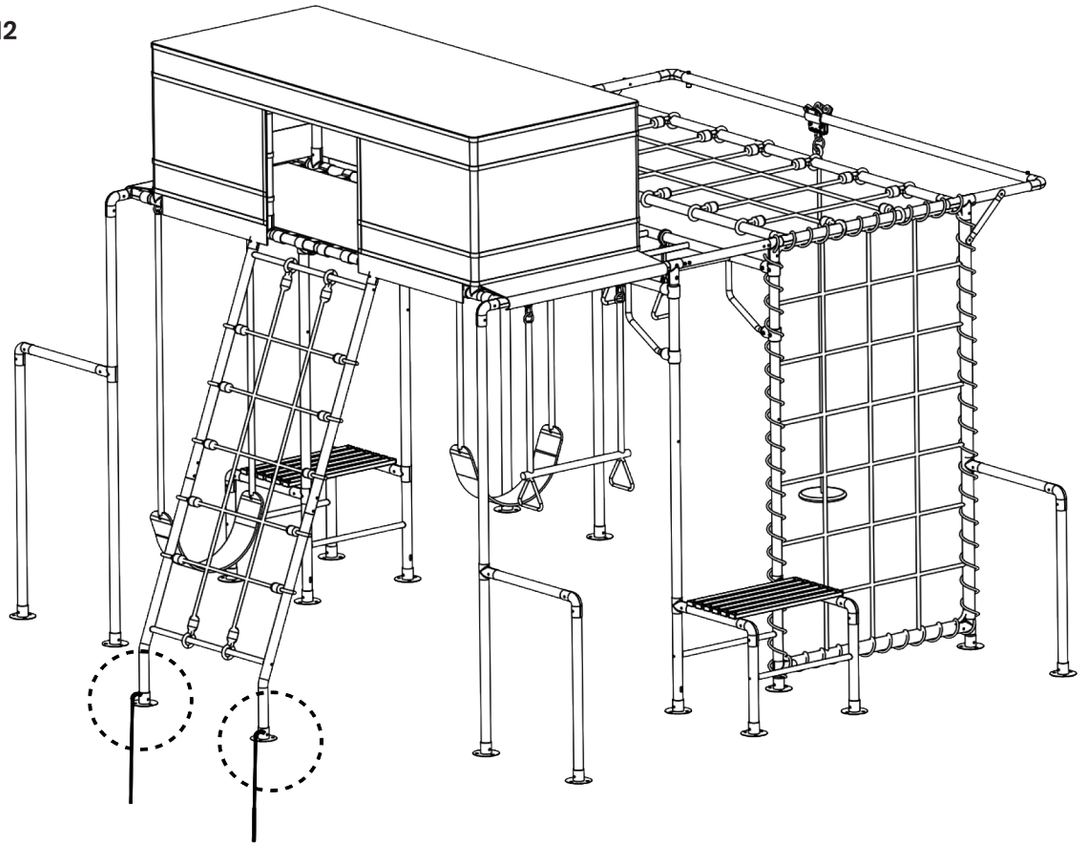

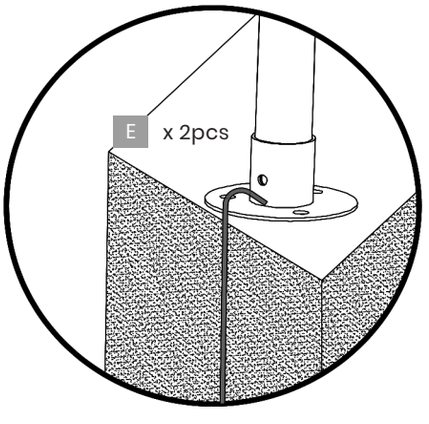


1. Position the climbing gym in its final location and check that the frame is level and stable.
2. Secure the base plates using the ground anchors (E).
3. Ensure all anchors are installed level with or below the ground surface to reduce tripping hazards.
4. Check that the spring washer is fitted on the nut side of each bolted connection.
5. **Fully tighten all bolts and fasteners before use.**

IMPORTANT:


1. The climbing gym must be securely anchored before use.
2. Install on a level surface with suitable impact-absorbing surfacing, such as sand, wood chips, rubber or other appropriate playground surfacing.
3. Do not install over concrete, asphalt or other hard surfaces.
4. Check that all handles, rope loops, anchors, base plates and frame connections are secure before each use.
5. Do not use the equipment if any component is loose, damaged or incorrectly installed.

JUNIOR JUNGLE 4.1 (LK376, LK377, LK380 & LK381)

This combination uses steps and parts from LK376, LK377 and LK380.
See contents page for LK376, LK377 and LK380 steps

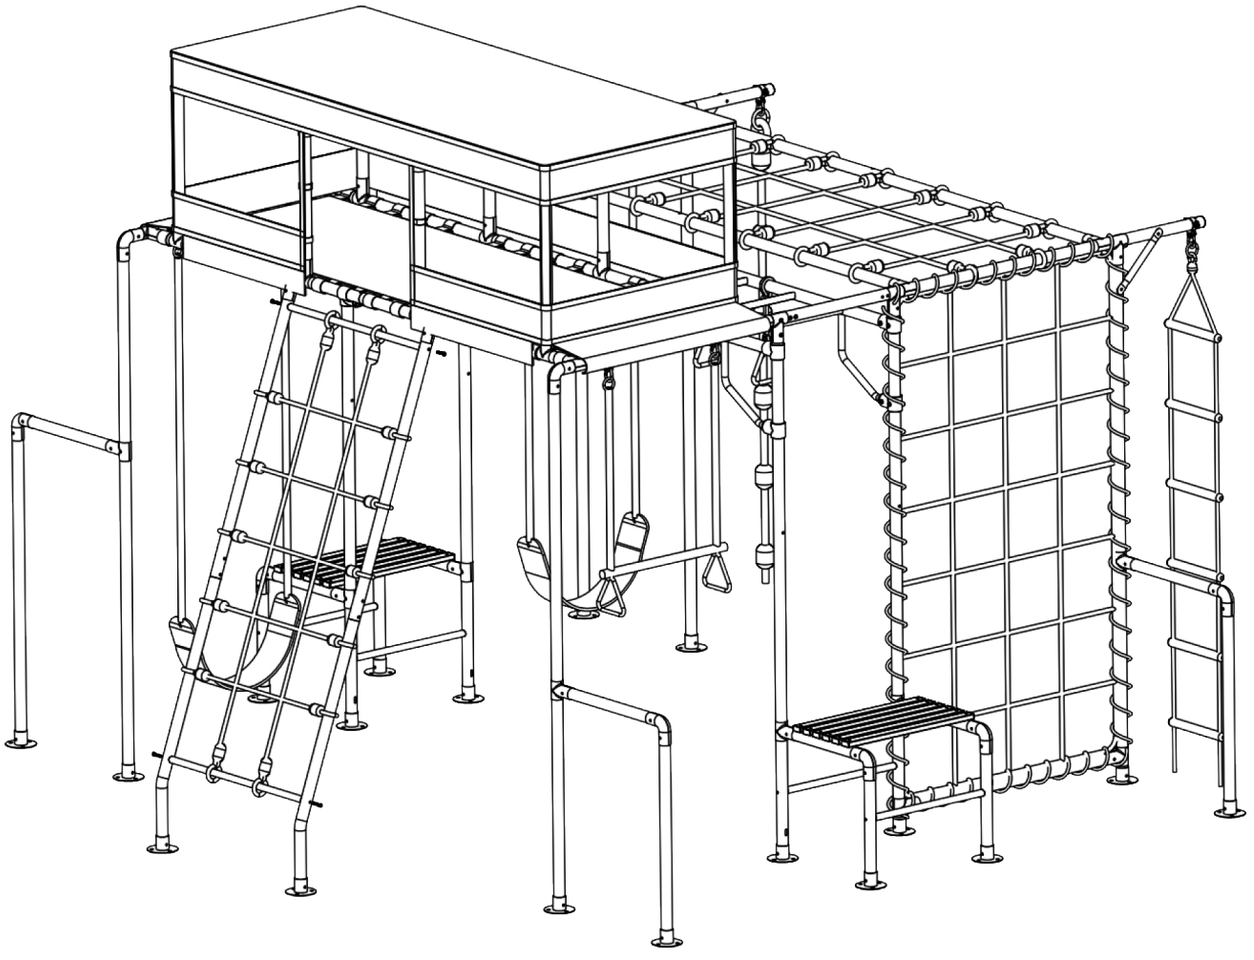


STEP 1

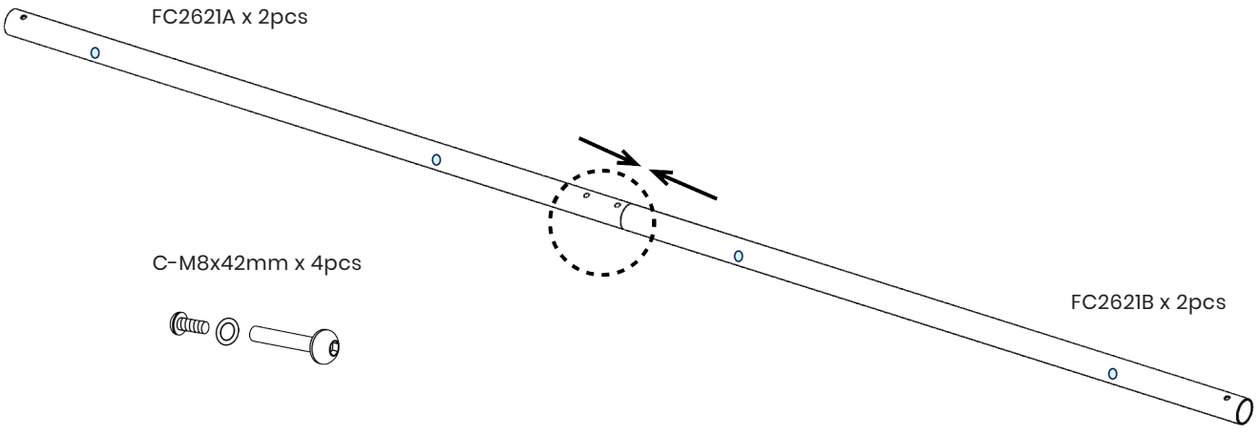



IMPORTANT:
Ensure the spring washer is fitted on the nut side.

STEP 2

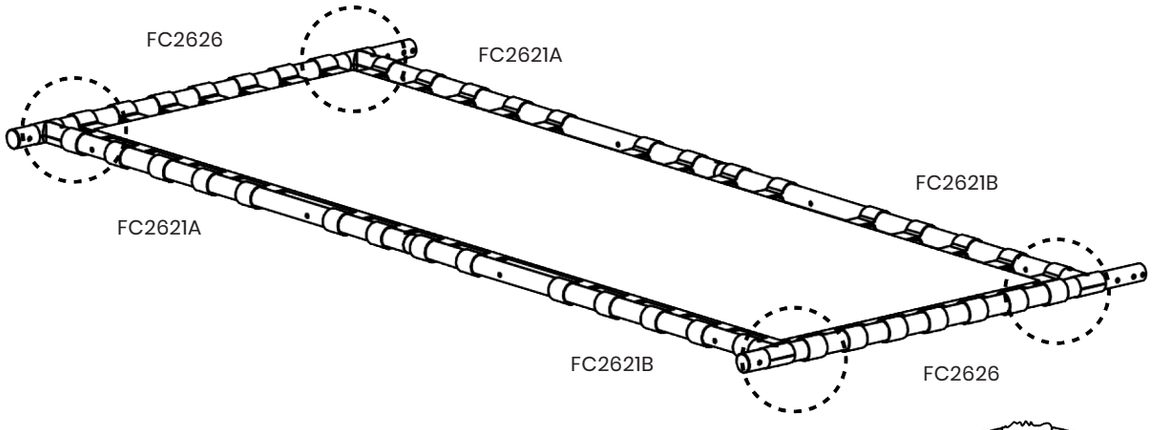


IMPORTANT:
Ensure the spring washer is fitted on the nut side.

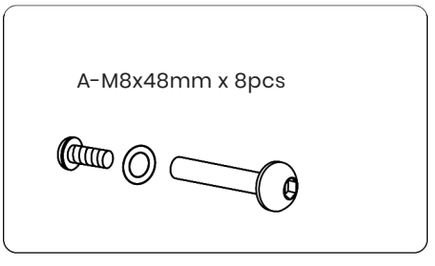




STEP 3 Refer to previous pages LK376 and LK377 steps before installing the frame.

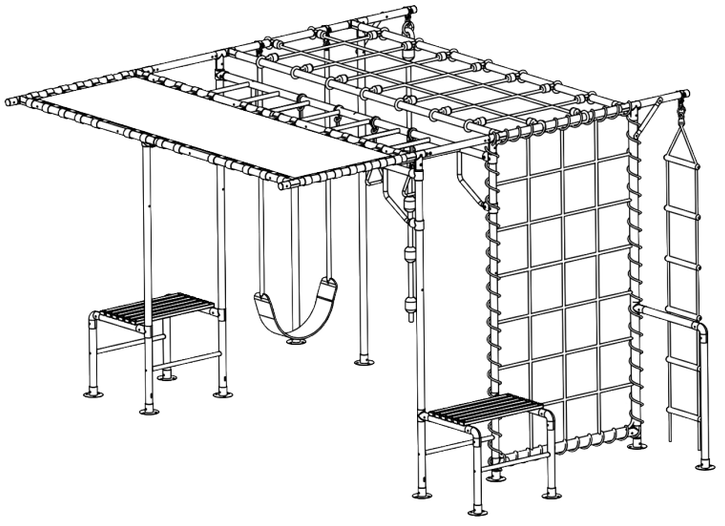


WARNING:
Two adults are required for assembly.


1. Remove this bolt for the next assembly step.

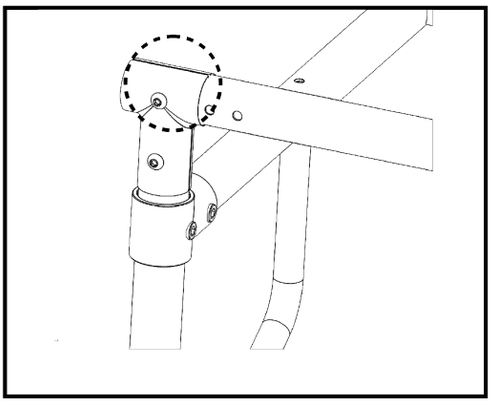


2. Insert the swaged end into FC2610.

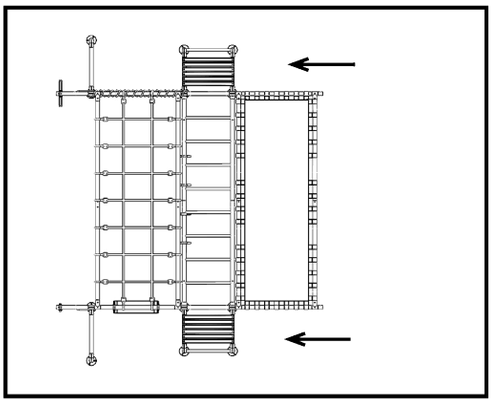

3. Refit the removed bolt and install the remaining A bolts at both ends.

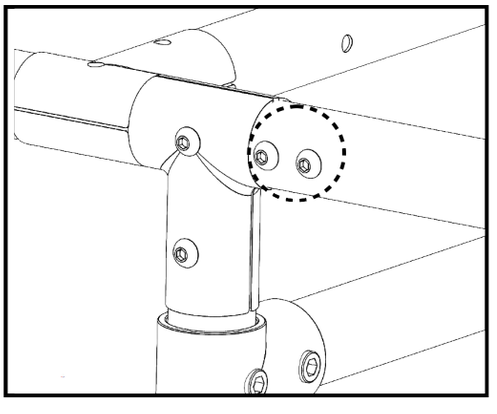


A-M8x42mm x 4pcs





IMPORTANT:
Ensure the spring washer is fitted on the nut side.


STEP 4

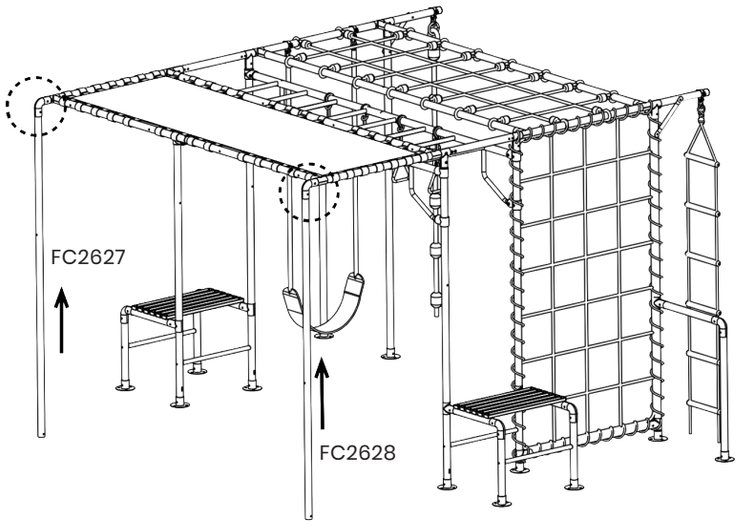

Pole Direction

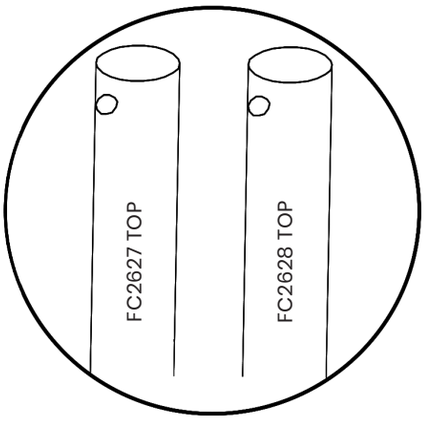


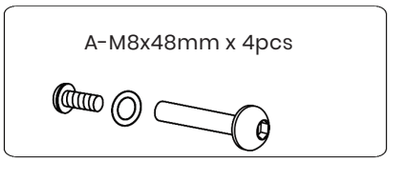






IMPORTANT:
Ensure the spring washer is fitted on the nut side.


STEP 5

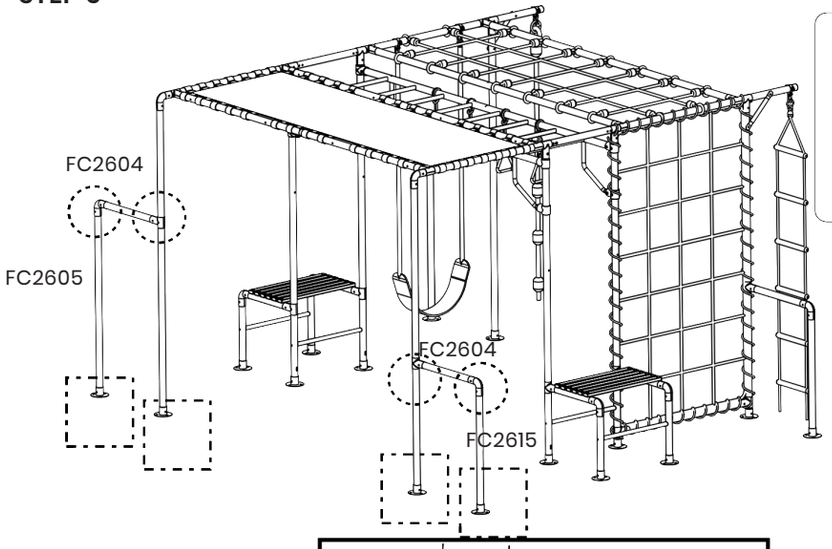

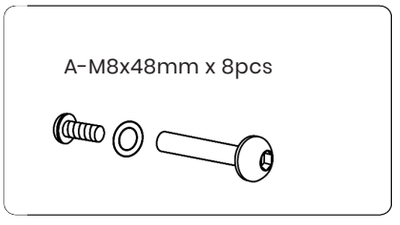



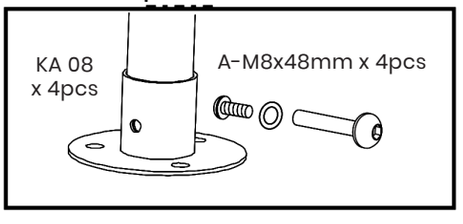






IMPORTANT:
Ensure the spring washer is fitted on the nut side.

STEP 6

Install the swing seat and trapeze bar

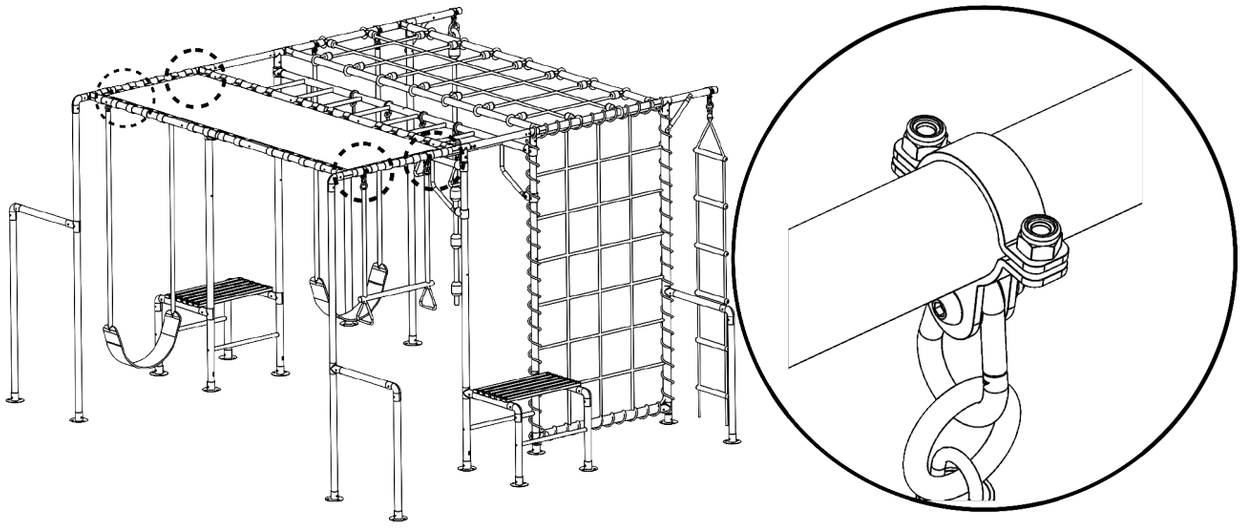

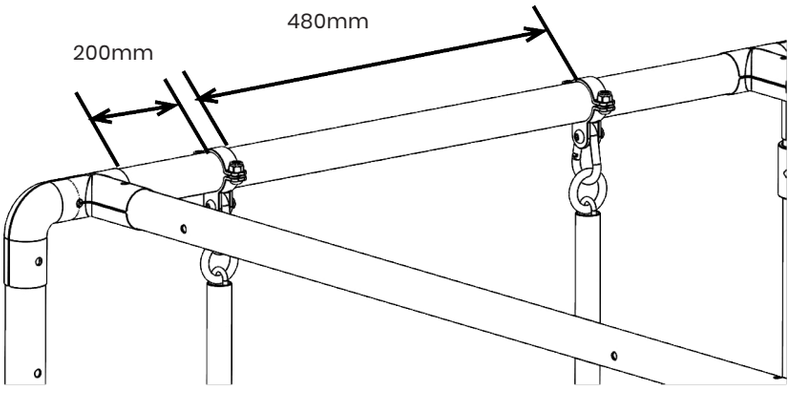

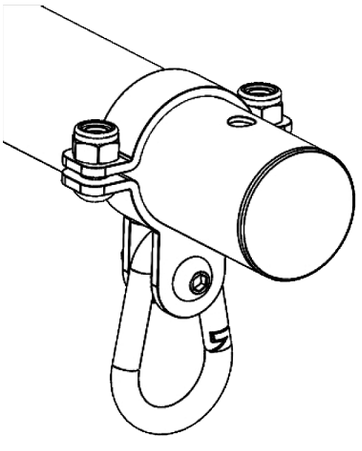


Position the hanging brackets at the distances shown. Ensure each spring hook hangs vertically before fully tightening the bolts.




G-M8x15mm x 4pcs

STEP 7

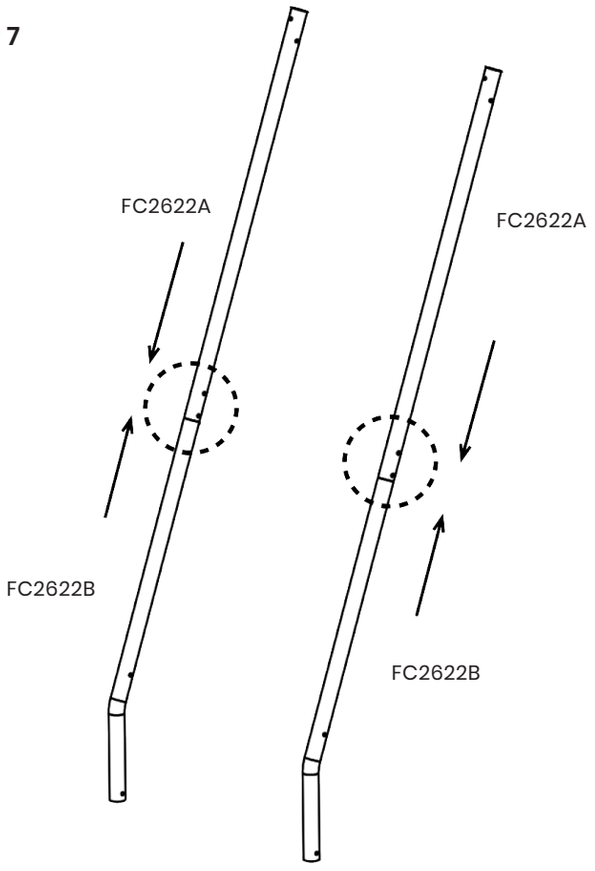


C-M8x42mm x 4pcs



IMPORTANT:
Ensure the spring washer is fitted on the nut side.

STEP 8

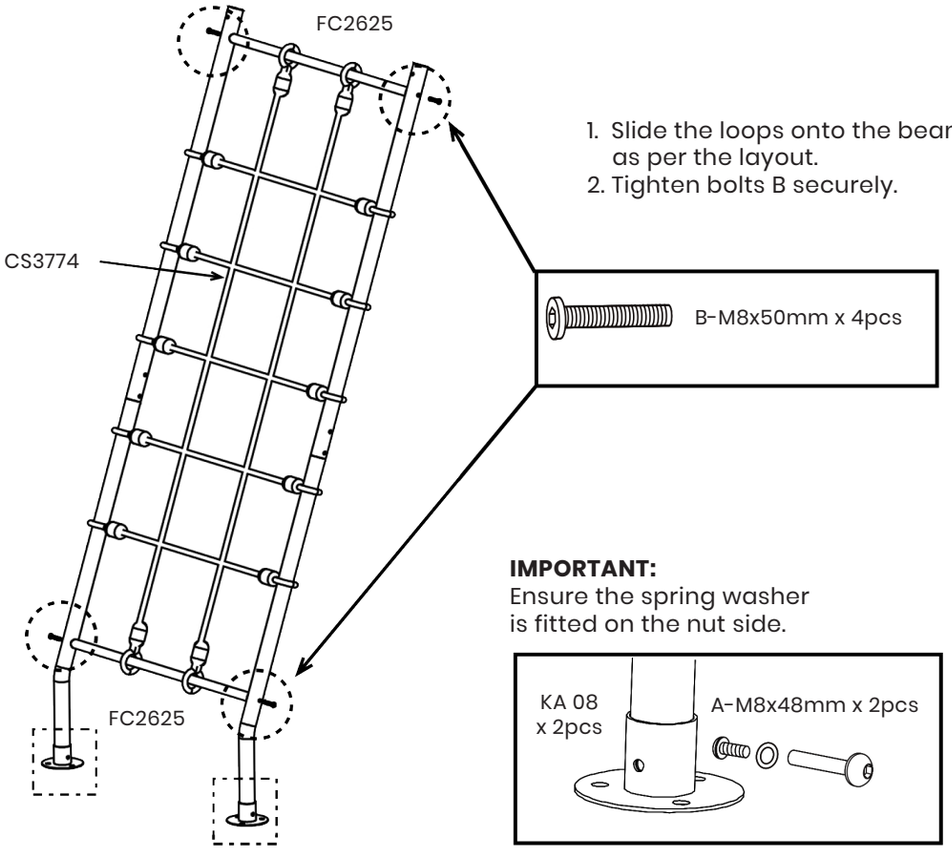

1. Slide the loops onto the beams as per the layout.
2. Tighten bolts B securely.


B-M8x50mm x 4pcs

IMPORTANT:
Ensure the spring washer is fitted on the nut side.


KA 08
x 2pcs

A-M8x48mm x 2pcs

STEP 9

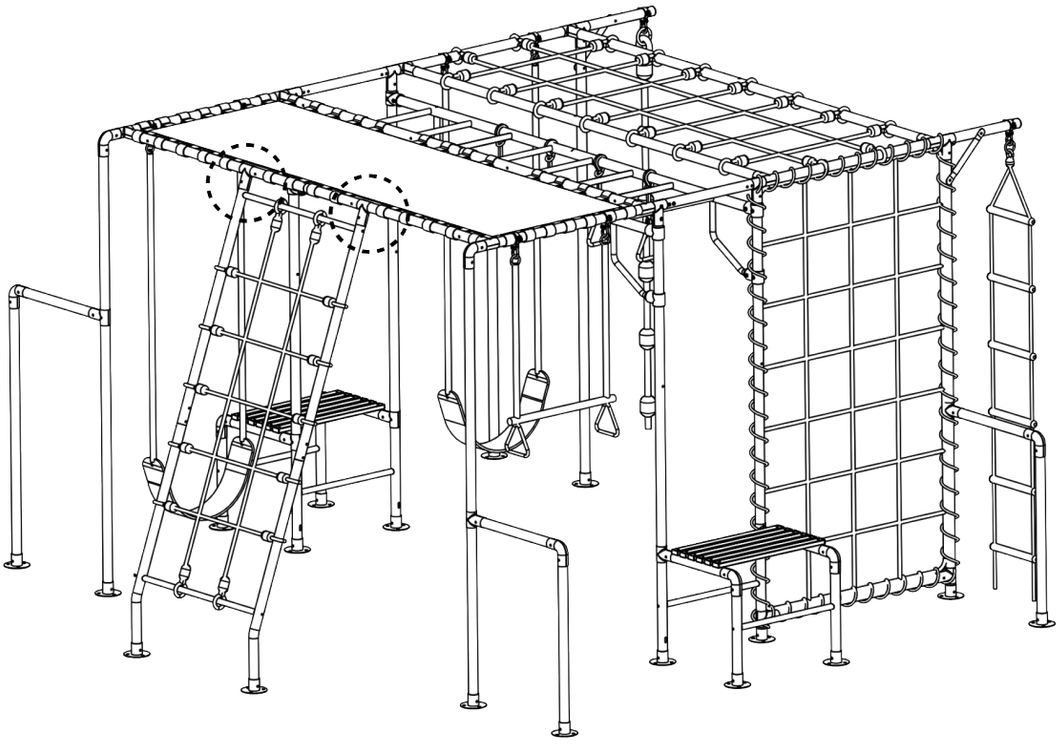


IMPORTANT:
Keep clear of this hole for next step assembly.

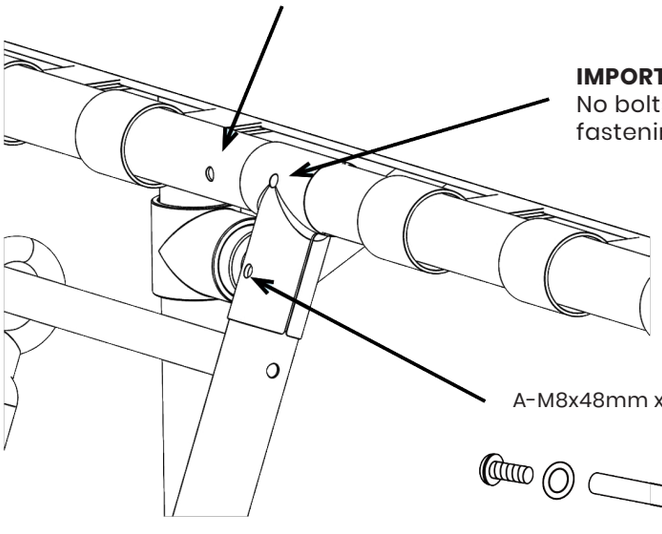


IMPORTANT:
No bolts required for fastening here.

A-M8x48mm x 2pcs

IMPORTANT:
Ensure the spring washer is fitted on the nut side.





STEP 10

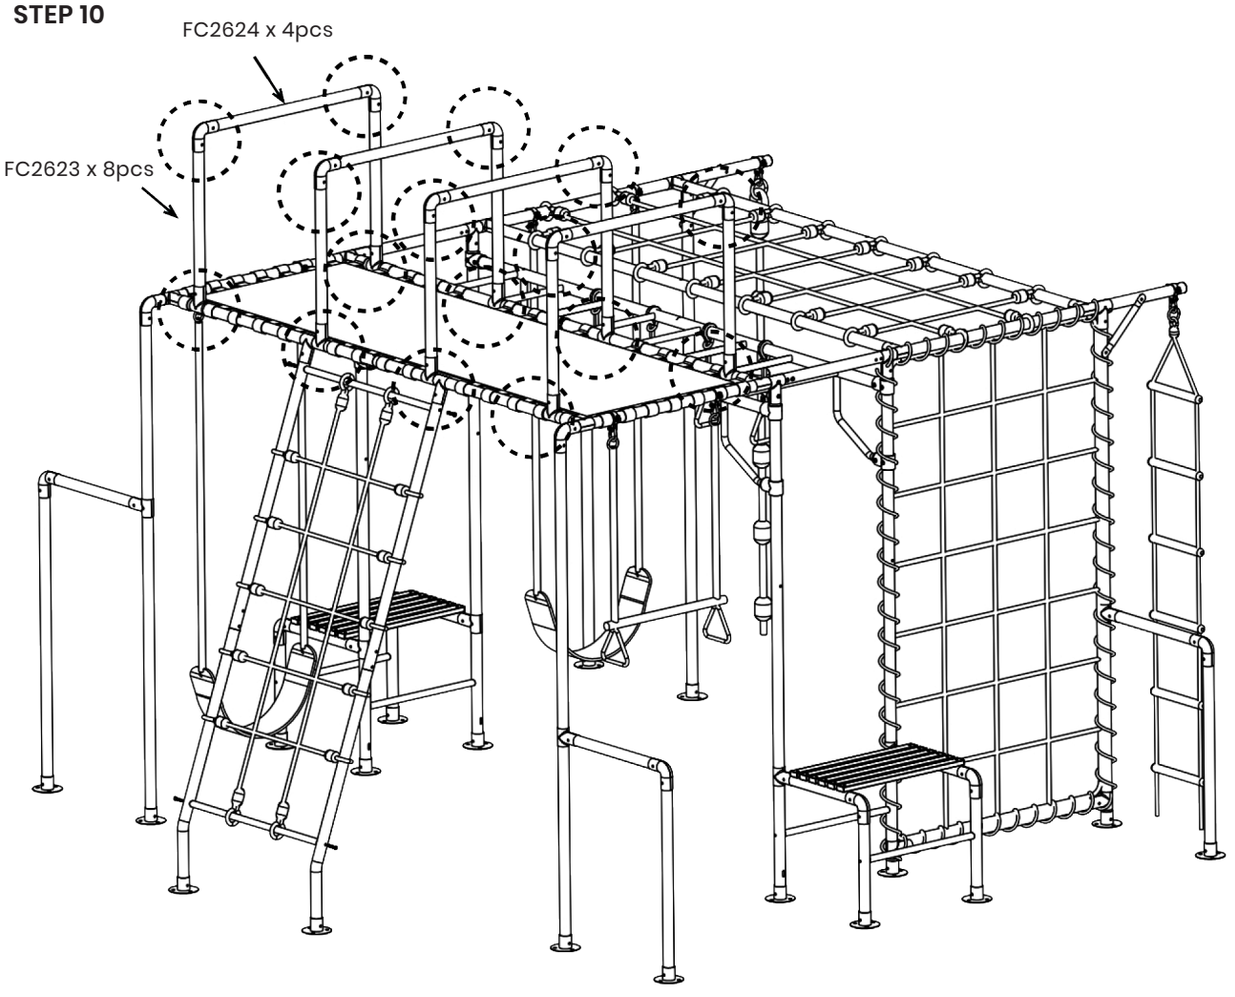


IMPORTANT:
Ensure the spring washer is fitted on the nut side.


A-M8x48mm x 32pcs









STEP 11

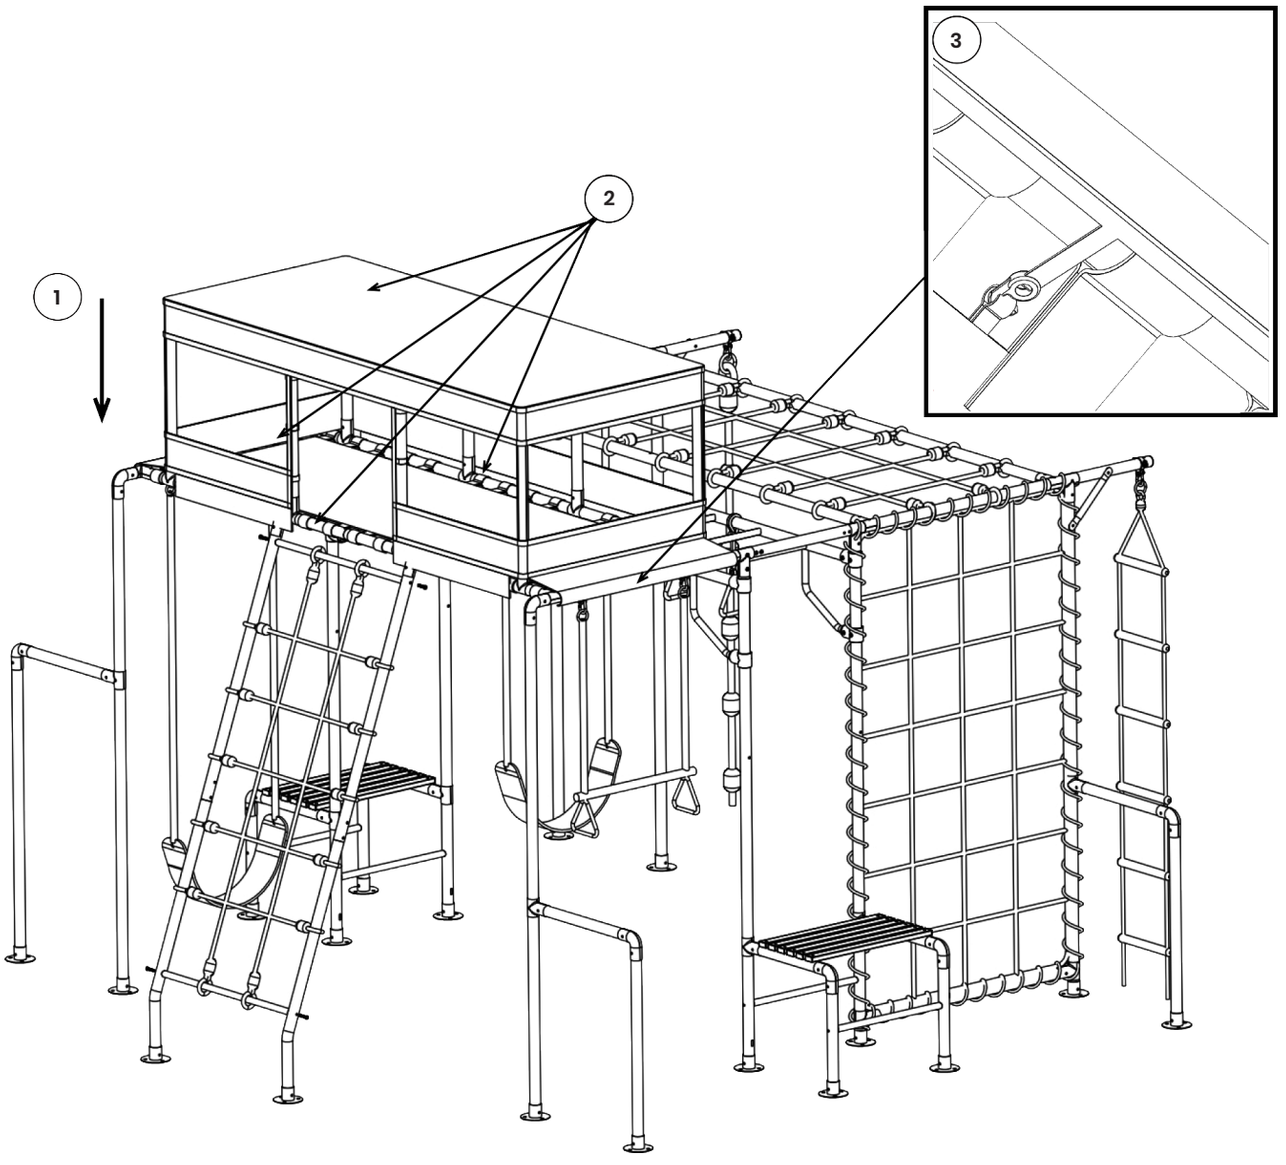

1. Fit the canopy in the orientation shown.
2. Secure all hook-and-loop straps in order.
3. Fold the skirt flap over the frame and attach the elastic hooks to the corresponding webbing loops on the platform mat.

STEP 12

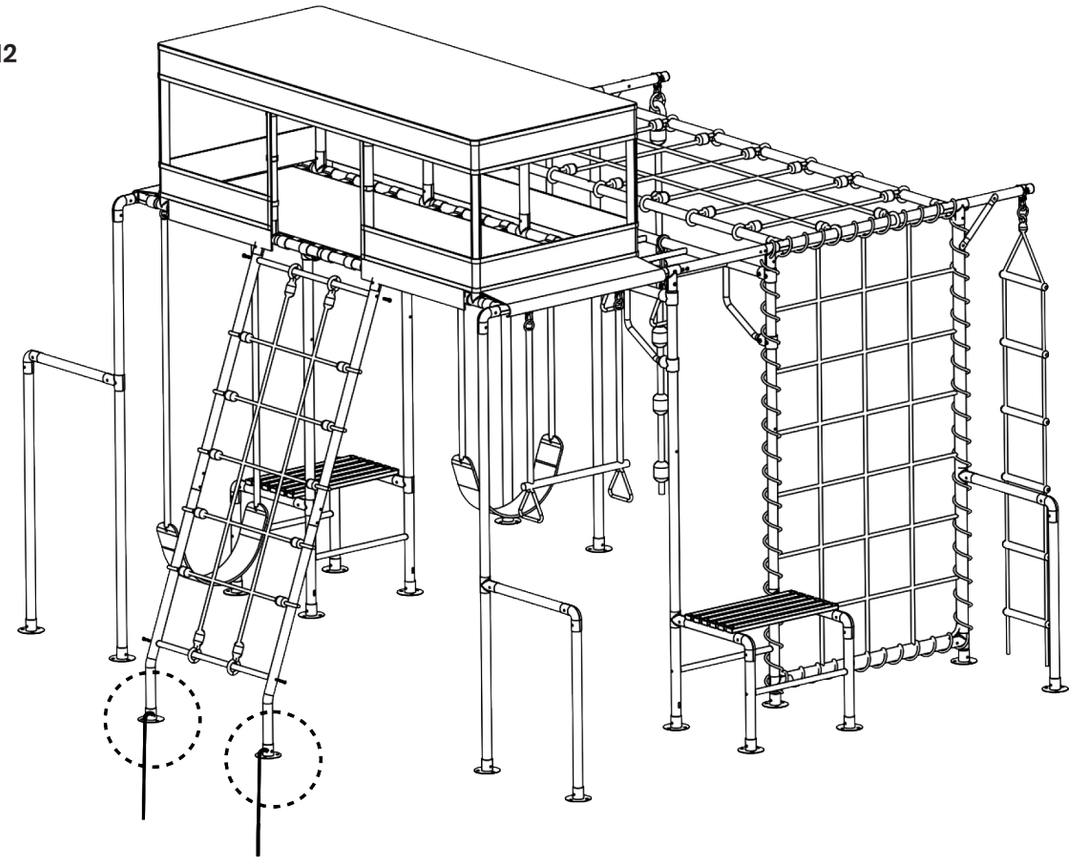

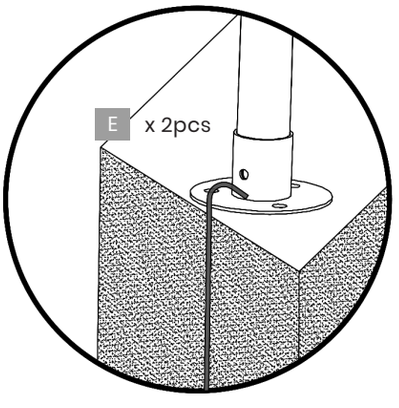

1. Position the climbing gym in its final location and check that the frame is level and stable.
2. Secure the base plates using the ground anchors (E).
3. Ensure all anchors are installed level with or below the ground surface to reduce tripping hazards.
4. Check that the spring washer is fitted on the nut side of each bolted connection.
5. **Fully tighten all bolts and fasteners before use.**

IMPORTANT:

1. The climbing gym must be securely anchored before use.
2. Install on a level surface with suitable impact-absorbing surfacing, such as sand, wood chips, rubber or other appropriate playground surfacing.
3. Do not install over concrete, asphalt or other hard surfaces.
4. Check that all handles, rope loops, anchors, base plates and frame connections are secure before each use.
5. Do not use the equipment if any component is loose, damaged or incorrectly installed.



LIFESPAN KIDS

www.lifespankids.com.au