

SM25 Multi Gym

(Dual Stack Functional Trainer, Smith Machine, Half Rack)

USER MANUAL



Product may vary slightly from the item pictured due to model upgrades.



Read all instructions carefully before using this product. Retain this owner's manual for future reference.

NOTE:

This manual may be subject to updates or changes. Up to date manuals are available through our website at www.lifespanfitness.com.au

TABLE OF CONTENTS

I.	Important Safety Instructions	03
II.	Care Instructions	04
.	Parts List	05
IV.	Assembly Instructions	80
V.	Exercise Guide	28
VI.	Maintenance	29
VII.	Warranty	30

I. IMPORTANT SAFETY INSTRUCTIONS

(!) WARNING: Read all instructions before using this machine.


To ensure your safety, read the following precautions before using this product


- Please read, study and understand the instructions and all warning labels before use. (It is recommended to be familiar with the normal operation and use methods of the device before using this product. Information is available on this manual and at local retailers).
- 2. Please keep this manual and ensure that all the warning labels are clear and complete.
- 3. This product is recommended to install by more than two people.
- 4. Please consult your doctor's advice before starting the exercise.
- 5. Please ensure safety when the children are present.
- 6. Be careful when using it with children present.
- 7. Please check any signs of wear of the wire rope regularly. If there is wear, it may cause some danger to you.
- 8. Please keep your hands, limbs and clothes stretch to use the device.
- 9. Please note any signs of machinery that may occur, including part wear, loose hardware, and welding cracks. Stop using the device with the above signs immediately and contact the after-sales service department of our company.
- 10. You can complete the assembly with a wrench, or an inner hexagon wrench.
- 11. The user weight of this product shall not exceed 100kg.
- 12. The product is subject to change without notice and the final interpretation belongs to the Division.


II. CARE INSTRUCTIONS

- Lubricate moving joints with silicon spray after periods of usage.
- Be careful not to damage plastic or metal parts of the machine with heavy or sharp objects.
- The machine can be kept clean by wiping it down using dry cloth.
- Check and adjust the tension of wire rope on a regular basis.
- Regularly check all moving parts and make sure there are signs of wear and damage, if any the use of the device must be stopped immediately and contact our after-sales department.
- During inspection, it is necessary to make sure that all bolts and nuts are completely fixed. If any bolt or nut connection is loosened, please re-tighten.
- Check weld for cracks.
- Failure to perform daily maintenance may result in personal injury or equipment damage.

III. PARTS LIST

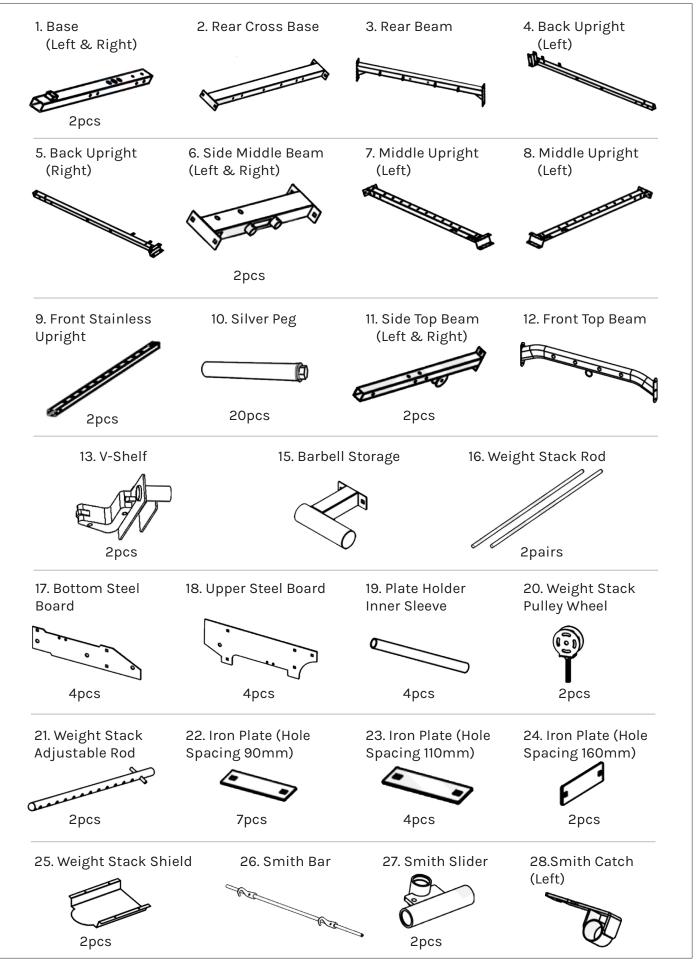

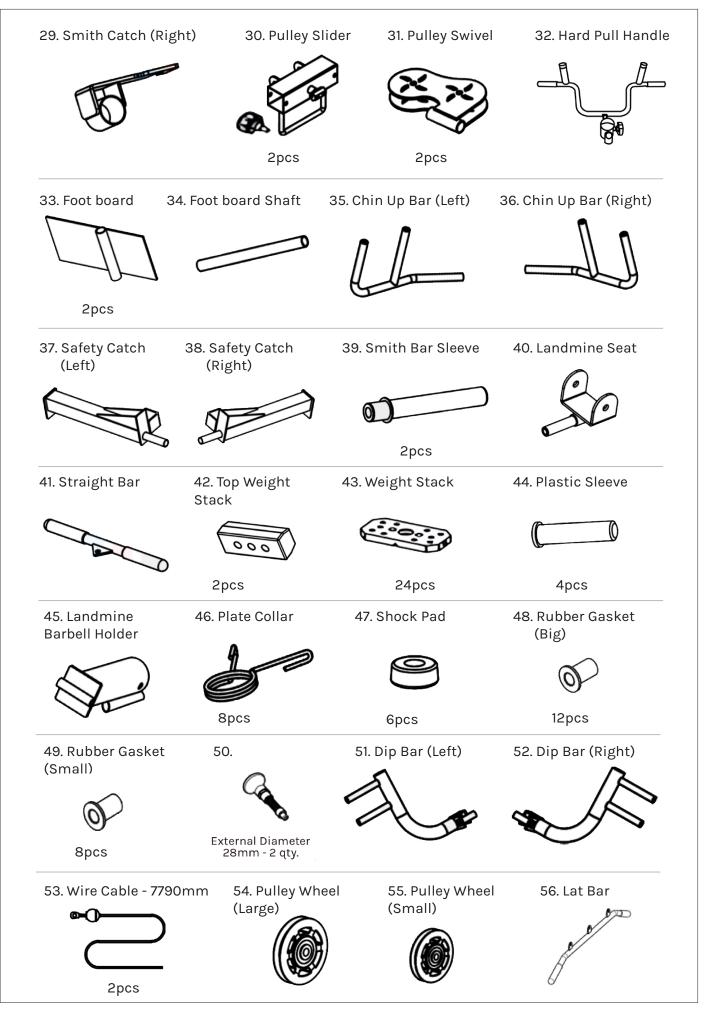

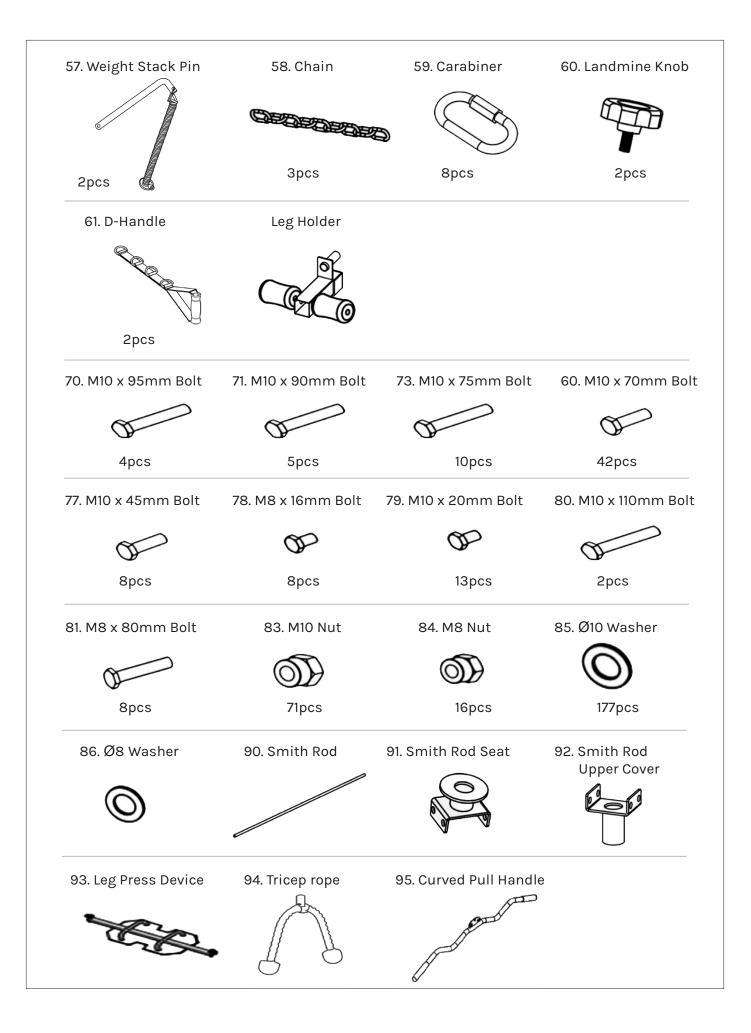

IV. ASSEMBLY INSTRUCTIONS


ATTENTION:


1. The gasket shall be placed at both ends of the bolts (against the bolt head and nuts), unless otherwise stated.

2. Some spare parts have been pre-assembled.


3. It is strongly recommended this machine to be assembled by two or more people to avoid possible injury.

4. Fully tighten the bolt on the machine at the end when assembly is completed.

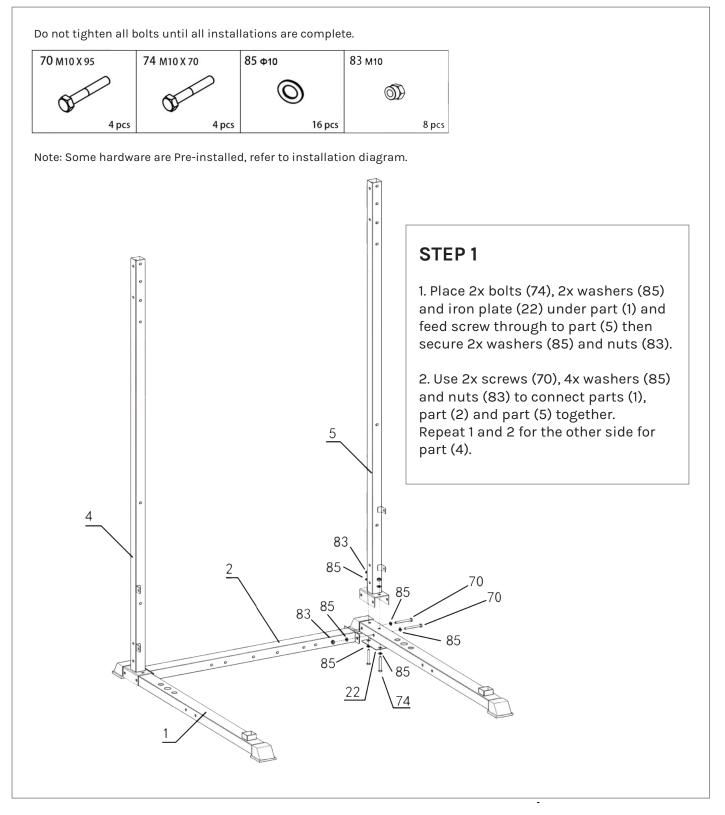

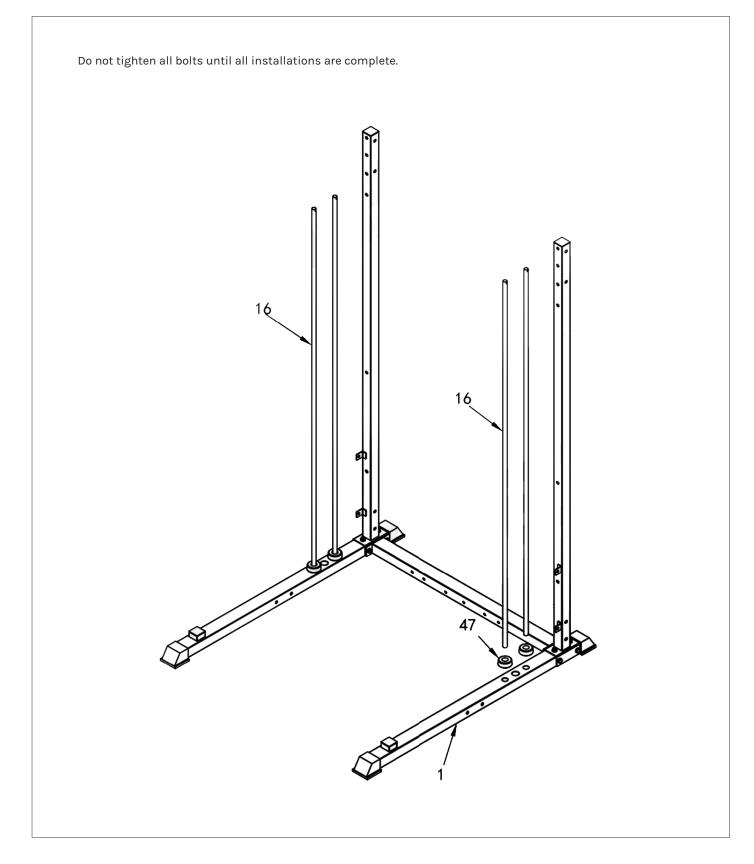


1. Add 4x shock pads (47) and 4x weight stack rods (16) to part (1) as pictured.

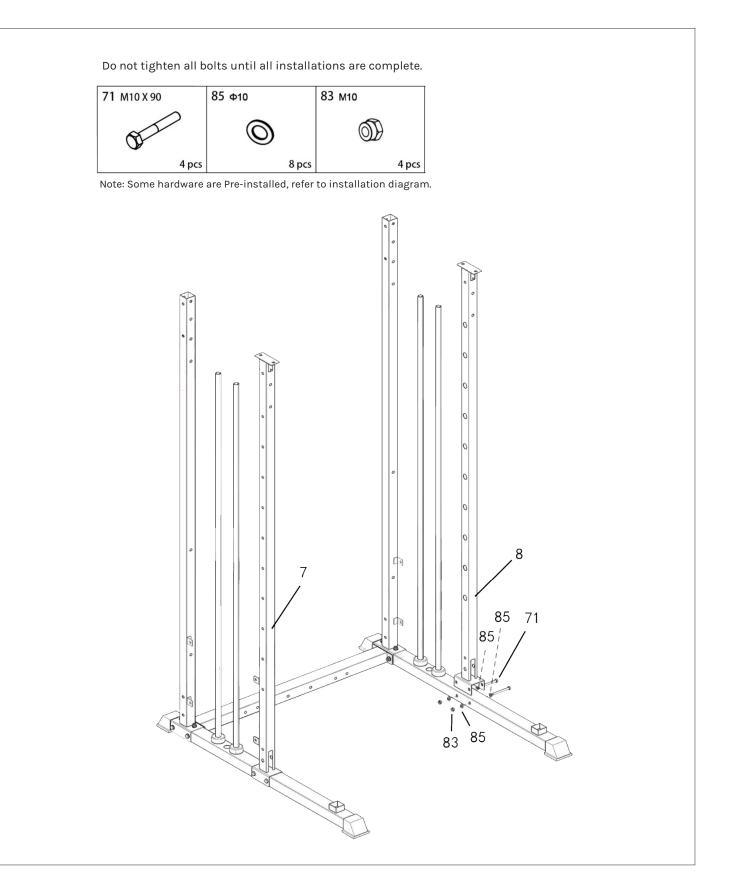

Note: the 2x bolt hole part sticking out of parts (7) and (8) should face the weight stack rod. It will be used to install the weight covers at a later step.

1. Secure part (8) to part (1) using 2x bolts (71), 4x washers (85) and 2x nuts (83) as pictured. Repeat for part (7).

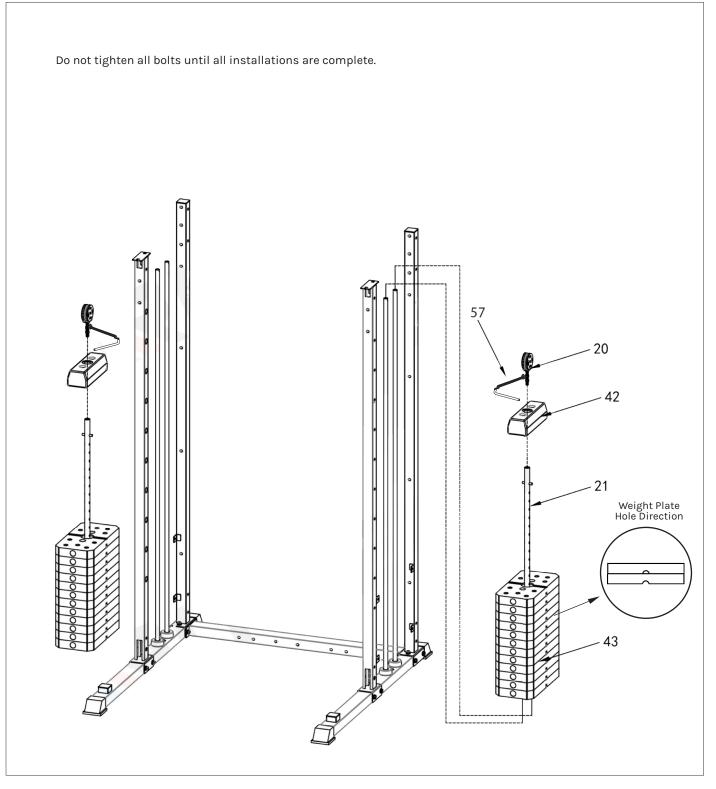


1. Place the 12x weight stacks (43) and the small weight stack (42) into the weight rods (16).

Important: The concave hole on the weight stacks MUST be at the bottom facing downwards. See the image for Weight Plate Hole Direction.


2. Place weight selector rod (21) in the middle of the weight stacks as pictured and secure weight stack pulley wheel (20) to the rod (21).

3. Attach weight stack pin (57) to part (20). Use the pin to slot into the weight stacks and choose the weight limit for your exercise.

Do not tighten all bolts until all installations are complete.

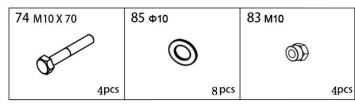


Note: Some hardware are Pre-installed, refer to installation diagram.

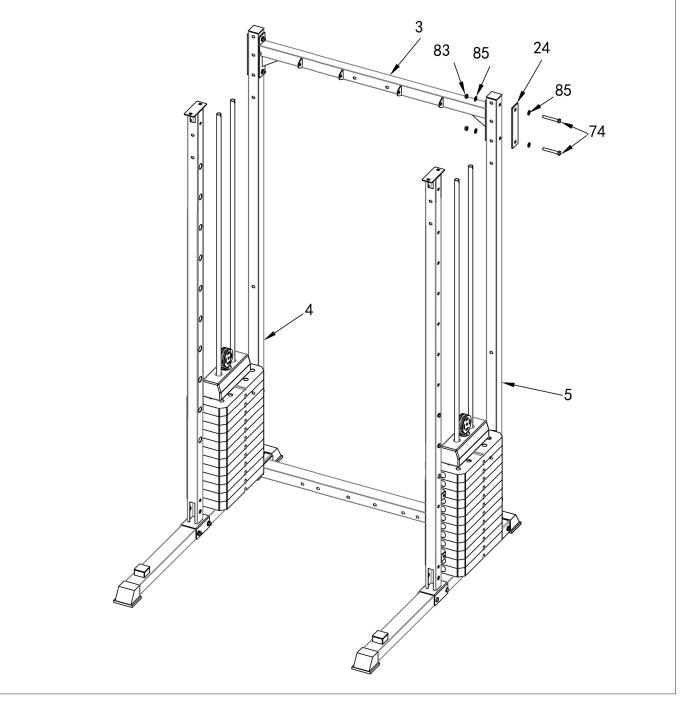

STEP 5

1. Use 2x bolts (74), 4x washers (85) and 2x nuts (83) to secure iron plate (24) to part (5) and part (3). Repeat step for the other side for part (4).

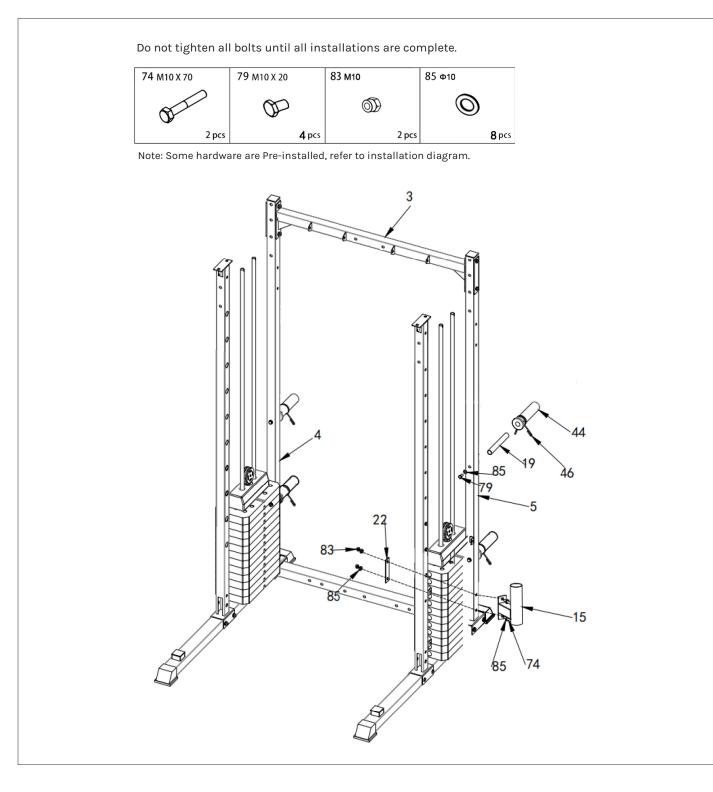


Attaching the weight storage posts:

1. Use 1x bolt (79) and 1x washer (85) to secure sleeve (19) to the hole opening on part (5) post. Repeat for the other hole opening and on the other side for part (4).


2. Add 4x Olympic sleeves (44) onto the installed holders and you can store the Olympic collars (46) onto the sleeve.

Attaching the Olympic barbell holder:

 Secure the barbell holder (15) to the side of the post
using iron plate (22), 2x bolts (74), 4x washers (85) and 2x nuts (83). Do not tighten all bolts until all installations are complete.



Note: Some hardware are Pre-installed, refer to installation diagram.

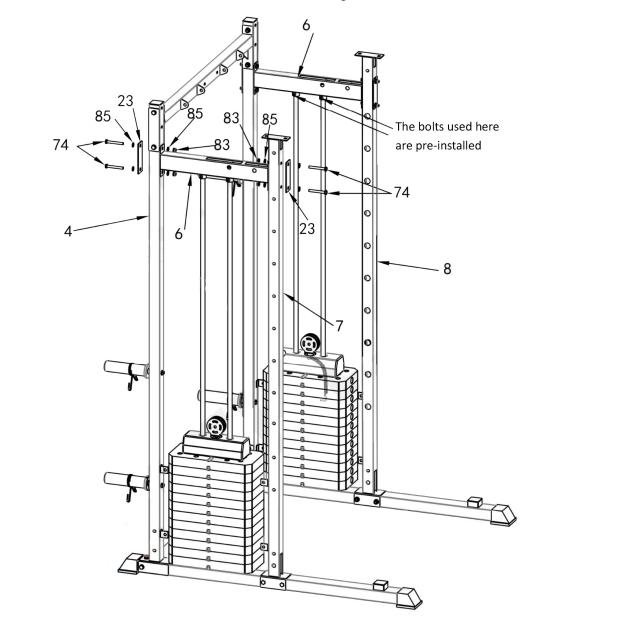


STEP 7

1. Align part (6) to the weight stack rods so that the rods slot into part (6) and secure with the preinstalled bolt on part (6).


2. Next, connect part (6) to part (4) and (7) using 2x iron plates (23), 4x bolts (74), 8x washers (85) and 4x nuts (83) as pictured.

3. Repeat for the other side.

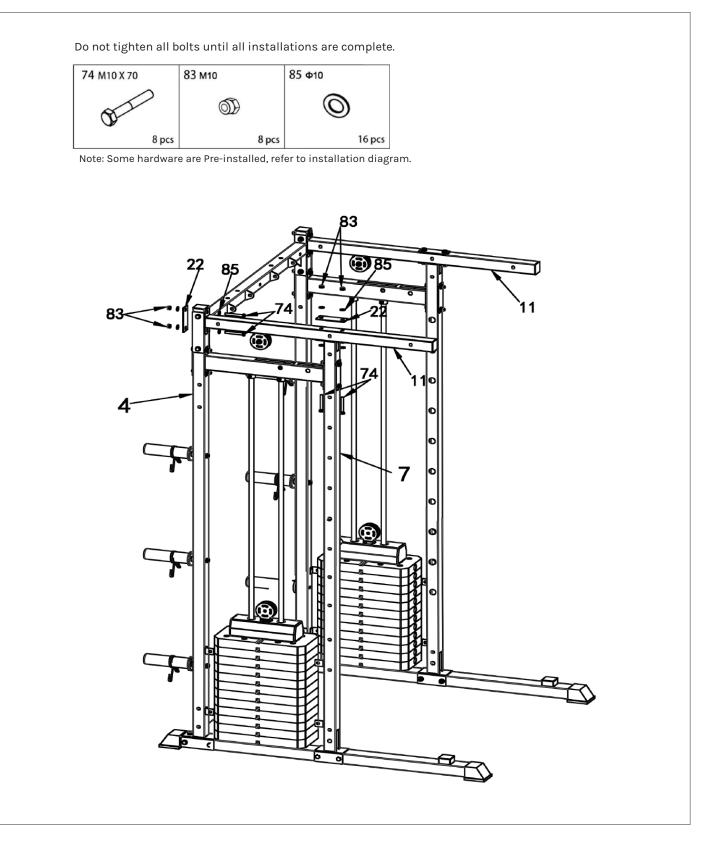

1. Secure the 2x top beams (11) to the back posts (4 & 5) using 4x bolts (74), 8x washers (85), 2x connecting plates (22) and 4x nuts (83).


2. Secure the part (11) at the front post (7 & 8) using 4x bolts (74), 8x washers (85) and 4x nuts (83).

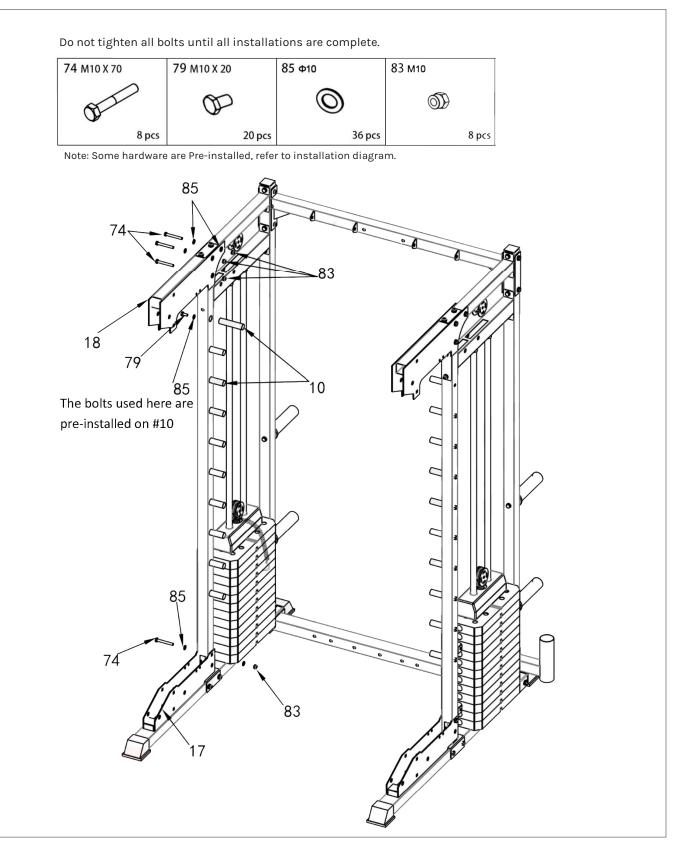


1. Attach the pegs (10) to parts (7) and (8) using the pre-installed bolts on part (10).

2. Attach the top covers (18) to part (11) using 3x bolts (74), 6x washers (85) and 3x bolts (83). Repeat for other side.

Do not tighten all bolts until all installations are complete.




Note: Some hardware are Pre-installed, refer to installation diagram.

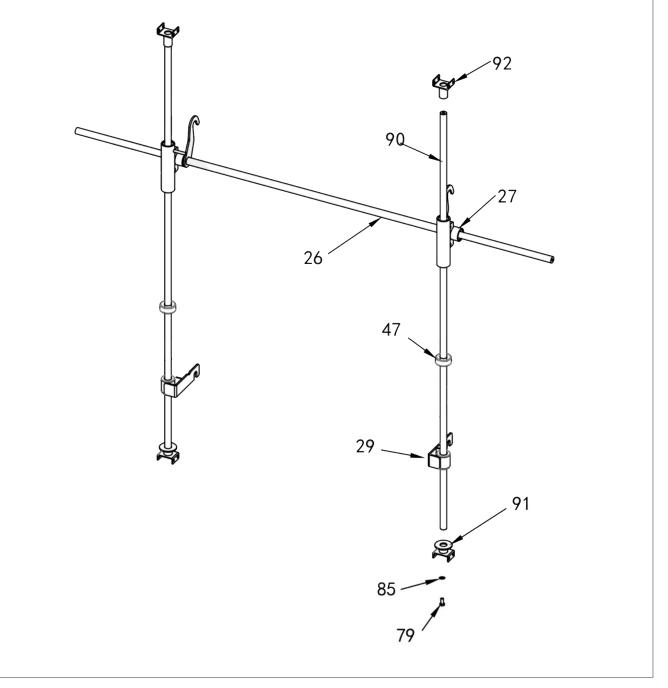


STEP 10

- 1. Attach part (91) to (90) using 1x bolt (79) and 1x washer (85). Repeat for the other side.
- 2. Place in order part (29), (47), (27) and slot (92) at the top of part (90) as pictured. Repeat for other side.
- 3. Slide rod (26) into both part (27).

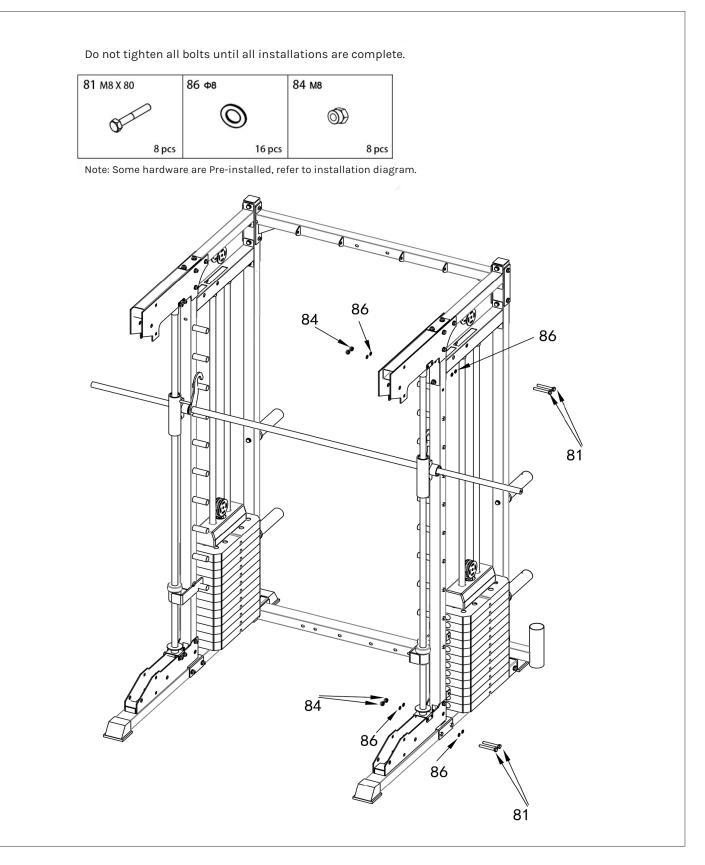


1. Place the assembled smith bar to the frame as pictured and secure to the top and bottom covers using 8x bolts (81), 16x bolts (86) and 8x bolts (84).

Do not tighten all bolts until all installations are complete.




Note: Some hardware are Pre-installed, refer to installation diagram.

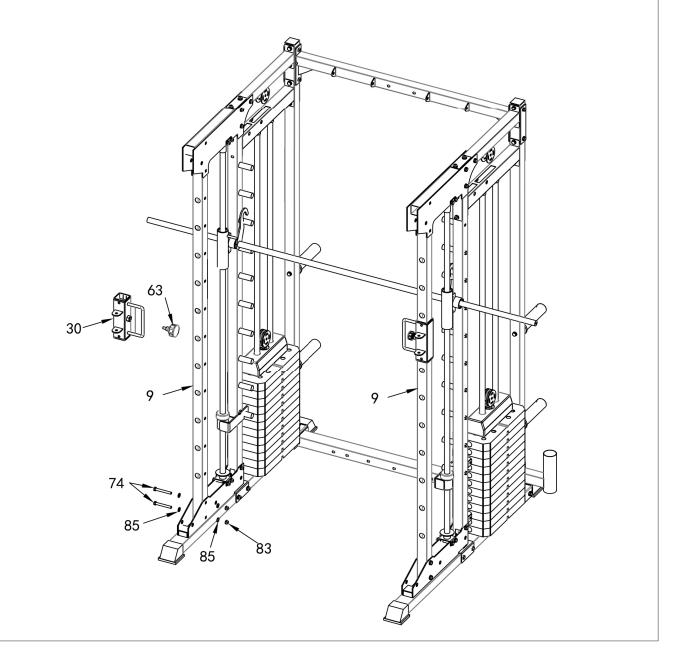

STEP 12

1. Place the 2x pulley slider (30) (one each) on the 2x part (9) and locking them with the lock pins (63, pre-installed on part 30), as pictured.

2. Align the 2x parts (9) to the hole openings on the bottom covers of the frame and secure with 4x bolts (74), 8x washers (85) and 4x nuts (83).

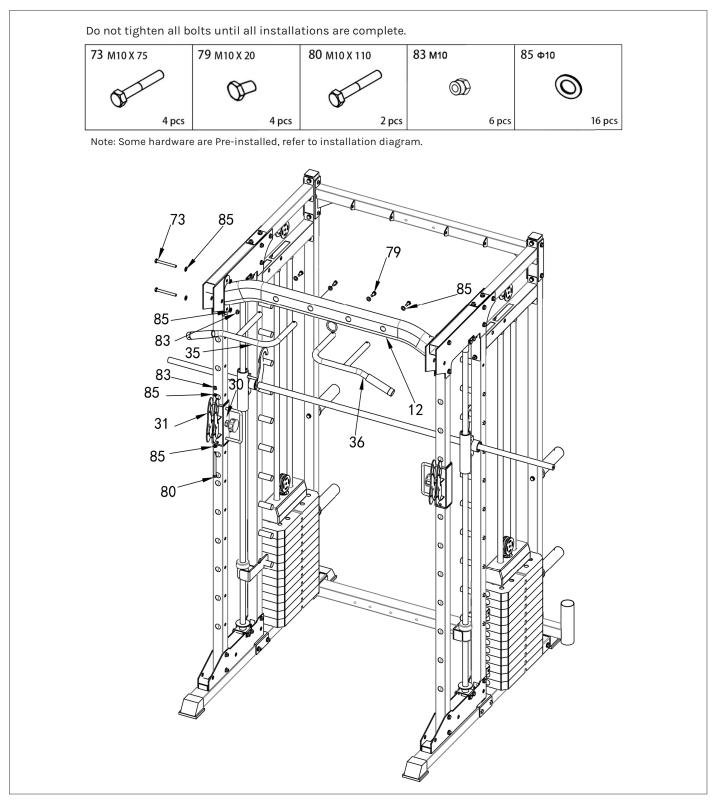


1. Use 4x bolts (73), 8x washer (85) and 4x nuts (83) to secure the 2x parts (9) to the top covers and to part (12).

2. Attach chin up handles (35) and (36) to part (12) using 4x bolts (79) and 4x washers (85).

3. Attach the pulley swivel (31) to the pulley slider (30) using 1x bolt (80), 2x washers (85) and 1x nut

(83), repeat for the other side.

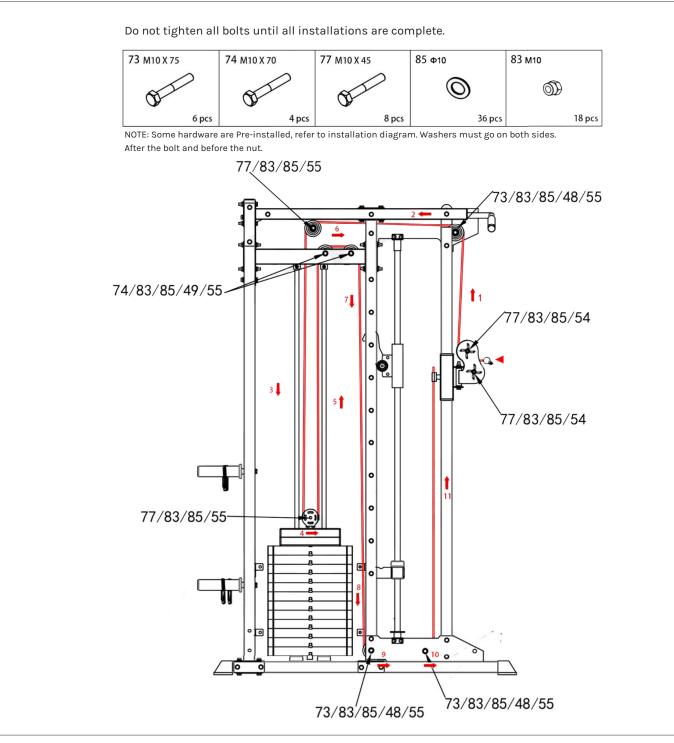


Follow the arrow for the direction of the cables and install with the parts numbers mentioned in the diagrams. Important:

- Be sure to install the wire rope before installing the pulley.
- Avoid over-tightening or under-tightening the bolts for the pulleys, as this can disrupt the smooth
- operation of the cable and potentially damage it if it comes off the track due to being too loose.
- Washers must go on both sides, after the bolt and before the nut.
- Parts 48 and 49 (if applicable) must go on either sides of the pulley.


Order of the bolt should be Bolt, Washer, Part 48 or 49 (if applicable), Pulley, Washer and Nut.

Do not tighten all bolts until all installations are complete.

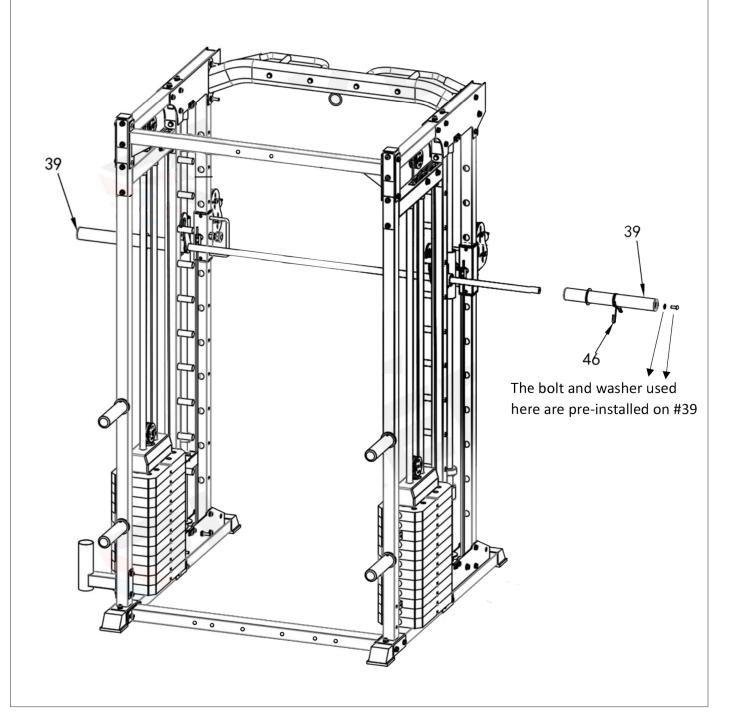

STEP 15

1. Attach Olympic sleeves (39) to the installed smith bar and secure with bolt and washer (pre-installed on part 39). Place the olympic collars (46) to sleeve when in use with weight plates or just for storage.

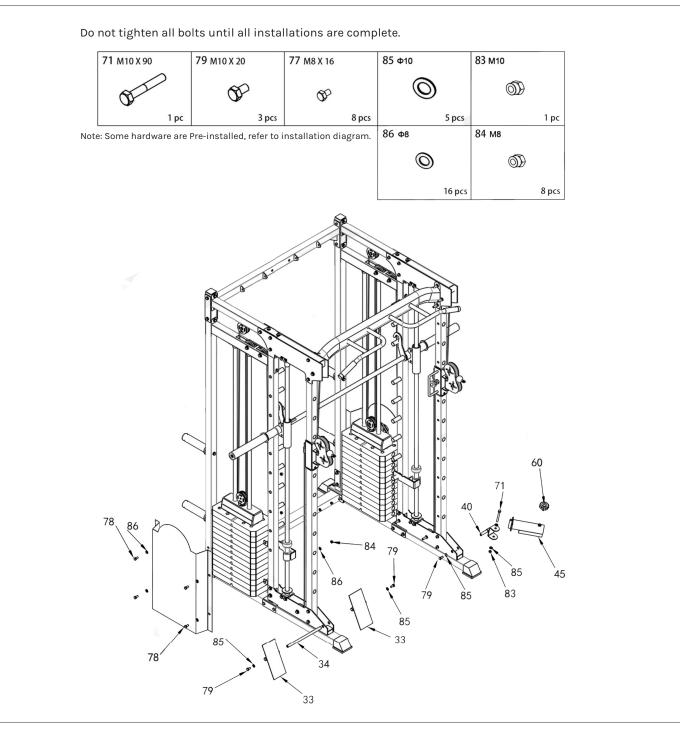

1. Attach the 2x weight stack covers (25) to the side of the weight stacks (R/L side) and secure using 4x bolts (78) and 4x washers (86) on each side.

Note: Foot plate and landmine post and can be swapped for installation, it does not need to follow diagram.

Attaching footplate:

1. Place rod (34) into the hole opening of bottom covers (17) then place on each end of the rod, the foot plate (33) as pictured. Secure using 2x bolts (79) and 2x washers (85). Attaching the landmine post:

1. Align the bolt openings for landmine barbell holder (45) to landmine seat (40) and secure using 1x bolt (70), 1x washer (85) and 1x nut (83).

2. Install the landmine seat (40) to the bottom covers (17) using 1x bolt (79) and 1x washer (85).

J-Hooks and Safety Bar

When using a separate barbell, slot the j-hooks and Safety bar to your preferred height on the holes of the front posts.


Cable Attachments

Attach the carabiner clips to the cables and then attach the bar you wish to use to the clip. Ensure to fully tighten the clip when changing your bars.

You can use the chain if you need a longer range of motion.

Dip Handle Attachment


When you wish to use the dip handles, slot them into the front column hole where the j-hooks and safety bar slots into.

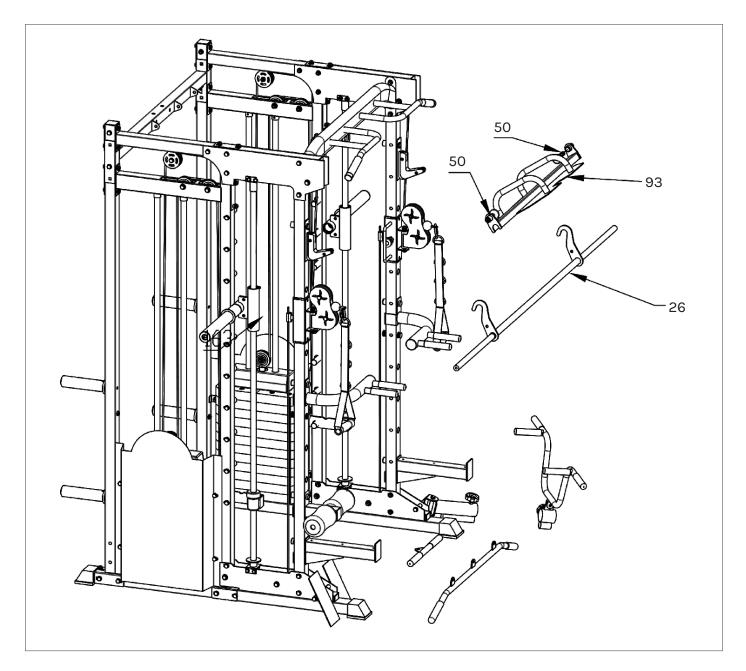

Leg Press Attachment Assembly


1. Install (# 93) at the position shown in (# 26) smith bar and secure it with (# 50) Spring pull pin.

OPTIONAL ATTACHMENT

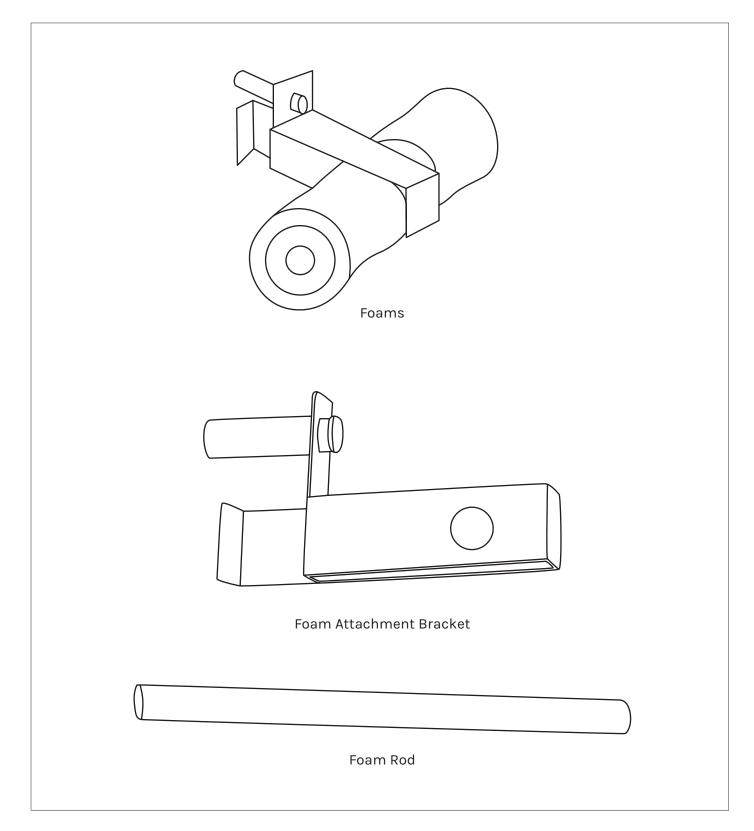


Foam Roller Attachment Assembly

- 1. Attach the Foam rods onto slot for the Foam roller attachment bracket.
- 2. Place the foams onto each end of the Rod.
- 3. Slot the attachment into the holes for the rack when using for lat pull down bar.

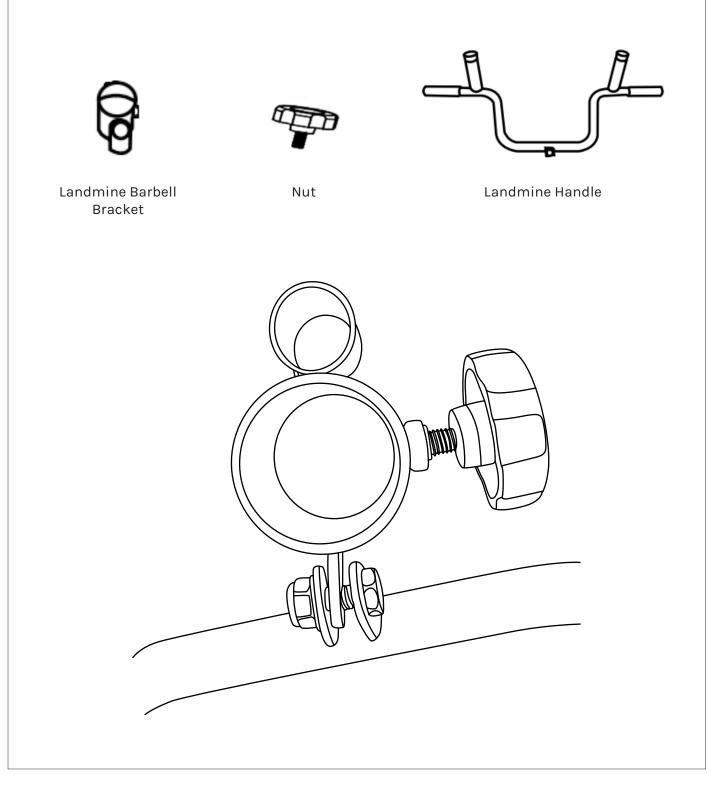

Landmine Handlebar Assembly

- 1. Bolt the landmine barbell bracket to the landmine handles (with screws from the landmine handle).
- 2. When using with separate barbell. Insert barbell into the barbell bracket and tighten with the nut.

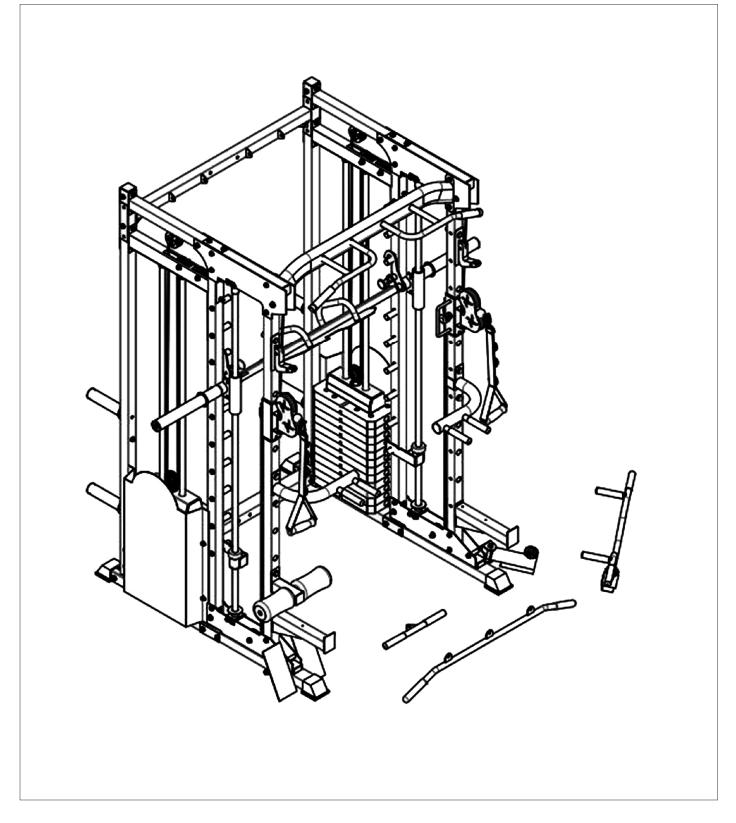

Product Installation Completed

Install the remaining auxiliary parts in the position shown in the diagram and check to lock all bolts and nuts. Here your product installation is complete.

V. EXERCISE GUIDE

! PLEASE NOTE:

Before beginning any exercise program, consult your physician. This is important especially if you are over the age of 45 or individuals with pre-existing health problems.

The pulse sensors are not medical devices. Various factors, including the user's movement, may affect the accuracy of heart rate readings. The pulse sensors are intended only as an exercise aid in determining heart rate trends in general.

Exercising is great way to control your weight, improving your fitness and reduce the effect of aging and stress. The key to success is to make exercise a regular and enjoyable part of your everyday life.


The condition of your heart and lungs and how efficient they are in delivering oxygen via your blood to your muscles is an important factor to your fitness. Your muscles use this oxygen to provide enough energy for daily activity. This is called aerobic activity. When you are fit, your heart will not have to work so hard. It will pump a lot fewer times per minute, reducing the wear and tear of your heart.

So as you can see, the fitter you are, the healthier and greater you will feel.

WARM UP


Start each workout with 5 to 10 minutes of stretching and some light exercises. A proper warm-up increases your body temperature, heart rate and circulation in preparation for exercise. Ease into your exercise.

After warming up, increase the intensity to your desired exercise program. Be sure to maintain your intensity for maximum performance. Breathe regularly and deeply as you exercise.

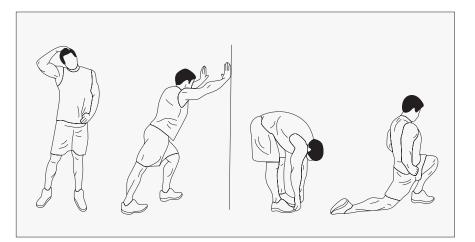

COOL DOWN

Finish each workout with a light jog or walk for at least 1 minute. Then complete 5 to 10 minutes of stretching to cool down. This will increase the flexibility of your muscles and will help prevent post-exercise problems.

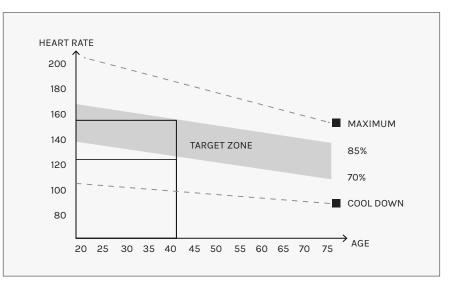

WORKOUT GUIDELINES

) This is how your pulse should behave during general fitness exercise. Remember to warm up and cool down for a few minutes.

VI. MAINTENANCE

MAINTENANCE METHOD:

To extend the service life of the device, the parts must be lubricated on time. The product has been initially lubricated before leaving the factory, but lubrication is required between the guide rod and the weight plate over time.



NOTE: Silicon oil/spray is recommended for lubrication.

- 1. Pulley and wire ropes should be regularly checked for signs of wear.
- 2. Check and adjust the tension of the wire rope regularly.
- 3. Check all moving parts regularly. If there is a damaged part, stop using the device immediately and contact the store.
- 4. Ensure all bolts and nuts are fully fixed and re-tighten them when it is loose.
- 5. Check the welding for cracks.
- 6. Failure to perform routine maintenance may cause personal injury or equipment damage.
- 7. Ensure any handle attachments are fully secured before use to prevent from injury.

VII. WARRANTY

AUSTRALIAN CONSUMER LAW

Many of our products come with a guarantee or warranty from the manufacturer. In addition, they come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage.

You are entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. Full details of your consumer rights may be found at **www.consumerlaw.gov.au**.

Please visit our website to view our full warranty terms and conditions: http://www.lifespanfitness.com.au/warranty-repairs

WARRANTY AND SUPPORT

Any claim against this warranty must be made through your original place of purchase. Proof of purchase is required before a warranty claim may be processed.

If you have purchased this product from the Official Lifespan Fitness website, please visit **https://lifespanfitness.com.au/warranty-form**

For support outside of warranty, if you wish to purchase replacement parts or request a repair or service, please visit h**ttps://lifespanfitness.com.au/warranty-form** and fill in our Repair/Service Request Form or Parts Purchase Form.

Scan this QR code with your device to go to lifespanfitness.com.au/warranty-form



